



Up to **300%** longer
tool life

1945 – 2015
70 Years

Superior Clamping and Gripping

SCHUNK ®

T | E | N | D | O® E compact

The Universal Hydraulic
Expansion Toolholder

Superior Clamping and Gripping

It's time to use your machine's full potential!


With superior components, we find potentials where you would never expect to find them. In your machine.

Make use of your machine's full potential with the extensive product portfolio from SCHUNK.

SCHUNK, the competence leader for clamping technology and gripping systems, can now open up the full potential of your processing machines and production processes. Reduce costs by combining accurate, flexible workpiece machining with dynamic production automation.

SCHUNK Synergy – when everything fits together.

With SCHUNK Synergy, you benefit from superior components from our innovative family-owned company and the result of a perfectly harmonized interplay of clamping technology and gripping systems. The more you use of SCHUNK, the more efficient your machine is.

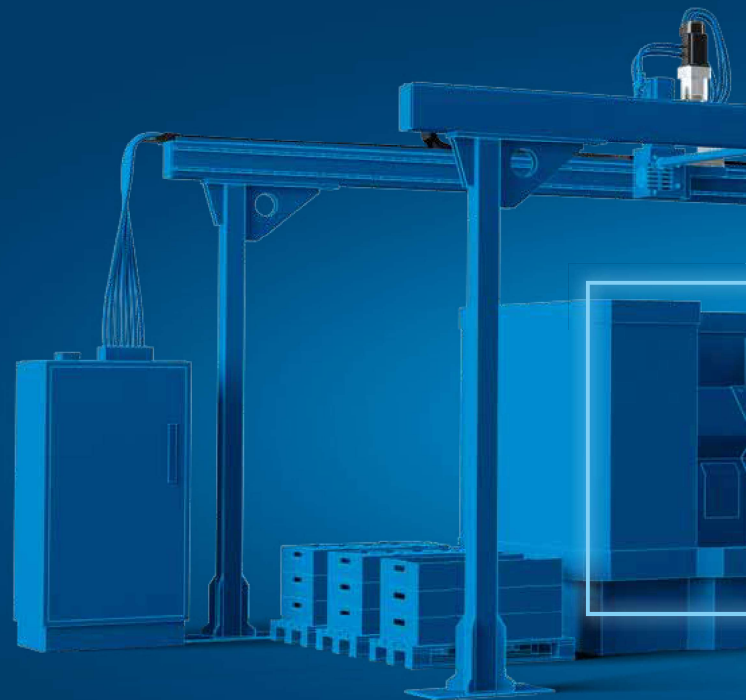



Lathe Chucks

The whole world of lathe chucks. Precise hold with full dynamics.



Magnetic Technology

5-sided machining in one set-up. Free of deformation and ready in seconds.



Toolholders

The perfect system for tool clamping.




Chuck Jaws

Unique diversity. The world's largest standard chuck jaw program from one source.



Stationary Workholding

The largest modular system for individualists. Whether it's pneumatic, hydraulic, or mechanical.

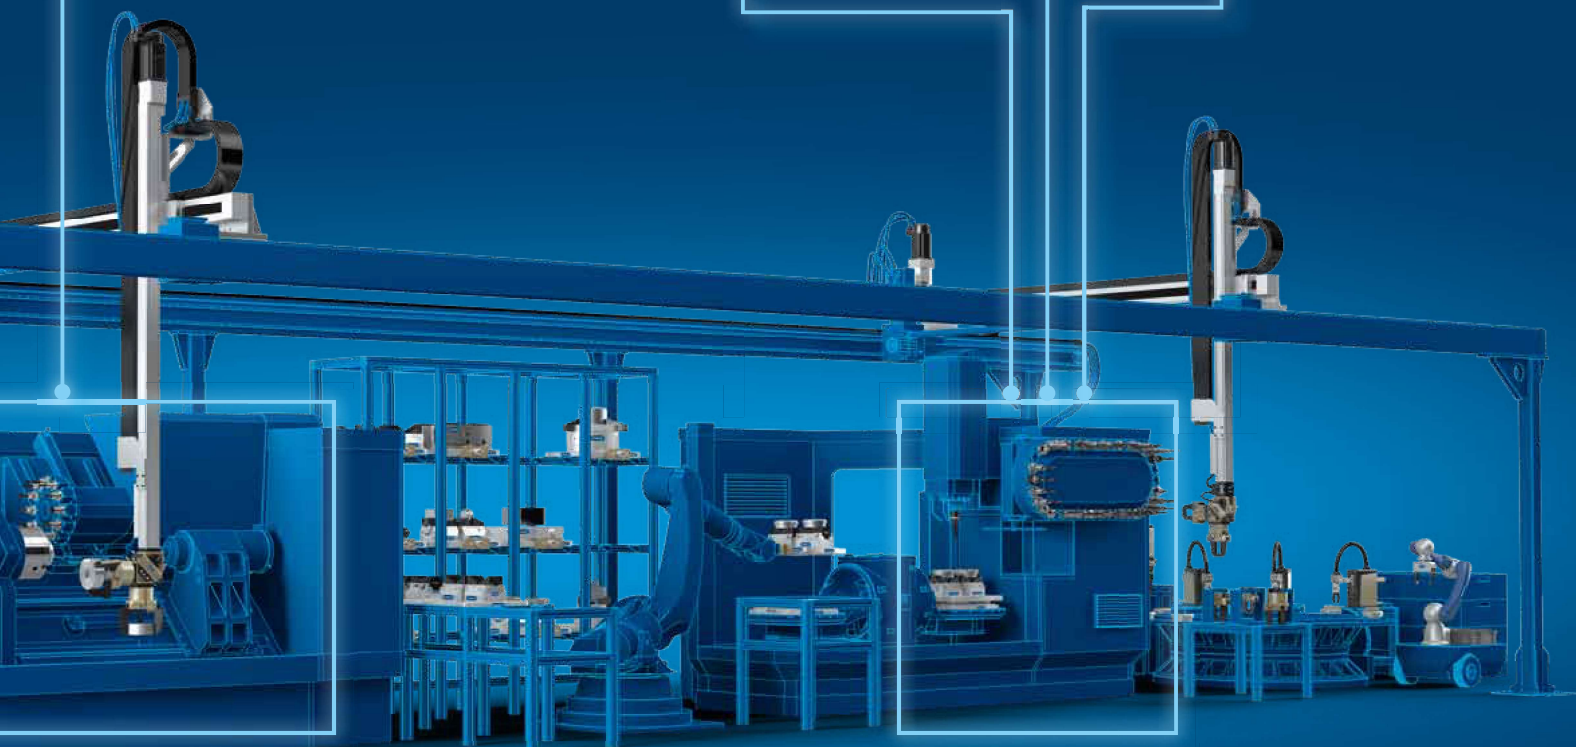

... in your Lathe

... in your Machining Center

T | E | N | D | O[®] E compact

The universal hydraulic expansion Toolholder

Up to **300%** longer
tool life*

2,000 Nm
torque with Ø 32 mm

The ultimate solution

- for all cutting tools
- for all applications: milling (roughing, finishing), drilling, tapping, reaming

*Verified in a study by the wbk Institute of Production Technology
at the Karlsruhe Institute of Technology (KIT).



www.schunk.com/tendo/wbk



T|E|N|D|O[®] E compact

The universal hydro expansion toolholder

Narrower tolerances, enormous cost pressure, better quality – TENDO E compact is the answer to growing demands in high-volume machining, which is no longer economically feasible with ER collets, heat-shrinking toolholders, Weldon mounts and lower-quality hydro expansion toolholders.

With the TENDO E compact hydro expansion toolholder, SCHUNK combines all high-performance parameters into a contemporary toolholder which satisfies and even exceeds all requirements.

TENDO E compact has an impressive price, which makes the switch from mechanical and thermal toolholders to significantly more precise TENDO quality an easy decision.



- Up to 300% longer tool life*
- Highest torques, now up to 2,000 Nm with dia. 32 mm in dry clamping conditions, 900 Nm with an oil tool shank
- Best surface finishes – no chatter marks
- Minimized noise emission
- Reduced tool costs
- Extremely fast tool change without peripheral equipment
- Long-lasting run-out and repeat accuracy < 0.003 mm

* Verified in a study by the wbk Institute of Production Technology at the Karlsruhe Institute of Technology (KIT).





Sensational! Milling at full speed! T | E | N | D | O® E compact

① Milling

TENDO E compact is the first hydro expansion toolholder that is suitable for difficult high-volume machining with up to 2,000 Nm torque with dia. 32 mm (in dry clamping conditions).

② Reaming

The outstanding vibration damping for best workpiece surfaces and long-lasting run-out for high dimensional accuracy.


③ Drilling

Drilling – one of the traditional strengths of the TENDO family. Vibration damping and run-out accuracy < 0.003 mm are also the top features of TENDO E compact.

④ Tapping

TENDO E compact is virtually predestined for tapping with its high torques and outstanding vibration damping.

Your Benefits

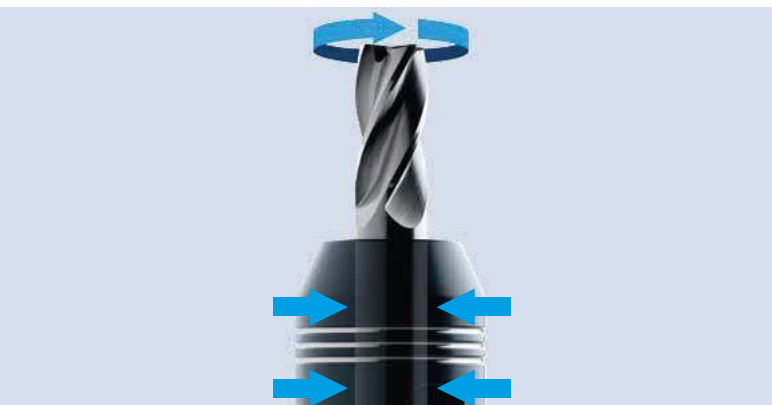

High torque of up to 900 Nm (Ø 20) and 2,000 Nm (Ø 32) for highest volume machining

Due to the compact design, holding forces and a high torque transmission are guaranteed.

Your benefit:

Highest material removal rate.




High radial rigidity for a better part geometry accuracy

The optimal radial rigidity resulting from a robust toolholder body, avoids lateral deflection during metal cutting.

Your advantage:

High part accuracy geometry at the workpiece and the highest material removal rates e.g. 400 cm³/min (25 in³/min) with 42CrM04 (4140)*.

* depending on the machine tool and the tool

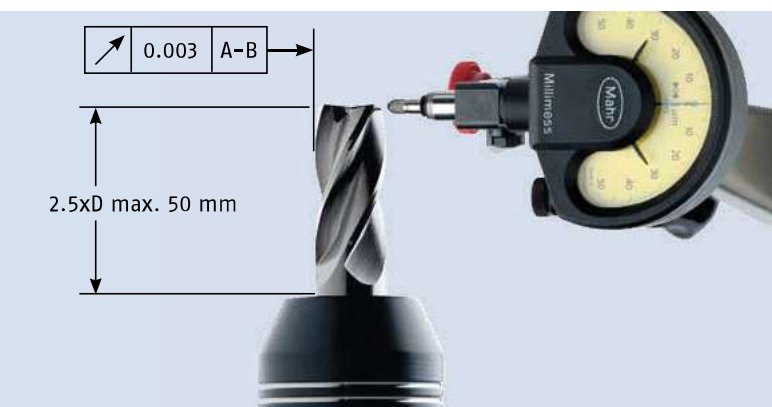

Permanent run-out accuracy of less than 0.003 mm – without any fluctuations

This assures best surface results due to a uniform cutting action and highest reproducibility.

Your advantage:

Safe and precise machining.



Excellent vibration damping

The hydraulic system absorbs vibrations, assures smooth running, and the best workpiece surfaces.

Your benefit:

High surface quality, the machine spindle is protected from damage, and service life is increased.

Tool change within seconds, micron-precise without peripheral equipment. Just screw to the dead stop

Easy handling. Turn in the actuation screw with an Allen key to the dead stop. The clamping results in a run-out accuracy of less than 0.003 mm without the need for additional peripheral equipment.

Your advantage:

Time savings due to reduced set-up times and no investment costs for additional clamping devices.




All shaft types can be clamped

With TENDO E compact all customary tools ($\varnothing$ 3 to 32 mm) with a smooth cylinder shank as well as recesses according to DIN 1835 Form B, E and DIN 6535 Form HB, HE can be clamped directly with or without intermediate sleeves.

Your advantage:

No additional costs for new tools.

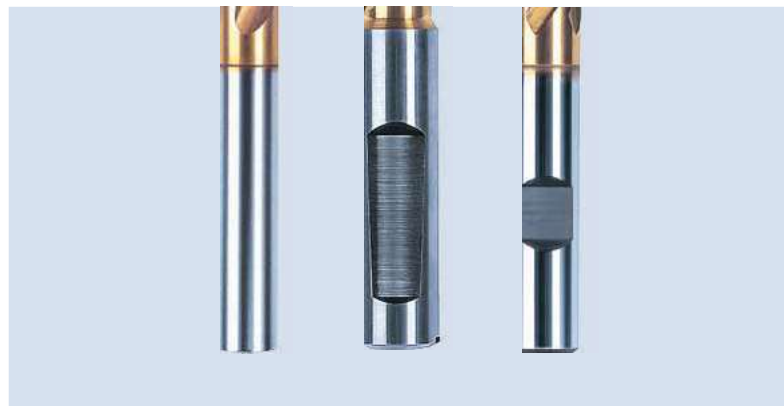

Suitable for HSC / HPC machining – precision-balanced as standard

With a balancing grade G2.5 at 25,000 rpm, the HSK-A 63 version for high speeds is perfectly suitable for HPC / HSC machining centers.

Your advantage:

Perfect for HSK high speed spindles.



Maintenance-free

The sealed system of the TENDO E compact blocks the penetration of dirt, coolant, lubricants or chips. The clamping area will not be damaged and proper function is guaranteed.

Your advantage:

Maintenance-free and a long service life.



T|E|N|D|O® E compact in Details

Innovative Hydraulic Expansion Technology

1 The actuation screw

The actuation piston is moved with the actuation screw and can be tightened to a dead stop without a torque wrench.

2 The actuation piston

The actuation piston compresses the hydraulic fluid into the chamber system.

3 The expansion sleeve and chamber system

The expansion sleeve expands against the tool shank. This clamping process first centers the tool shank before fully clamping it over the whole surface. The chamber system fills with hydraulic fluid, exerting a damping effect on the clamped tool. Wear on the cutting edge of the tool is minimized, service life is increased by up to 40 %.

4 The toolholder body

The toolholder body includes the machine interface, e.g. HSK, SK, JIS-BT, CAT, etc.

5 The length adjustment screw


For fast and easy presetting.

6 The tool

The tool is clamped centrically to the center axis – highest run-out and repeat accuracy of less than 0.003 mm

7 The groove

The enormous clamping pressure of the TENDO hydraulic expansion toolholder creates a displacement of oil, grease, or lubricant residues into the groove causing surfaces to remain dry.

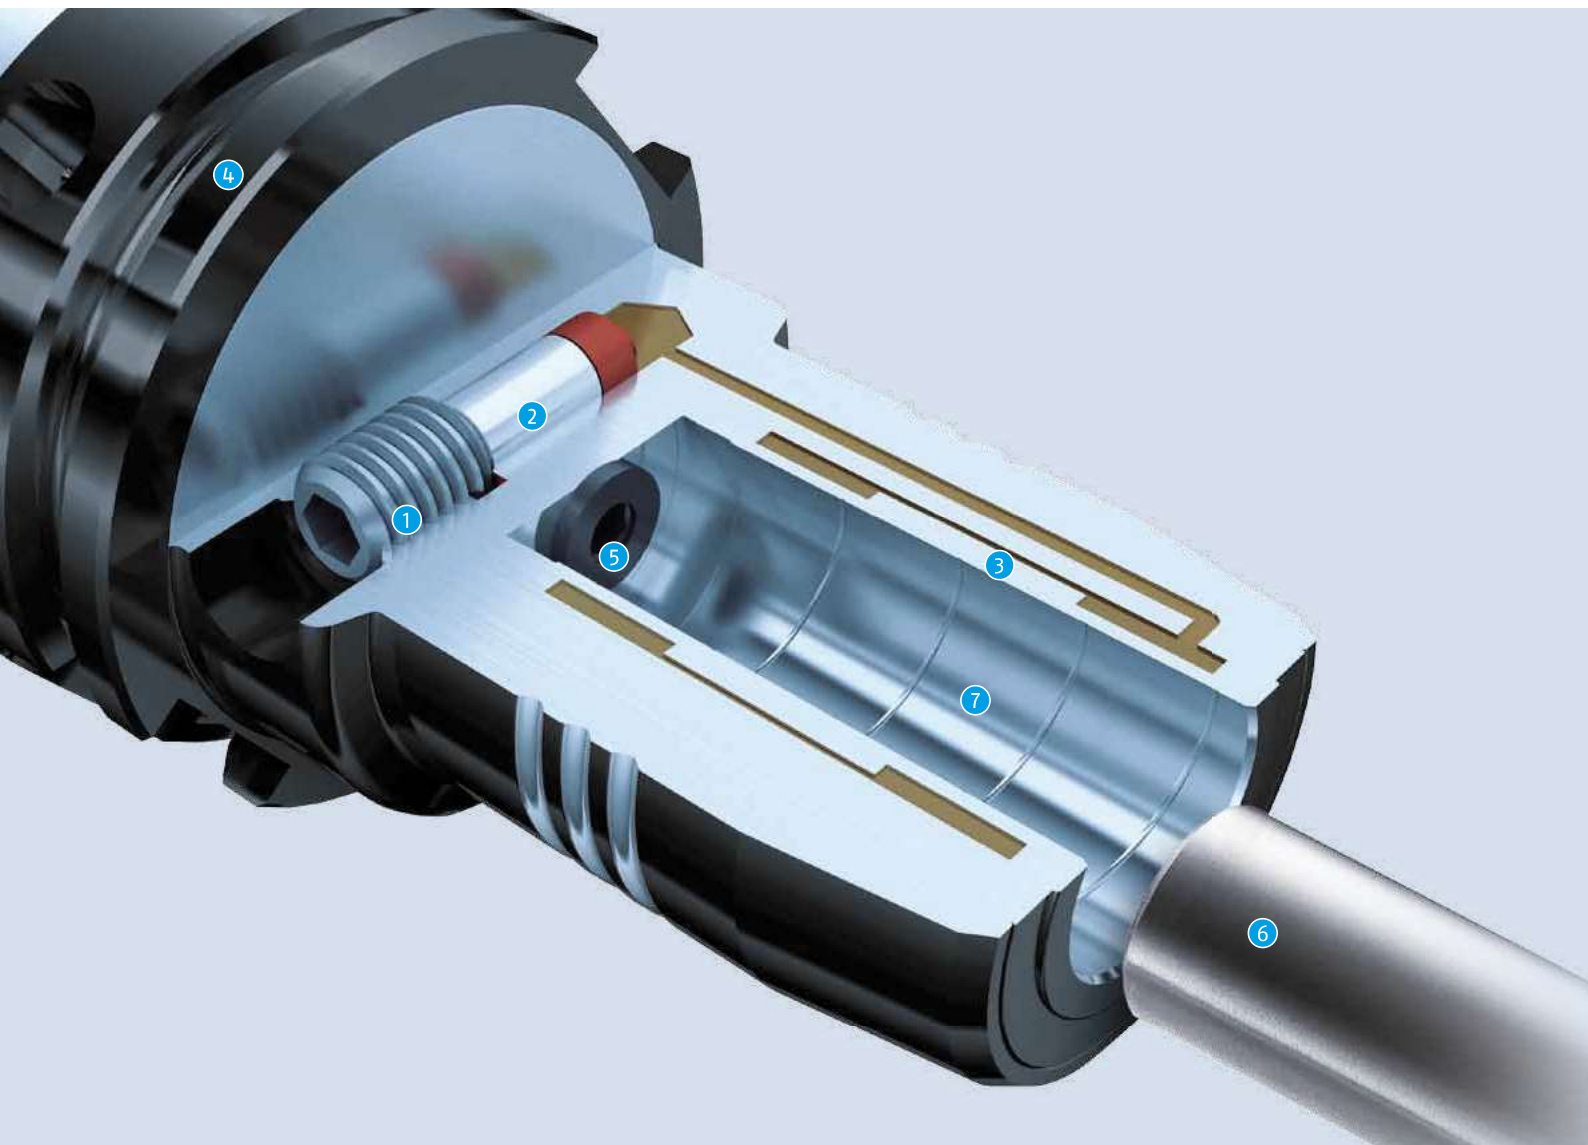

T | E | N | D | O



E compact in Comparison

Characteristics	TENDO E compact	ER collet chucks	Weldon	Heat shrinking toolholders
Run-out accuracy – Even cutting action – Influences damping and balance grade – Cost reduction	++ 0.003 mm (measured at 2.5 x D permanent)	– 0.01 – 0.02 mm	– 0.01 – 0.02 mm	+ 0.003 mm (measured inside the bore hole)
Process reliability – Permanent run-out accuracy	++	–	–	–
Torque at Ø 20 mm – Highest volume machining – Process reliability	++ up to 900 Nm	○ 220 Nm	++ Form-fit clamping	+ 420 Nm
Radial rigidity – Higher part geometry accuracy at the work-piece at rough machining – Lower cost for remachining	++	–	++	–
Damping – Increased tool service life – Prevents the machine spindle from damage – Lower costs – for remachining – Avoiding chatter marks	++	○	–	–
Flexible by using intermediate sleeves – Enlarged field of applications – Cost reduction – Higher clamping force at given shafts – Peripheral cooling	++	++ (Collet chucks)	–	–
Clamping of all shafts (Weldon, Whistle Notch, ...)	++	++	–	–
Handling and Operability – No operator training necessary – Avoids clamping errors – Low set-up costs	++	+	+	–
Resistant to dirt – No maintenance – Lower costs	++	–	+	–
Exact length pre-adjustment	++	–	–	–
Necessary peripheral equipments (regarding costs)	++ Allen key	○ Hook wrench + assembly device	○ Allen key + assembly device	– Induction unit

++ very good + good ○ neutral – bad

Summary: TENDO E compact combines all the performance parameters.

Technical Data

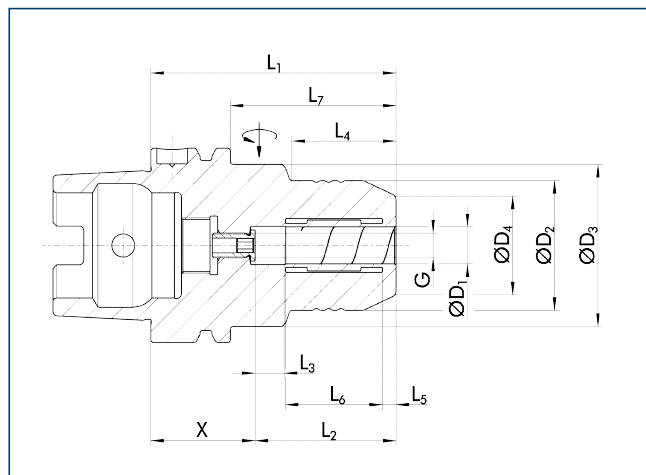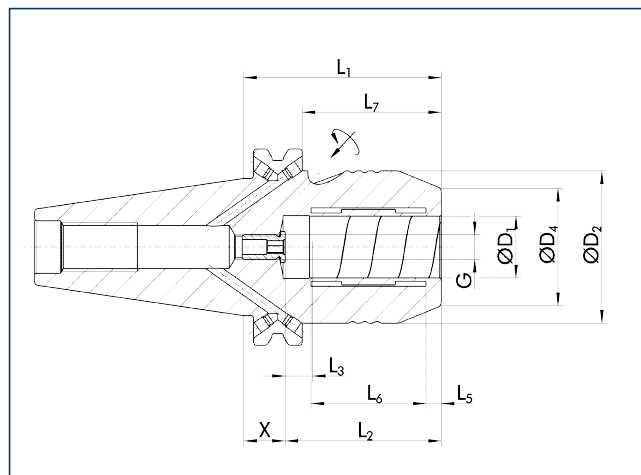HSK-A 63 / HSK-A 100

SK 40 / BT 30 / BT 40 / SK 50 / BT 50


Mounting	ID	D1	D2	D3	D4	L1	L2	L3	L4	L5	L6	L7	X	G
HSK-A 63	0206404	12.0	42.00	52.50	32.00	80.00	46.00	10.00	34.00	4.50	31.00	54.00	34.00	M8x1
SK 40	0206414	12.0	42.00	-	32.00	50.00	46.00	10.00	-	4.50	31.00	31.00	4.00	M8x1
BT 30	0206554	12.0	42.00	-	32.00	69.00	46.00	10.00	-	4.50	31.00	47.00	23.00	M8x1
BT 40	0206434	12.0	42.00	-	32.00	58.00	46.00	10.00	-	4.50	31.00	31.00	12.00	M8x1
HSK-A 63	0206405	16.0	53.00	-	38.00	80.00	51.00	10.00	-	5.00	37.00	54.05	29.0	M8x1
SK 40	0206415	16.0	49.25	-	38.00	64.50	51.00	10.00	-	5.00	37.00	45.45	13.5	M8x1
BT 40	0206435	16.0	49.25	-	38.00	72.50	51.00	10.00	-	5.00	37.00	45.50	21.50	M8x1
HSK-A 63	0206406	20.0	52.50	-	38.00	80.00	51.00	10.00	-	5.00	37.00	54.00	29.00	M8x1
HSK-A 100	0206566	20.0	52.50	-	38.00	90.0	51.00	10.00	-	5.00	37.00	61.05	39.00	M8x1
SK 40	0206416	20.0	49.25	-	38.00	64.50	51.00	10.00	-	5.00	37.00	45.50	13.50	M8x1
SK 50	0206426	20.0	49.25	-	38.00	64.50	51.00	10.00	-	5.00	37.00	45.50	13.50	M8x1
BT 30	0206556	20.0	42.00	-	38.00	90.00	51.00	10.00	-	5.00	37.00	47.00	39.00	M8x1
BT 40	0206436	20.0	49.25	-	38.00	72.50	51.00	10.00	-	5.00	37.00	45.50	21.50	M8x1
BT 50	0206446	20.0	49.25	-	38.00	83.50	51.00	10.00	-	5.00	37.00	45.50	32.50	M8x1
HSK-A 100	0206568	32.0	72.00	-	58.50	100.0	61.00	10.00	-	6.00	44.00	71.05	39.00	M8x1
SK 50	0206428	32.0	72.00	-	58.50	81.00	61.00	10.00	-	6.00	44.00	62.00	20.00	M8x1
BT50	0206448	32.0	72.00	-	58.50	90.00	61.00	10.00	-	6.00	44.00	52.00	29.00	M8x1

Cleaning Unit RGG

A sparkling clean Machine Table – all by itself

The easiest way to clean. The RGG cleaning unit from SCHUNK is designed for cleaning workpieces and the interior of the machine with air or coolant. It fits in any sealed toolholder with a clamping diameter of 20 mm, and reduced auxiliary process times in every machine tool.


A total of six nozzles on the ball head blow out a powerful jet of air or coolant, which is forced from the toolholder mounting via a bore hole in the shank of the cleaning unit. The head can also rotate with the tool spindle when it moves, and can reach all corners of the working area.

Advantages:

- Low price unit for flexible automation of your machine
- Fast, automatic cleaning for a maximum utilization of your machine
- Auxiliary process times are reduced to a minimum
- Increased safety for the machine operator
- Suitable for any SCHUNK toolholder mount (except heat shrink)



Sectional functional diagram

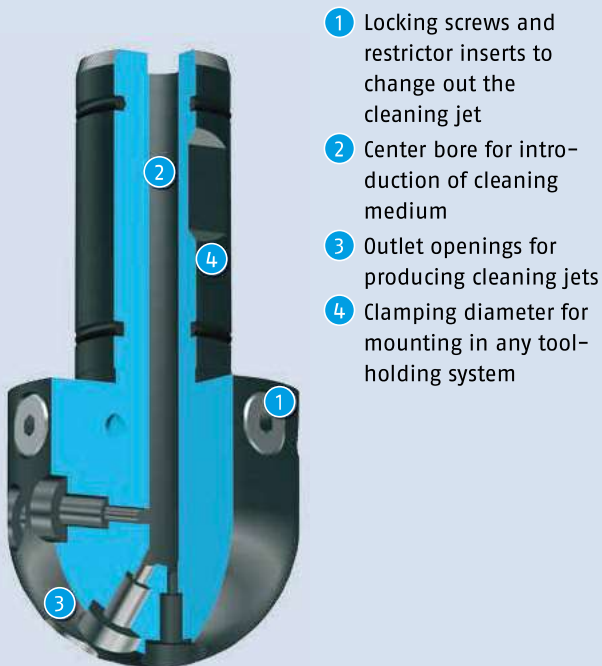

Technical Data

Description	ID	Clamping range	Dead weight
RGG	0308590	20 mm	0.1 kg

Intermediate Sleeves GZB-S

Flexible clamping areas covered by intermediate sleeves

SCHUNK intermediate sleeves allow clamping of several, different shank diameters with just one toolholder. The universal intermediate sleeves GZB-S are available in two versions: sealed coolant-proof, and with innovative peripheral coolant channels. Both offer the unbeatable advantages of SCHUNK intermediate sleeves. And both can be used in the SCHUNK toolholding systems **TENDO**, **TRIBOS**, **SINO-R**, and all standard hydraulic expansion toolholding systems.

Your advantage:

- Highest flexibility for optimal cost control
One toolholder for several clamping diameters
- Versatile length pre-adjustment due to moveable intermediate piece
- Increasing metal removal than in case of direct clamping, due to a higher torque

Product features:

- Two versions: Coolant-proof up to 80 bar or with peripheral coolant
- Run-out accuracy of less than 3 microns
- Intermediate sleeves with peripheral coolant 6 coolant slots with special nozzle geometry
- Intermediate sleeves are coolant-proof
- Additional sizes and special designs are available on request




Systematic cooling with peripheral coolant channels

Six coolant slots now make a difference with peripheral coolant. With their special nozzle geometry, they ensure optimal and directed supply of coolant to the blade.

Your advantages with peripheral coolant channels:

- Optimized coolant emission
- Increase of the tool service life
- Optimal chip removal by systematic coolant rinsing
- Significantly improved machining results

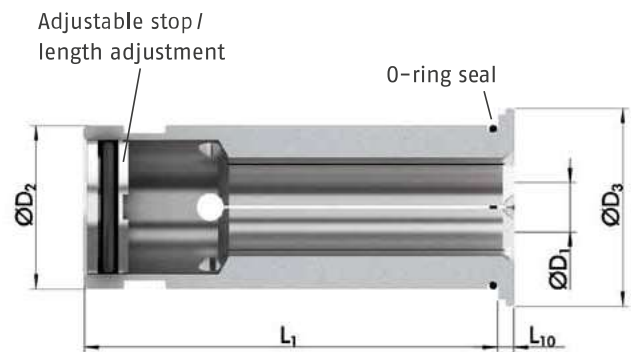

Optimized coolant emission:
GZB-S 20/16 for peripheral cooling
in a TENDO E compact.

Toolholders from SCHUNK

A system for perfect tool clamping.

Toolholders from SCHUNK. A system for perfect tool clamping.



Toolholders from SCHUNK

Every specific application has other demands to the toolholder. Particularly, when it comes to precision, compromises cannot be accepted. Here, SCHUNK uses its technologies. The innovative and high-precision toolholders cover a unique range of customer requirements. From micro to finest processing, up to heavy-duty and volume machining.


Discover the program diversity of SCHUNK.

We focus on special applications, and find the optimal toolholder for your machining task.

Request our catalog for Toolholders now.




SCHUNK Toolholders

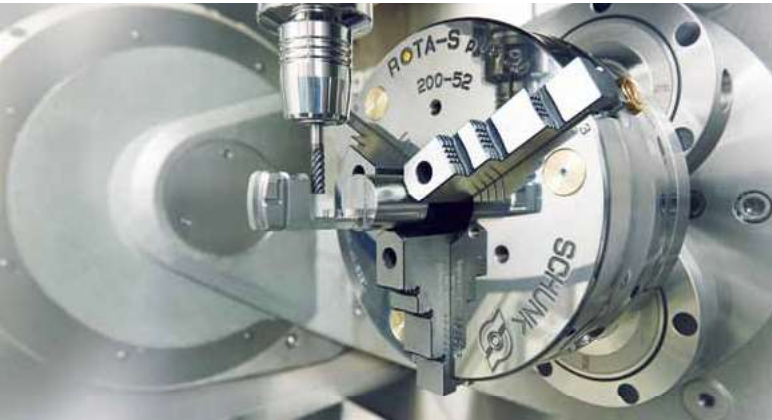

TENDO Hydraulic Expansion Toolholders

"The original" **TENDO** is the technological leader of hydraulic expansion toolholders from SCHUNK – universal in use, efficient and absolutely precise. Profit from the unique features of the **TENDO** family: **TENDO** with consistent run-out and repeat accuracy of <0.003 mm for roughing, drilling, reaming and finishing.

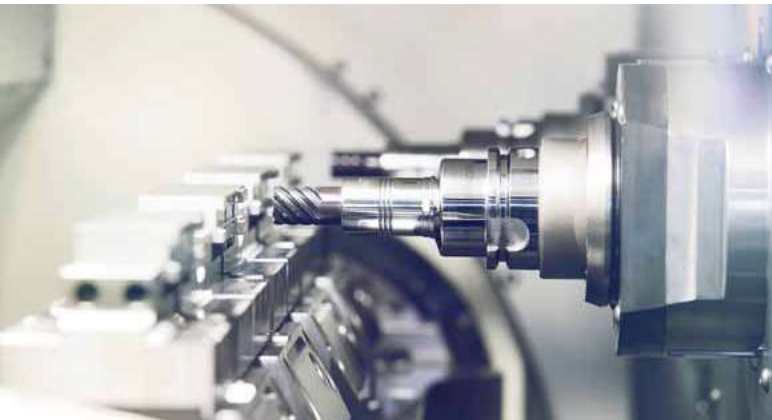

TRIBOS Polygonal Clamping

With the **TRIBOS** polygonal technology, SCHUNK offers a tooling system with a flexible and comprehensive spectrum of applications – from heavy-duty cutting to micro cutting. Excellent features of centric run-out of 0.003 mm result in longer lifetime and better surface quality. **TRIBOS** polygonal clamping technology is suitable for HSC and tested up to 205,000 rpm.



SINO-R Expansion Toolholders

With **SINO-R**, SCHUNK offers an expansion toolholder based on expansion toolholding technology. Three features make the **SINO-R** series unbeatable for thread milling in terms of quality and productivity: The high radial rigidity, which prevents the deflection of the tool, the higher torque transfer for full utilisation of the tool capability, and the top vibration damping for the best thread surfaces without chatter marks. This is assured by an unbeatable combination of a monoblock design, a multi-layer system structure and thicker walls.

SCHUNK Service



Competent and skilled personnel ensure optimal availability of your SCHUNK products, and make sure that their value will be maintained.

Your advantage:

- Fast supply of original spare parts
- Reduction of down-times
- The complete spectrum of components from one source
- Quality and availability that can only be guaranteed by the original manufacturer
- 12-month warranty



Initial operation

- Professional assembly
- Fast and trouble-free



Inspection

- Inspection is carried out by skilled service engineers
- Avoiding unplanned failures of workholding and toolholding equipment



Maintenance

- Regular maintenance carried out by skilled service engineers
- Increasing and ensuring the availability of your workholding and toolholding equipment



Repairs

- Short down-times due to fast intervention of the SCHUNK service engineers
- Spare parts and accessories

Training

- Fast and practical training
- Efficient use of your SCHUNK products by training of the operating personnel
- The basis for proper machining of workpieces
- Ensures longevity of your SCHUNK products

Individual service – for better results

- Hotline to our inside technical consultants weekdays from 7 a.m. to 6 p.m.
- Project-oriented and on-site technical advice at your location
- Training on innovations and SCHUNK products – across the world in our local subsidiaries

Online service – for a fast overview

All information in digital form, clearly structured and up-to-date on our website at www.schunk.com

- List of contact persons
- Online product search based on product descriptions
- Product news and trends
- Data sheets
- Order forms for easy and convenient ordering
- Free download area for pages from our product catalogs and technical data, for software and calculation programs for your gripping and rotary modules
- Free 2-D / 3-D CAD design models, provided in a wide range of different CAD formats – for easy integration into your design!





Germany – Head Office

SCHUNK GmbH & Co. KG
Spann- und Greiftechnik
Bahnhofstr. 106 – 134
74348 Lauffen/Neckar
Tel. +49-7133-103-0
Fax +49-7133-103-2399
info@de.schunk.com
www.schunk.com



Austria

SCHUNK Intec GmbH
Friedrich-Schunk-Straße 1
4511 Allhaming
Tel. +43-7227 223 99-0
Fax +43-7227 210 99
info@at.schunk.com
www.at.schunk.com



Belgium, Luxembourg

SCHUNK Intec N.V./S.A.
Industrielaan 4 | Zuid III
9320 Aalst-Erembodegem
Tel. +32-53-853504
Fax +32-53-836351
info@be.schunk.com
www.be.schunk.com



Brazil

SCHUNK Intec-BR
Av. Santos Dumont, 733
BR 09015-330 Santo André – SP
Tel. +55-11-4468-6888
Fax +55-11-4468-6883
info@br.schunk.com
www.schunk.com



Canada

SCHUNK Intec Corp.
370 Britannia Road E, Units 3
Mississauga, ON L4Z 1X9
Tel. +1-905-712-2200
Fax +1-905-712-2210
info@ca.schunk.com
www.ca.schunk.com



China

SCHUNK Intec Precision Machinery Trading
(Shanghai) Co., Ltd.
Xinzhuang Industrial Park,
1F, Building 1, No. 420 Chundong Road,
Minhang District
Shanghai 201108
Tel. +86-21-54420007
Fax +86-21-54420067
info@cn.schunk.com
www.cn.schunk.com



Czech Republic

SCHUNK Intec s.r.o.
Drážní 7b | 627 00 Brno-Slatina
Tel. +420-531-022066
Fax +420-531-022065
info@cz.schunk.com
www.cz.schunk.com



Denmark

SCHUNK Intec A/S
c/o SCHUNK Intec AB
Morabergsvägen 28
152 42 Södertälje Sweden
Tel. +45-43601339
Fax +45-43601492
info@dk.schunk.com
www.dk.schunk.com



Finland

SCHUNK Intec Oy
Hatanpään valtatie 34 A/B
33100 Tampere
Tel. +358-9-23-193861
Fax +358-9-23-193862
info@fi.schunk.com
www.fi.schunk.com



France

SCHUNK Intec SARL
Parc d'Activités des Trois Noyers
15, Avenue James de Rothschild
Ferrières-en-Brie
77614 Marne-la-Vallée, Cedex 3
Tel. +33-1-64663824
Fax +33-1-64663823
info@fr.schunk.com
www.fr.schunk.com



Great Britain, Ireland

SCHUNK Intec Ltd.
Cromwell Business Centre
10 Howard Way
Interchange Park
Newport Pagnell MK16 9QS
Tel. +44-1908-611127
Fax +44-1908-615525
info@gb.schunk.com
www.gb.schunk.com



Hungary

SCHUNK Intec Kft.
Széchenyi út. 70. | 3530 Miskolc
Tel. +36-46-50900-7
Fax +36-46-50900-6
info@hu.schunk.com
www.hu.schunk.com



India

SCHUNK Intec India Private Ltd.
80 B, Yeshwanthpur, Industrial Suburbs
Bangalore 560022
Tel. +91-80-40538999
Fax +91-80-40538998
info@in.schunk.com
www.in.schunk.com



Italy

SCHUNK Intec S.r.l.
Via Barozzo | 22075 Lurate Caccivio (CO)
Tel. +39-031-4951311
Fax +39-031-4951301
info@it.schunk.com
www.it.schunk.com



Japan

SCHUNK Intec K.K.
45-28 3-Chome Sanno
Ohta-Ku Tokyo 143-0023
Tel. +81-3-37743731
Fax +81-3-37766500
info@jp.schunk.com
www.jp.schunk.com



Mexico

SCHUNK Intec S.A. de C.V.
Calle Pirineos # 513 Nave 6
Zona Industrial Benito Juárez
Querétaro, Qro. 76120
Tel. +52-442-211-7800
Fax +52-442-211-7829
info@mx.schunk.com
www.mx.schunk.com



Netherlands

SCHUNK Intec B.V.
Speldenmakerstraat 3d
5232 BH 's-Hertogenbosch
Tel. +31-73-6441779
Fax +31-73-6448025
info@nl.schunk.com
www.nl.schunk.com



Norway

SCHUNK Intec AS
Hvervenmoveien 45 | 3511 Hønefoss
Tel. +47-210-33106
Fax +47-210-33107
info@no.schunk.com
www.no.schunk.com



Poland

SCHUNK Intec Sp. z o.o.
ul. Puławska 40A
05-500 Piaseczno
Tel. +48-22-7262500
Fax +48-22-7262525
info@pl.schunk.com
www.pl.schunk.com



Russia

SCHUNK Intec 000
ul. Samojlovoy, 5, lit. C
St. Petersburg 192102
Tel. +7-812-326-78-35
Fax +7-812-326-78-38
info@ru.schunk.com
www.ru.schunk.com



Singapore

SCHUNK Intec Pte. Ltd.
25 International Business Park
#03-51/52 German Centre
Singapore 609916
Tel. +65-6240-6851
Fax +65-6240-6852
info@sg.schunk.com
www.sg.schunk.com



Slovakia

SCHUNK Intec s.r.o.
Levická 7 | SK-949 01 Nitra
Tel. +421-37-3260610
Fax +421-37-3260699
info@sk.schunk.com
www.sk.schunk.com



South Korea

SCHUNK Intec Korea Ltd
#1207 ACE HIGH-END Tower 11th,
883 Gwangyang-dong | Dongan-gu,
Anyang-si, Gyeonggi-do 431-804 | Korea
Tel. +82-31-382-6141
Fax +82-31-3826142
info@kr.schunk.com
www.kr.schunk.com



Spain, Portugal

SCHUNK Intec S.L.U.
Foneria, 27 | 08304 Mataró (Barcelona)
Tel. +34-937 556 020
Fax +34-937 908 692
info@es.schunk.com
www.es.schunk.com



Sweden

SCHUNK Intec AB
Morabergsvägen 28
152 42 Södertälje
Tel. +46-8 554 421 00
Fax +46-8 554 421 01
info@se.schunk.com
www.se.schunk.com



Switzerland, Liechtenstein

SCHUNK Intec AG
Im Ifang 12 | 8307 Effretikon
Tel. +41-52-35431-31
Fax +41-52-35431-30
info@ch.schunk.com
www.ch.schunk.com



Turkey

SCHUNK Intec Bağlama Sistemleri ve
Otomasyon San. ve Tic. Ltd. Şti.
Küçükyalı İş Merkezi, Girne Mahallesi
Irmak Sokak, A Blok, No: 9
34852 Maltepe | İstanbul
Tel. +90-216-366-2211
Fax +90-216-366-2277
info@tr.schunk.com
www.tr.schunk.com



USA

SCHUNK Intec Inc.
211 Kitty Hawk Drive
Morrisville, NC 27560
Tel. +1-919-572-2705
Fax +1-919-572-2818
info@us.schunk.com
www.us.schunk.com



Australia
Romheld Automation PTY. LTD.
Unit 30 | 115 Woodpark Road
Smithfield NSW 2164
Tel. +61-2-97211799
Fax +61-2-97211766
sales@romheld.com.au
www.romheld.com.au



Chile
Comercial Araneda y CIA. LTDA.
Quinta Normal
Vargas Fontecilla # 4550 | Santiago
Tel. +56-2-7248123
Fax +56-2-7102036
caraneda@rotar.cl | www.rotar.cl



Colombia
Cav -
Control y Automatización Virtual Ltda.
43 Oficina 101 Avenida Esperanza N. 728
Bogotá D.C.
Tel. +57-1-6608719
Fax +57-1-4109846
info@cavingenieros.com
www.cavingenieros.com

MIKRA CAD CAM CAE, LTDA
AC-3 # 310-87, Bogotá
Tel. +571-201-6319



Costa Rica
RECTIFICACION ALAJUELENSE, S.A.
100m al Oeste y 75m al Sur del
Cementerio Central de Alajuela, Alajuela
Tel. +506-2430-5111



Croatia
Bibus Zagreb d.o.o.
Anina 91 | 10000 Zagreb
Tel. +385-138-18004
Fax +385-138-18005
info@bibus.hr | www.bibus.hr

Okret d.o.o.
Majurina 16 | 21215 Kastel Luksic
Tel. +385-21-228449
Fax +385-21-228464
okret@okret.hr



Ecuador
ELIMED CIA. LTDA.
Calle El Progreso 0E1-111 y Manglaralto
Quito
Tel. +59-39-7784740



Estonia
DV-Tools OÜ
Peterburi tee 34/4 | 11415, Tallinn
Mobile Phone +372-56-655954
Fax +372-6030508
info@dv-tools.ee



Greece
Georg Gousoulis Co. O.E.
27, Riga Fereou Str.
14452 Metamorfosi-Athens
Tel. +30-210-2846771
Fax +30-210-2824568
mail@gousoulis.gr | www.gousoulis.gr



Iceland
Formula 1 ehf
Bredamörk 25 | P.O. Box 1 61
810 Hveragerdi
Tel. +354-5172200 | Fax +354-5172201
formula1@formula1.is



Indonesia
PT. Metaltech Indonesia
Komplek Puri Niaga 1 Blok K7/1T
Puri Kencana | Jakarta Barat
Tel. +62-21-58350434
Fax +62-21-5918553
info@metaltechindonesia.com



Iran
Iran Int. Procurement of Industries Co.
(I.I.P.I.)
No. 10, First alley, Golshan St.,
Khoramshahr Ave. | Tehran, 1554814771
Tel. +98-21-88750965
Fax +98-21-88750966
info@iilpico.com



Israel
Ilan and Gavish Automation Service Ltd.
26, Shenkar St. | Qiryat-Arie 49513
P.O. Box 10118 | Petach-Tikva 49001
Tel. +972-3-9221824
Fax +972-3-9240761
nava@ilan-gavish.com
www.ilan-gavish.co.il

M. K. Sales
Arimon 44 St. | Mosave Gealya 76885
Tel. +972-52-828391
Fax +972-8-9366026
moti@mk-sales.com
www.mk-sales.com



Latvia
Sia Instro
Lacplesa 87 | Riga, 1011
Tel. +371-67-28546
Fax +371-67-28787
maris@instro.lv | www.instro.lv



Malaysia
Precisetech Sdn. Bhd
Plant 1, 15 Lorong Perusahaan Maju 11
13600 Peral | Prai Penang
Tel. +604-5080288
Fax +604-5080988
sales@precisetech.com.my
www.precisetech.com.my

SK-TEC
Automation & Engineering Sdn. Bhd
No. 54-A, Jalan PU7/3,
Taman Puchong Utama
47100 Puchong
Selangor Darul Ehsan
Tel. +603-8060-8771
Fax +603-8060-8772
jeffery.koo@sk-tec.com.my
www.sk-tec.com.my



Peru
ANDES TECHNOLOGY S.A.C.
Avenida Flora Tristan 765
Lima
Tel. +51-1-3487611

MAQUINAS CNC, S.A.C.
Los Jazmines #143, Lima
Tel. +51-1-2750649



Philippines
Bon Industrial Sales
35 Macopa St. | Sta. Mesa Heights
Quezon City
Tel. +63-2-7342740
Fax +63-2-7124771
bonind@skyinet.net



Romania
S.C. Inmaacro S.R.L.
Industrial Machines and Accessories Romania
Avram Iancu Nr. 86
505600 Sacele-Brasov
Tel. +40-368-443500
Fax +40-368-443501
info@inmaacro.com
www.inmaacro.com



Saudi Arabia
Alruqee Machine Tools Co. Ltd.
Head Office
P.O. Box 36 57 | Alkhobar 31952
Tel. +966-3-8470449
Fax +966-3-8474992
mailbox2@alruqee.com
www.alruqee.net



Singapore
BALLUFF ASIA PTE LTD
18 Sin Ming Lane
#06-41 Midview City
Singapore 573960
Tel. +65-625-24384
Fax +65-625-29060
balluff@balluff.com.sg
www.balluff.com.sg

Eureka Tools Pte Ltd.
194 Pandan Loop, # 04-10 Pantech,
Industrial Complex | Singapore 128383
Tel. +65-687-45781
Fax +65-687-45782
eureka@eureka.com.sg
www.eureka.com.sg



Slovenia
MB-Naklo Trgovsko Podjetje D.O.O.
Toma Zupana 16 | 04202 Naklo
Tel. +386-42-771700
Fax +386-42-771717
mb-naklo@mb-naklo.si
www.mb-naklo.si



South Africa
AGM Maschinenbau Pty. Ltd.
42 Sonnenblom Road, East Village
Sunward Park 1659, Boksburg
Tel. +27-11-913-2525
Fax +27-11-913-2994
alfred@agm-machinery.com
www.agm-maschinenbau.co.za



South Korea
Mapal Hiteco Co., Ltd.
1NA-502, Shihwa Ind. Complex 1254-10,
Jungwang-dong, Shihung-city
Kyunggi-do, 429-450
Tel. +82-1661-0091
Fax +82-31-3190-861
hiteco@kornet.net | www.hiteco.co.kr



Taiwan
Accudyna Engineering Co., Ltd.
2 F, No. 885, Youn-Chun East 1st. Rd
40877 Taichung City
Tel. +886-4-23801788
Fax +886-4-23805511
sales@accudyna.com.tw
www.accudyna.com.tw

Yonchin Enterprises, Inc.
5F, No. 100, Hsing Der Rd.
San Chung City 241, Taiwan
Tel. +886-2-2278-9330
Fax +886-2-2278-9320
yon.chin@msa.hinet.net
www.yonchin.com



Thailand
Brainworks Co., Ltd.
18/6, Soi Ram-Intra 65, Tha-Rang
Bangkhen, Bangkok 10220
Tel. +66-2-5105908
Fax +66-2-5105903
chatchai@brainworks.co.th
www.brainworks.co.th



Ukraine
Center of Technical Support „Mem“ LLC
Malysheva str., 11/25
Dnipropetrovsk 49026
Tel. | Fax. +38-056-378-4905
maxim.bayer@gmail.com
www.ctp-mem.com.ua