


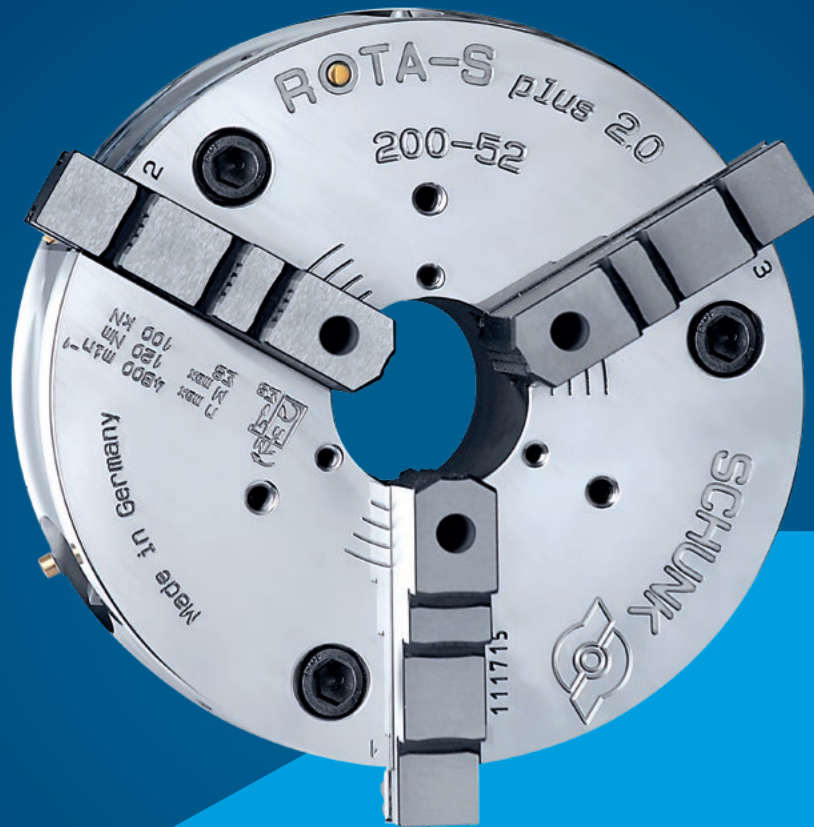

ROTA-S *plus* 2.0

**Jaw quick-change chuck with
angled serrated base jaw
interface**

Versatile useable manual lathe chuck with jaw quick-change system for jaw change in 60 seconds.

The ROTA-S plus 2.0 manual lathe chuck is specifically designed for storage solutions and conventional lathes without hydraulic or pneumatic cylinders. The jaw quick-change system makes the chucks suitable for flexible production starting from batch size 1. There is no need to rebores the jaws on the chuck. The angled jaw interface makes the manual lathe chucks compatible with the predecessor ROTA-S ROTA-S plus as well as the "F" system (Forkardt).



Advantages – Your benefits


- + Convenient jaw quick-change system**
Minimizing set-up times and costs
- + Large through-hole**
Machining all standard pipe diameters
- + High efficiency of the wedge bar system**
Process-reliable clamping due to high clamping forces
- + High jaw quick-change repeat accuracy**
No reboring of already machined jaws necessary
- + Visual safety devices**
Maximum operating safety
- + Optimized lubrication system**
Consistently high clamping forces ensured
- + Modular center sleeve system**
Optimal adjustment to new clamping tasks thanks to the exchangeable center sleeves
- + Excellent clamping force/torque ratio**
Perfect use of the machine performance
- + Angled serrated base jaws SFG**
Compatible with the ROTA-S plus and "F" system (Forkardt)
- + Ergonomic, light safety spanner wrench**
Ensures easy operation
- + All sides of the functional parts are hardened and ground**
High run-out and jaw change repeat accuracy

Technical data

Description	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Through-hole [mm]
ROTA-S plus 2.0 160-42	5400	65	80	6.5	42
ROTA-S plus 2.0 200-52	4800	100	120	7	52
ROTA-S plus 2.0 250-62	4200	160	210	7.7	62
ROTA-S plus 2.0 315-92	3400	180	220	9.8	92
ROTA-S plus 400-102	2200	230	280	12	102
ROTA-S plus 500-162	1500	270	320	12	162
ROTA-S plus 630-252	1000	270	350	15	252
ROTA-S plus 800-252	1000	270	350	15	252
ROTA-S plus 1000-402	900	270	350	15	402

Function ROTA-S plus 2.0

The tangentially movable wedge bars in the chuck are driven by turning the thread spindle. The wedge bars transmit the force to the base jaws, generating a jaw movement that is synchronous and radial to the axis of rotation.

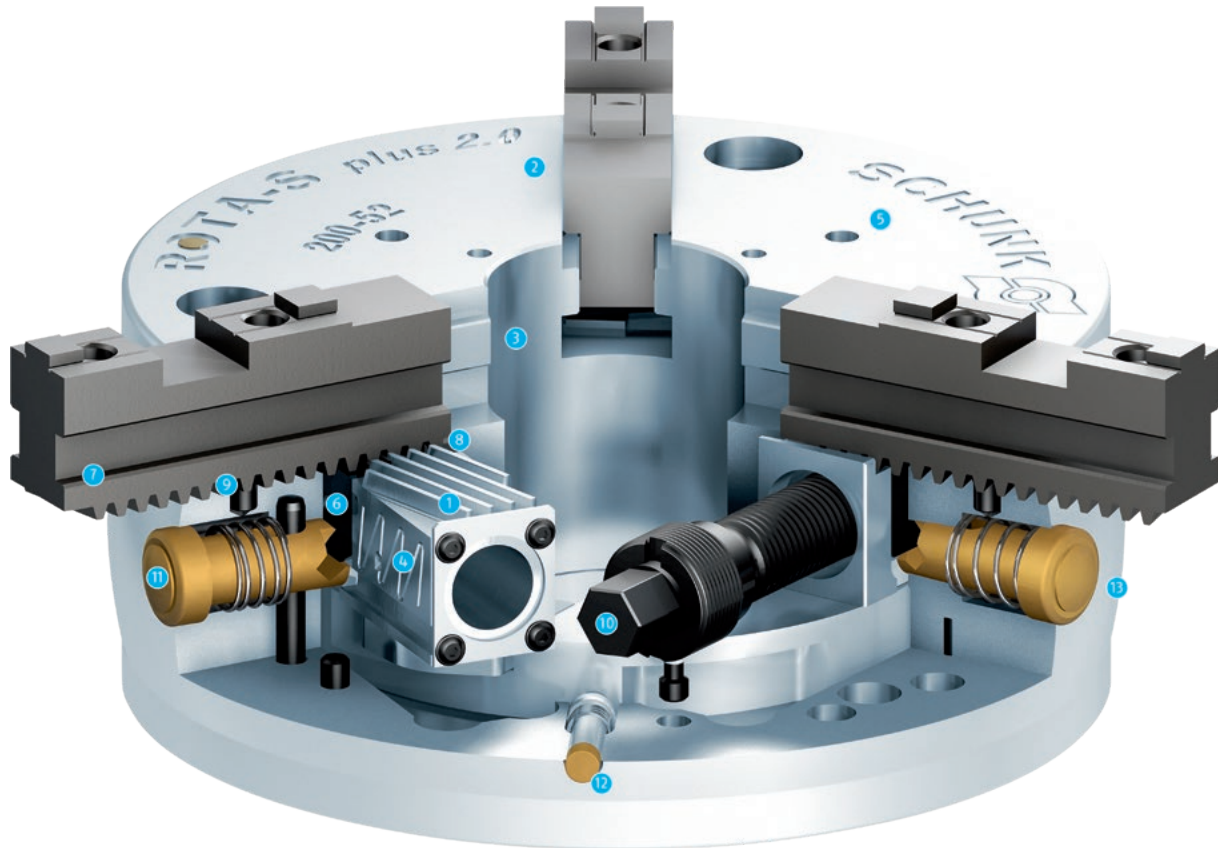

- | | |
|---|--|
| <p>1 Wedge bar actuation system
It offers high run-out accuracies even at high speeds</p> <p>2 Hardened and extremely rigid base body
Therefore a longer service life at highest precision.
Even with maximum clamping force</p> <p>3 Large through-hole
For machining all conventional bar diameters (optionally: with enlarged through-hole)</p> <p>4 Optimized lubrication system
For a high level of efficiency</p> <p>5 Mounting thread
For workpiece stops or cover plates</p> <p>6 Jaw quick-change system
Shortest set-up times due to individual unlocking of jaws</p> <p>7 Base jaws with diagonal serration (SFG)
Compatible with the ROTA-S plus and "F" system (Forkardt)</p> | <p>8 Locking mechanism
Ensures secure intermeshing of the base jaw serration with the wedge bar serration</p> <p>9 Plunger pin
For pre-positioning the base jaw</p> <p>10 Actuation via hexagon connection
This ensures easy operation</p> <p>11 Push button for jaw change
For shortest set-up times</p> <p>12 Indicator pin
For visual stroke monitoring of the manual lathe chuck</p> <p>13 Special shaping with "edge profile for coolant run-off"
Therefore less coolant is in the spindle bearing or machine spindle</p> |
|---|--|


Spindel with hexagon connection

The vise can be easily actuated via a standard hexagon connection using either conventional socket wrenches, extensions or torque wrenches.




Wedge bar system with wiper

Wipers at the end of the wedge bars prevent dirt and fine chips from penetrating into the lathe chuck and the chuck mechanism.

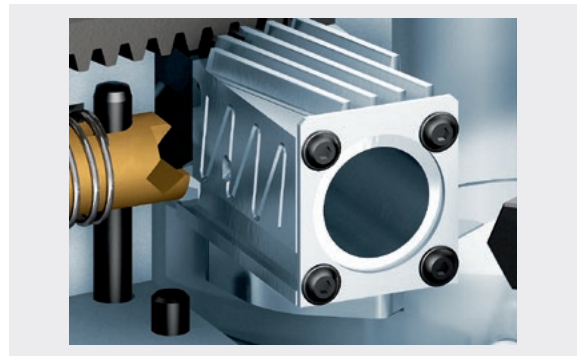

Central lubrication system


Two lubrication nipples positioned on the chuck body facilitate lubrication of all functional surfaces. The special shape of the grease grooves ensures constant lubrication of the friction surfaces. This improves the clamping behavior during operation.

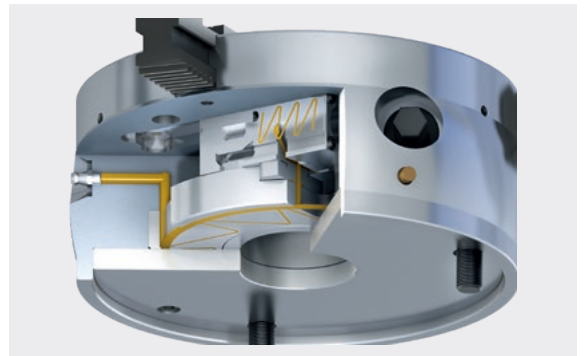

Maximum operating safety

To ensure safe working, an indicator pin shows when the chuck mechanism is close to the stroke end position. As soon as the indicator pin moves outwards, the workpiece is no longer clamped correctly and machining must not be started.


1 Indicator pin

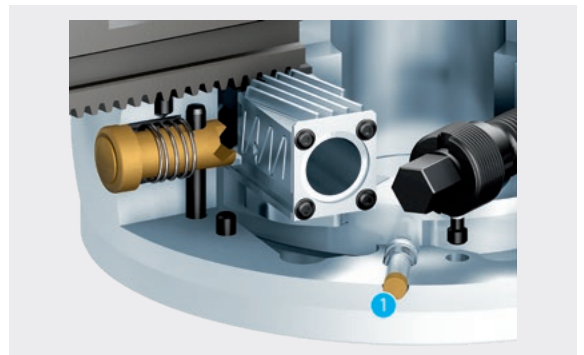

Correct jaw change

When the base jaw is fully inserted into the guideway, the slide positions the base jaw serration for the wedge bar. The base jaw holds the locking slide in the release position. The chuck can now be actuated.


- ① Push button
- ② Slide
- ③ Traverse slide
- ④ Locking slide
- ⑤ Base jaw

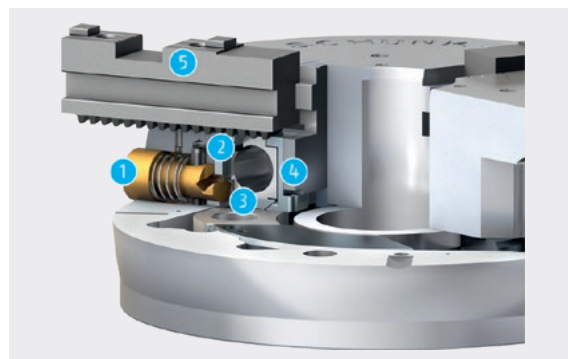


Incorrect jaw change

If the base jaw is not fully inserted into the guideway, the locking slide prevents the chuck being clamped.

- ① Push button
- ② Slide
- ③ Traverse slide
- ④ Locking slide
- ⑤ Base jaw

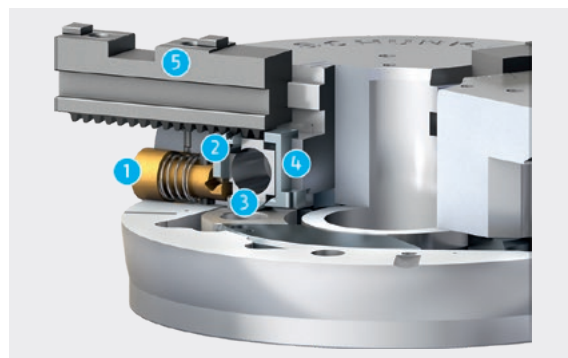

Modular center sleeve system

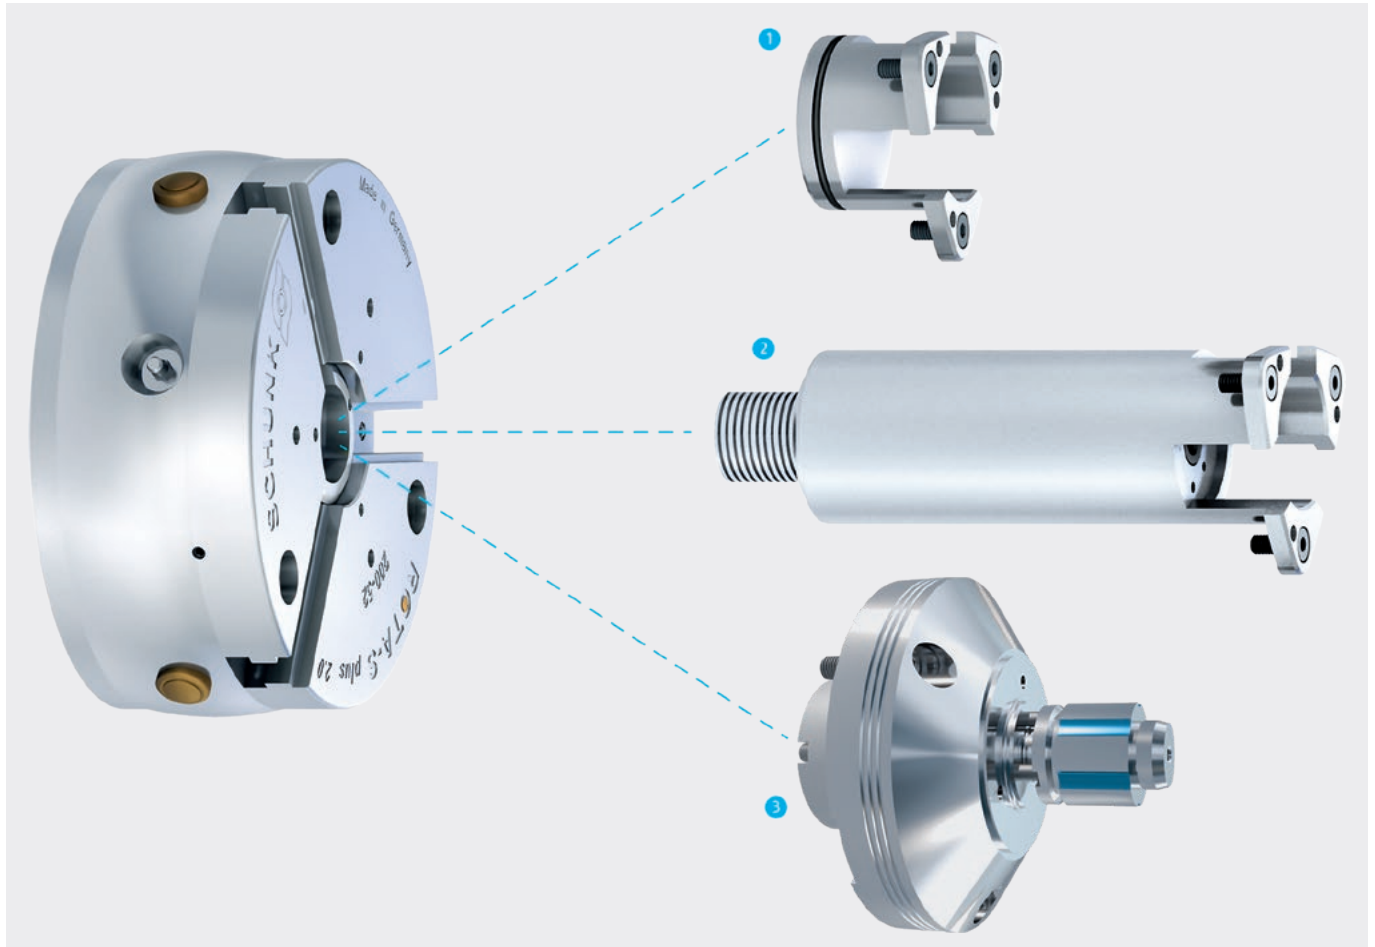

The modular center sleeve system increases flexibility for the most various applications in everyday life.

1 Closed center sleeve

The closed center sleeve prevents penetration of chips and coolant into the through-hole.


2 Adjustable stop in the center sleeve

The adjustable stop ensures that all workpieces are stopped with high repeat accuracy in the same selectable position. This makes handling quick and easy.


3 Expansion arbor

To clamp small inner clamping diameters, the ROTA-S plus 2.0 in sizes $\varnothing$ 200 mm and $\varnothing$ 250 mm can be retrofitted with an expansion arbor. However, a taper must be ground into the chuck body in order to do this.


① Modular center sleeve system up to size 315 possible.

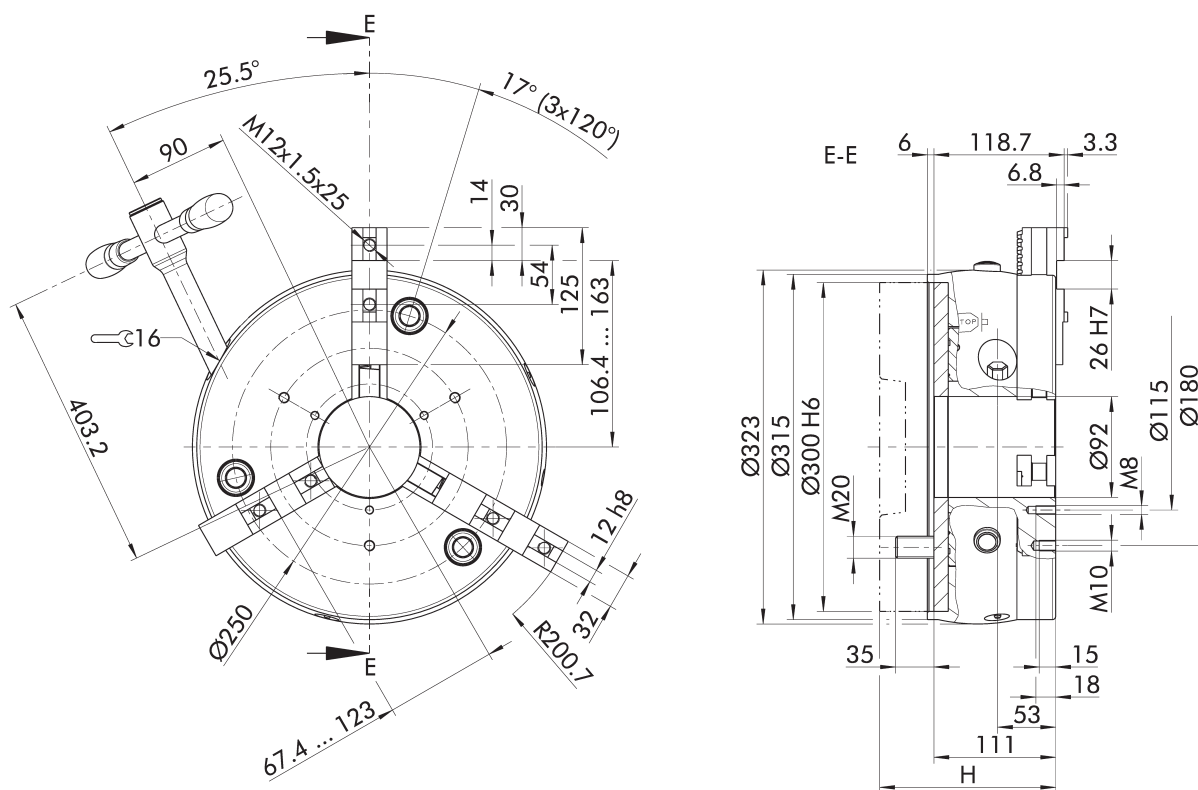


ISO 702-3



ISO 702-2



ISO 702-1



Chuck for shaft clamping drawn in open position.
Subject to technical changes.

- ① For short taper bayonet mount ISO 702-3 (similar DIN 55027)
- ② For short taper camlock mount ISO 702-2 (similar DIN 55029)

- ③ With intermediate flange for short taper ISO 702-1 (similar DIN 55026)

Technical data

Spindle type	Spindle size	Standard [ID]	Special Offer Package 1 [ID]	Special Offer Package 2 [ID]	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Height H [mm]	Weight [kg]
-	Z300	0819004	0819204	0819104	3400	180	220		54.2
ISO 702-3	Nr. 6	0819014	0819214	0819114	3400	180	220	128	62.1
ISO 702-3	Nr. 8	0819024	0819224	0819124	3400	180	220	130	62.6
ISO 702-3	Nr. 11	0819034	0819234	0819134	3400	180	220	133	63.3
ISO 702-2	Nr. 6	0819044	0819244	0819144	3400	180	220	133	64.7
ISO 702-2	Nr. 8	0819054	0819254	0819154	3400	180	220	138	66.7
ISO 702-2	Nr. 11	0819064	0819264	0819164	3400	180	220	143	67.5
ISO 702-1	Nr. 6	0819074	0819274	0819174	3400	180	220	136	65.6
ISO 702-1	Nr. 8	0819084	0819284	0819184	3400	180	220	136	64.8
ISO 702-1	Nr. 11	0819094	0819294	0819194	3400	180	220	146	67.6

Scope of delivery – Standard version

Chuck, 1 set of base jaws with screws, chuck mounting screws, actuation key, eye bolt and operating manual

Scope of delivery – Special offer package 1

Chuck, 1 set of stepped block jaws with screws (ground on the chuck), chuck mounting screws, actuation key, eye bolt, and operating manual

Scope of delivery – Special offer package 2

Chuck, 1 set of base jaws with screws, 1 set of hard top jaws (ground on the chuck), chuck mounting screws, actuation key, eye bolt, and operating manual

Note


Enlargement of the through-hole

Enlargement of the through-hole to a maximum $\varnothing 102$ mm available upon request.

Further technical data

Chuck type	Through-hole [mm]	Stroke/jaw [mm]	Tooth pitch [mm]	Center jaw height [mm]
ROTA-S plus 2.0 315-92	92	9.8	7	74

Clamping force-RPM-diagram

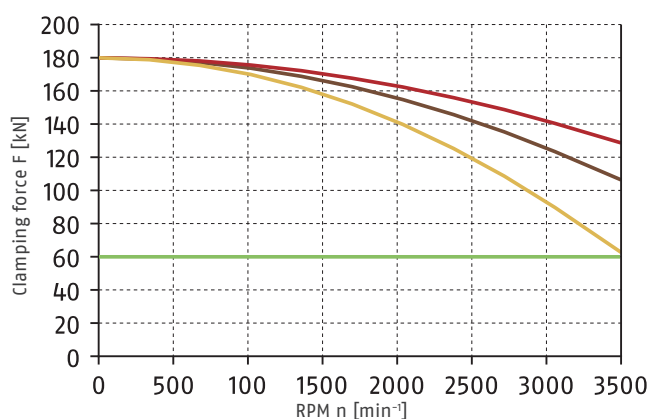


Required minimum
clamping force F_{spmin} 33%


SHF 315
3.3 kg

STF 315
5.5 kg

SFA 315
5.6 kg




Load of base jaw guidance

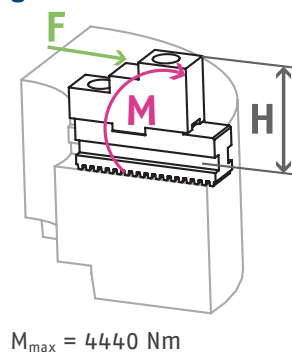

Center sleeves


Center sleeve closed

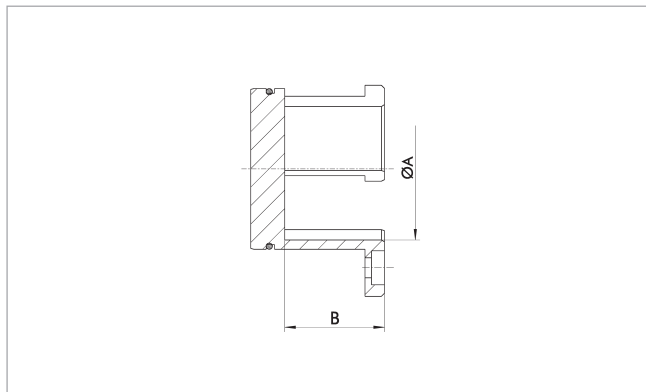

Technical data

Description	ID	Suitable for	ØA [mm]	B [mm]	Weight [kg]
SBS-G-S 315	8704848	ROTA-S plus 2.0 315-92	86	43.5	0.8

Center sleeve with adjustable stop

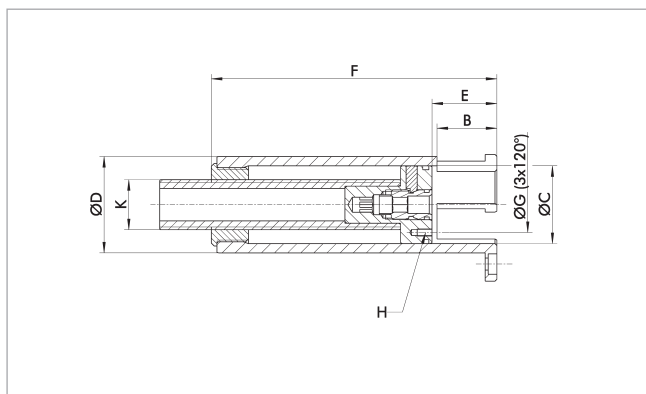


Technical data


Description	ID	Suitable for	B [mm]	ØC [mm]	ØD [mm]	E [mm]	F [mm]	ØG [mm]	H	K	Weight [kg]
SBS-T-S 315	8704856	ROTA-S plus 2.0 315-92	44	75	92	44 - 68	147	50	M6x12	M27	4.1

- Important: Check the spindle/draw tube through-hole
- The spindle through-hole must be at least Ø D + 0.5 mm


Base jaws, Hard stepped block jaws, Soft monoblock jaws with angled serration




SMB
Soft monoblock jaws




STF
Hard stepped block jaws



SFG
Base jaws



STB
Base jaws



STN
Base jaws


Technical data

Chuck type	Description	ID	N [mm]	S [mm]	B [mm]	B1 [mm]	H [mm]	H1 [mm]	L [mm]	T [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA-S plus 2.0 315-92	SMB 315	0163103			32		81	46	140					7.5
ROTA-S plus 2.0 315-92	SMB-H 315	0163203			32		135	100	140					13.0
ROTA-S plus 2.0 315-92	SFG 315	0157103	26	12	32		46	43	125			54	M12x1.5	3.1
ROTA-S plus 2.0 315-92	SFGL 315	0157123	26	12	32		46	43	160			54	M12x1.5	4.0
ROTA-S plus 2.0 315-92	SFG-V 315	0157153	26	12	32		46	43	125			54	M12x1.5	3.1
ROTA-S plus 2.0 315-92	STB 315-2	0156103	21		54	32	75		125				M16	9.3
ROTA-S plus 2.0 315-92	STN 315-4	0160503		21	45	32	57.5	55	110		13	28	M16	4.5
ROTA-S plus 2.0 315-92	STF 315	0161103			32		81	46	129.1	15				5.5


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Soft top jaws

with tongue and groove



SFA-AL
Soft top jaws



SFA
Soft top jaws


Technical data

Chuck type	Description	ID	N [mm]	S [mm]	B [mm]	H [mm]	H2 [mm]	L [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA-S plus 2.0 315-92	SFA 315	0153103	12	26	35	60	54	145	60	54	M12	5.6
ROTA-S plus 2.0 315-92	SFA-AL 315	0172104	12	26	40	60	54	145	60	54	M12	2.4
ROTA-S plus 2.0 315-92	SFA 315-C1	0154108	12	26	40	60	54	110	40	54	M12	4.9
ROTA-S plus 2.0 315-92	SFA 315-C2	0154109	12	26	40	60	54	145	75	54	M12	6.6
ROTA-S plus 2.0 315-92	SFA 315-C3	0154110	12	26	40	100	94	145	75	54	M12	11.4
ROTA-S plus 2.0 315-92	SFA 315-C4	0154111	12	26	40	120	114	145	75	54	M12	13.8
ROTA-S plus 2.0 315-92	SFA 315-C5	0154112	12	26	40	150	144	145	75	54	M12	17.5
ROTA-S plus 2.0 315-92	SFA 315-C51	0154123	12	26	50	80	74	145	75	54	M12	11.4
ROTA-S plus 2.0 315-92	SFA 315-C6	0154113	12	26	60	60	54	110	40	54	M12	7.6
ROTA-S plus 2.0 315-92	SFA 315-C7	0154114	12	26	80	60	54	110	40	54	M12	10.3
ROTA-S plus 2.0 315-92	SFA 315-C8	0154115	12	26	80	80	74	110	40	54	M12	14.0


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws, Full grip jaws


with tongue and groove



SFA-SM
Full grip jaws



SFA-SA
Full grip jaws



SHF
Hard stepped top jaws


Technical data

Chuck type	Description	ID	N [mm]	S [mm]	B [mm]	B1 [mm]	H [mm]	H1 [mm]	H2 [mm]	L [mm]	T [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA-S plus 2.0 315-92	SFA-SA 315	0174103	12	26	240	45	75	69	60	117		49.75	54	M12	8.0
ROTA-S plus 2.0 315-92	SFA-SM 315	0173103	12	26	240	45	75	69	60	110		41	54	M12	29.2
ROTA-S plus 2.0 315-92	SHF 315	0155103	12	26	36		62	56		105	15	22.3	54	M12	3.3


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Claw jaws

with tongue and groove



SZKA
Claw jaws



Position of base jaws


Technical data

Chuck type	Clamping range ØD	Swing diameter SDmax	Position of base jaws	Description	ID	N	S	B	H	H1	L	T	G	b	Screws	m/SET
	[mm]	[mm]				[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[kg]
ROTA-S plus 2.0 315-92	83 - 197	389	I	SZKA 321	0139166	12	26	40	59	53	108	25	M8	54	M12	3.1
ROTA-S plus 2.0 315-92	190 - 305	397	I	SZKA 324	0139169	12	26	40	59	53	90	25	M8	54	M12	2.8
ROTA-S plus 2.0 315-92	43 - 118	386	II	SZKA 321	0139166	12	26	40	59	53	108	25	M8	54	M12	3.1
ROTA-S plus 2.0 315-92	118 - 226	386	II	SZKA 324	0139169	12	26	40	59	53	90	25	M8	54	M12	2.8


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws


with tongue and groove




Position of base jaws II



Position of base jaws I



Position of base jaws II



Position of base jaws I

O.D. clamping


Chuck type	Description	ID	A1 [mm]	A3 [mm]	A4 [mm]	A5 [mm]	A7 [mm]	A8 [mm]
ROTA-S plus 2.0 315-92	SHF 315	0155103	14 - 122	98 - 209	207 - 318	91 - 202	26 - 130	135 - 239

I.D. clamping

Chuck type	Description	ID	I1 [mm]	I2 [mm]	I4 [mm]
ROTA-S plus 2.0 315-92	SHF 315	0155103	94 - 201	201 - 310	169 - 281

Hard stepped block jaws

with tongue and groove



Jaw position II

O.D. clamping

Chuck type	Description	ID	A1 [mm]	A2 [mm]	A4 [mm]
ROTA-S plus 2.0 315-92	STF 315	0161103	14 - 122	91 - 210	200 - 319

I.D. clamping

Chuck type	Description	ID	I1 [mm]	I3 [mm]
ROTA-S plus 2.0 315-92	STF 315	0161103	92 - 200	200 - 309

Accessories

Clamping force tester

For measuring the jaw clamping force of 2, 3 and 6-jaw chucks up to 6,000 RPM.



Suitable for	Description	ID
ROTA-S plus 2.0 315-92	IFT Set	1404235

Maintenance kit

Consisting of a grease gun, LINOMAX plus grease cartridge, chip protection, and sealing plug.



Suitable for	Description	ID
ROTA-S plus 2.0 315-92	WTS-S 315	0899017

Torque wrench

Torque wrench for actuation of SCHUNK manual lathe chucks.



Suitable for	Description	ID
ROTA-S plus 2.0 315-92	SSH-D-1/2" 60-300	1301281

Hexagon actuation wrench

Spanner wrench for manual actuation of the SCHUNK manual lathe chucks with hexagonal connections.



Suitable for	Description	ID
ROTA-S plus 2.0 315-92	SSH-SK SW16-230	1330894
ROTA-S plus 2.0 315-92	SSH-SL SW16-330	8704923

Grease

LINOMAX plus

High-performance grease as standard for regularly lubricating SCHUNK manual and power lathe chucks and steady rests.



Bundle	Description	ID
Cartridge	LINOMAX plus cartridge	1342585
Can	LINOMAX plus can	1342586
Bucket	LINOMAX plus bucket	1342587

Consol plate

Standard version for conversion of all ROTA-S plus 2.0 manual lathe chucks for stationary applications. The sizes 400 to 630 are available on request.



Suitable for	Description	ID
ROTA-S plus 2.0 315-92	KSL 315	0814273

Sealing plug

For closing the through-hole on manual lathe chucks ROTA-S plus 2.0, ROTA-S plus and ROTA-G.



Suitable for	Description	ID
ROTA-S plus 2.0 315-92	VST Ø92	8702869

Chip protection

For better protection against the penetration of chips for the manual lathe chucks ROTA-S plus 2.0, ROTA-S plus and ROTA-G.



Suitable for	Description	ID
ROTA-S plus 2.0 315-92	SPS 315	9966641

Grease gun

Auxiliary tools for lubrication of all kinds of SCHUNK products. The grease gun can be used for cartridges of all types of SCHUNK grease.



Bundle	Description	ID
Cartridge	Grease gun	9900543



**H.-D. SCHUNK GmbH & Co.
Spanntechnik KG**

Lothringer Str. 23
D-88512 Mengen
Tel. +49-7572-7614-1300
Fax +49-7572-7614-1039
CMM@de.schunk.com
schunk.com