



ROTA NCF *plus* 2

**Power lathe chuck with
centrifugal force com-
pensation and large
through-hole**

Weight-optimized power lathe chuck with integrated centrifugal force compensation for reducing the loss of clamping force under speed of rotation

High speeds mean high centrifugal forces of the jaws and thus high clamping force losses in turning applications. The ROTA NCF plus 2 with integrated centrifugal force compensation effectively counteracts this loss of clamping force. As a result, significantly higher speeds can be run than with conventional lathe chucks. The modular sealed center sleeve system also increases flexibility.



Advantages – Your benefits


- + Precision wedge-hook power lathe chuck for highest quality requirements**
Allows excellent machining results
- + Very high RPM without essential clamping force reduction**
Optimum utilization of the lathe chuck performance due to high economic efficiency
- + With integrated centrifugal force compensation**
Thereby high machining speeds are possible
- + Large through-hole**
Machining all standard pipe diameters
- + High efficiency of the wedge hook system**
Process-reliable clamping due to high clamping forces
- + Optimized lubrication system**
Consistently high clamping forces ensured
- + Modular center sleeve system**
Optimal adjustment to new clamping tasks thanks to the exchangeable center sleeves
- + Double-guided chuck piston**
For highest run-out and repeat accuracy
- + Low chuck weight**
Fast acceleration and deceleration operations shorten the cycle times
- + All sides of the functional parts are hardened and ground**
Ensures a long service life

Technical data

Description	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. actuating force [kN]	Stroke/jaw [mm]	Piston stroke [mm]	Through-hole [mm]
ROTA NCF plus 2 185-52	6000	72	30	5.3	20	52
ROTA NCF plus 2 215-66	6000	100	42	5.3	20	66
ROTA NCF plus 2 260-86	4500	140	60	5.3	20	86
ROTA NCF plus 2 315-104	4000	160	70	5.3	20	104
ROTA NCF 400-120	3300	187.5	77	8	30	120
ROTA NCF 500-160	2200	200	75	8	30	160
ROTA NCF 630-180	1800	300	122	11.2	42	180

Function of ROTA NCF plus 2

The axially movable piston transfers the force to the base jaw and generates a radial jaw movement synchronized with the rotational axis. The jaws are coupled to a compensating weight via a lever, which leads to a constant clamping force when the lathe chuck rotates.

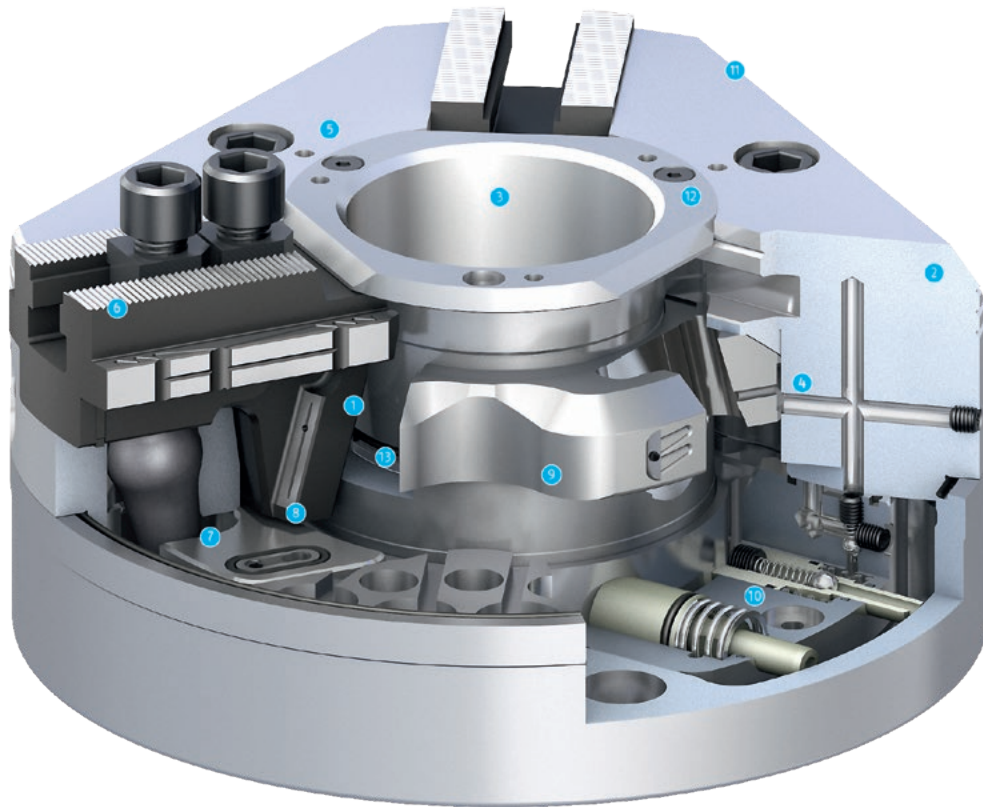


- 1 Wedge hook drive**
Offers constantly high clamping forces in operation
- 2 Hardened and extremely rigid base body**
Therefore a longer service life at highest precision. Even with maximum clamping force
- 3 Large through-hole**
For machining of all standard raw material diameters
- 4 Optimized lubrication system**
For a high level of efficiency
- 5 Mounting thread**
For workpiece stops or cover plates
- 6 Base jaw serration**
Available in inch or metric sizes
- 7 Integrated centrifugal force compensation**
For constant clamping force even at top speeds
- 8 Robust and advanced wedge-hook**
For excellent power transmission
- 9 Innovative piston guidance**
Optimizes the force flow and provides optimal rigidity
- 10 Integrated, patented grease pump system**
For permanent grease circulation during every clamping stroke. Extended maintenance intervals can be realized as a result
- 11 Weight-optimized design**
For great economy in daily use
- 12 Modular center sleeve system**
Therefore optimal adjustment to new clamping tasks
- 13 Additional seals**
For sealing against coolants and chips

Integrated centrifugal force compensation


Compared to conventional lathe chucks, the loss of clamping force is compensated by the integrated centrifugal force compensation. Due to the speed, the centrifugal force balancing weight is pressed to the outside. The lever directly transmits the force onto the base jaw.

- ❶ Centrifugal force via compensation weight
- ❷ Clamping force support for O.D. clamping

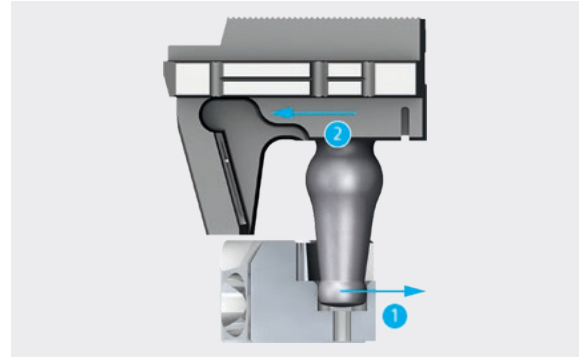

Changing the center sleeve


The modular center sleeves can be changed quickly and easily while the chuck remains mounted. When the three screws are undone, all the protection sleeves can be pulled off from the front and replaced.

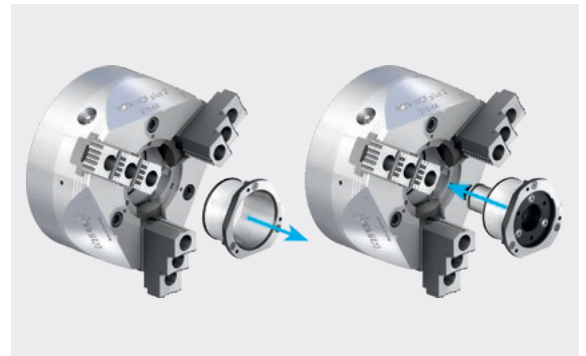

Optimized wedge hook and precision jaw guidance

For longer life time and high repeat accuracy, fine serration 1/16" x 90° or 1.5 mm x 60°.


- ❶ Trapezoidal angle
Between the base jaw and piston
- ❷ Precision flat guidance

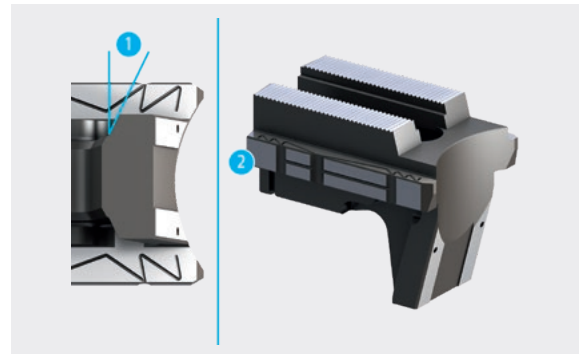

Additional sealing inside of the center sleeve and optimized greasing system


Therefore the maintenance intervals are longer and permanent supply to all function and friction surfaces is ensured.

- ❶ Modular center sleeve
Also exchangeable in built-in condition from the front chuck face
- ❷ Long piston guidance
For more accuracy

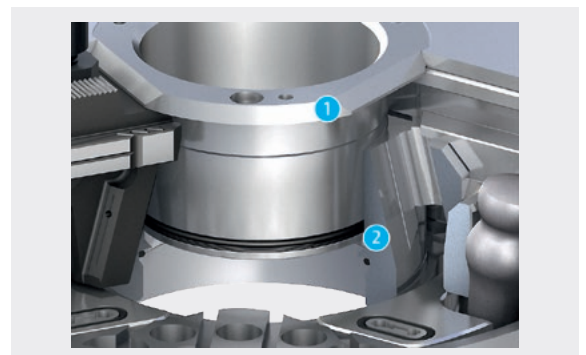

Integrated, patented grease-pump system in the centrifugal force compensation

For permanent grease circulation during every clamping stroke. Extended maintenance intervals can be realized as a result

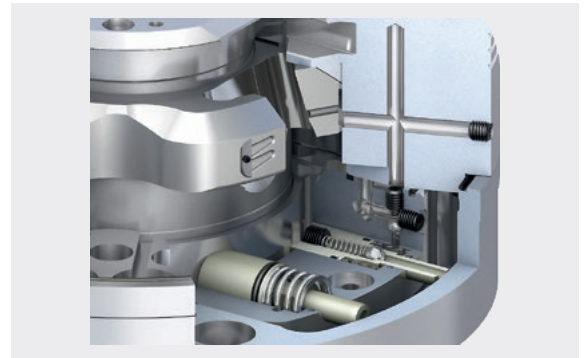


Very rigid and hardened chuck body

With direct short taper mounting without intermediate flange.

- ① Chuck body
- ② Piston



Modular center sleeve system

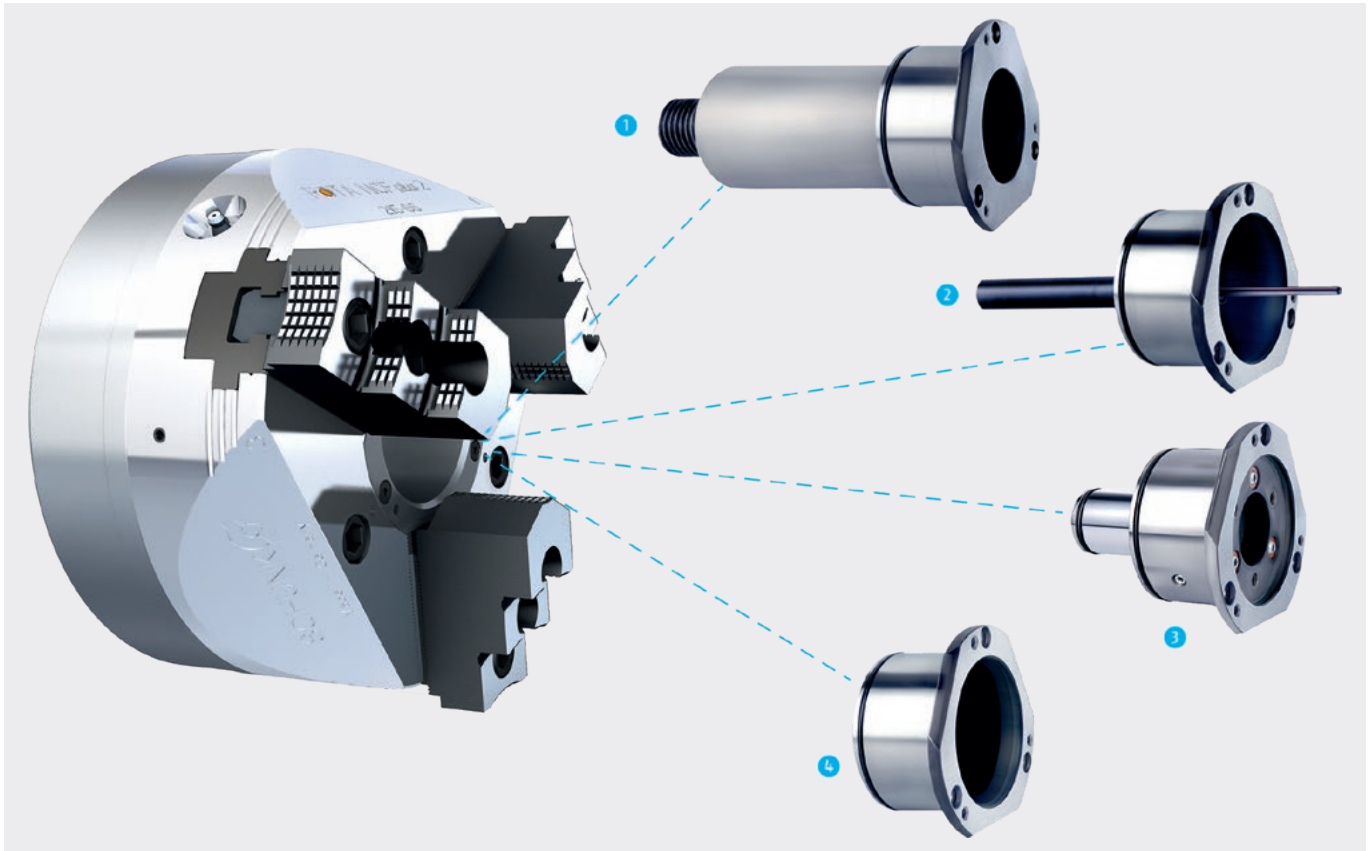

The modular center sleeve system increases flexibility for the most various applications in everyday life.

1 Adjustable stop in the center sleeve

The adjustable stop ensures that all workpieces are stopped with high repeat accuracy in the same selectable position. This makes handling quick and easy.

2 Part ejector in the center sleeve

An optimum addition for automatic loading. The part ejector disposes of a gas spring, which will eject your workpiece safely out of the chuck.


3 Coolant nozzles in the center sleeve

Ideal as an additional component if your machine is equipped with a central coolant supply. For I.D. machining, coolant will be fed directly to the tool.

4 Closed center sleeve

The closed center sleeve prevents penetration of chips and coolant into the through-hole.

① Modular center sleeve system up to size 315 possible.



- 8

Technical data

Spindle type	Spindle size	ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. actuating force [kN]	Moment of inertia [kgm ²]	Weight [kg]
ISO 702-4	Nr. 5 (Z140)	0854106	1/16" x 90°	6000	72	30	0.063	14
ISO 702-1	Nr. 5	0854107	1/16" x 90°	6000	72	30	0.067	15
ISO 702-4	Nr. 5 (Z140)	0854108	1.5 mm x 60°	6000	72	30	0.063	14
ISO 702-1	Nr. 5	0854109	1.5 mm x 60°	6000	72	30	0.067	15


Scope of delivery

Chuck, T-nuts with screws, chuck mounting screws, and operating manual

Further technical data

Chuck type	Through-hole [mm]	Stroke/jaw [mm]	Piston stroke (H) [mm]	Center jaw height [mm]
ROTA NCF plus 2 185-52	52	5.3	20	46

Clamping force-RPM-diagram

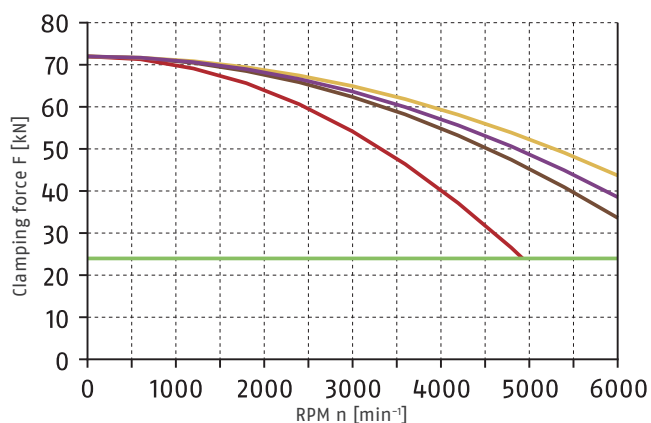

Required minimum clamping force F_{spmin} 33%

SHB 165
1.3 kg



SWB 165
2.5 kg




SHB-J 60
0.8 kg



KM-WB 66
1.4 kg





Load of base jaw guidance



$$M_{max} = 1404 \text{ Nm}$$

Center sleeves



Center sleeve closed

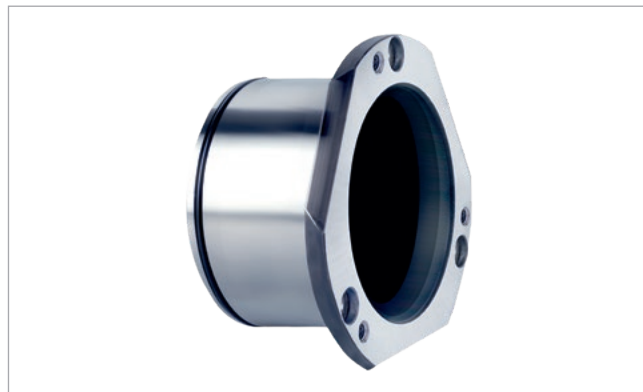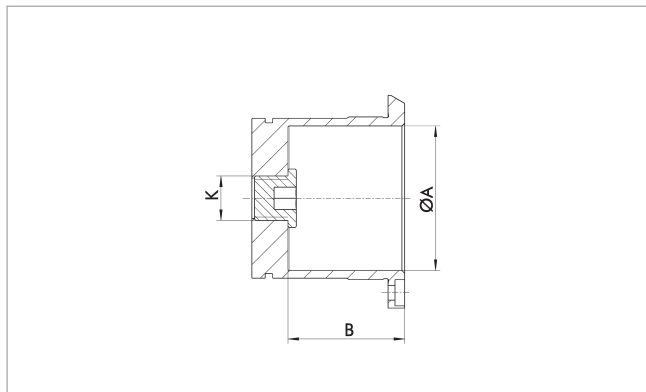

Technical data

Description	ID	Suitable for	ØA [mm]	B [mm]	K	Weight [kg]
SBS-G-C 185	8703865	ROTA NCF plus 2 185-52	52	42	M16x1.5	0.6

Protection sleeve with ejector

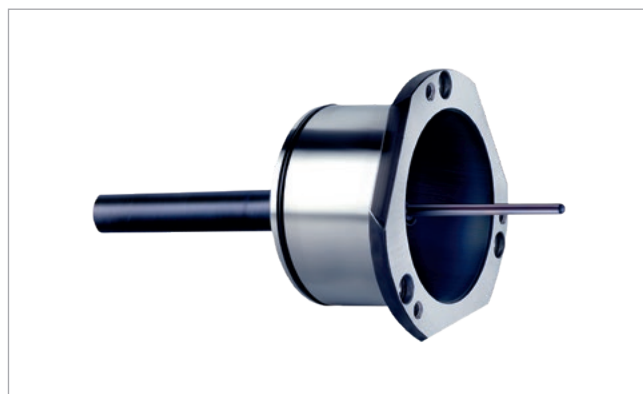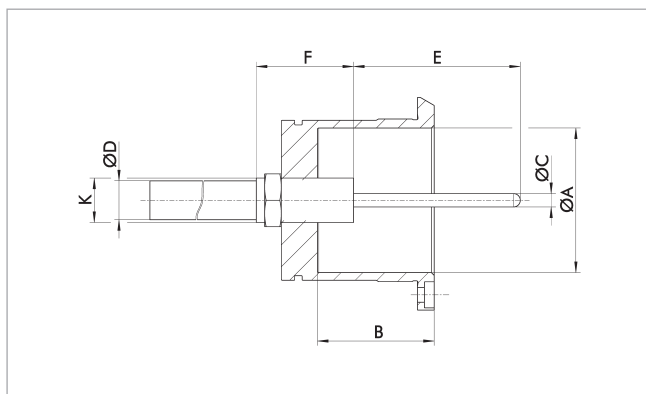


Technical data

Description	Suitable for	ØA [mm]	B [mm]	ØC [mm]	ØD [mm]	E [mm]	F [mm]	K
SBS-A-C 185	ROTA NCF plus 2 185-52	52	42	4.8	14	10 - 100	35	M16x1.5

- Center sleeves with ejector are available on request
- The ejector stroke is selectable in increments of 10 from 10 - 100 mm
- The ejection force is selectable with 40, 100, 150, 200, 250, or 300 N


Protection sleeve with spray nozzles

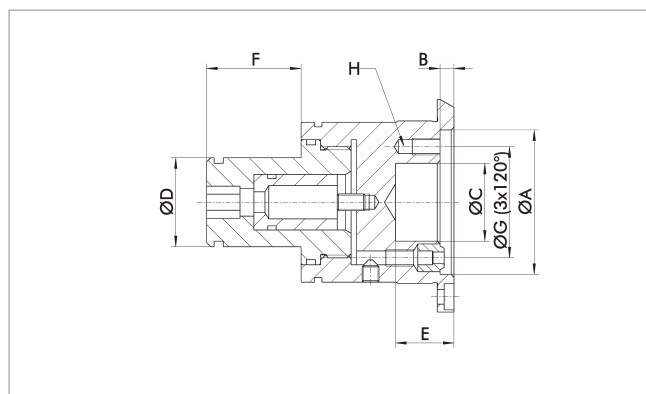

Technical data

Description	ID	Suitable for	ØA [mm]	B [mm]	ØC [mm]	ØD [mm]	F [mm]	ØG [mm]	H	Weight [kg]
SBS-S-C 185	8703863	ROTA NCF plus 2 185-52	52	5	28	32	34	41	M6x10	1.2

Center sleeve with adjustable stop

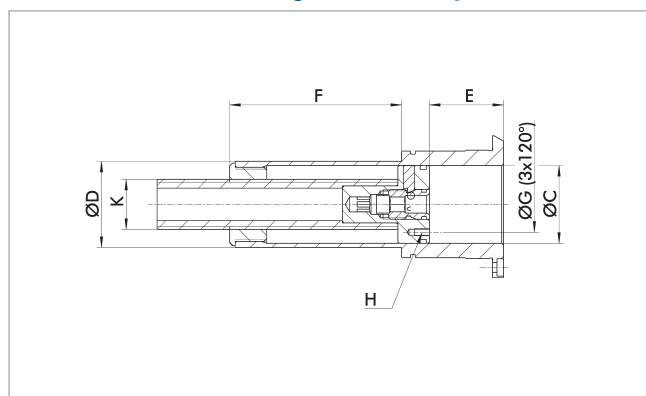


Technical data

Description	ID	Suitable for	ØC [mm]	ØD [mm]	E [mm]	F [mm]	ØG [mm]	H	K	Weight [kg]
SBS-T-C 185	8703859	ROTA NCF plus 2 185-52	42	46.5	0 - 110.8	92.8	30	M4x8	M27	1.5

- Important: Check the spindle/draw tube through-hole
- The spindle through-hole must be at least $\varnothing D + 0.5 \text{ mm}$

Adapter plates

Z-mount on short taper ISO 702-1

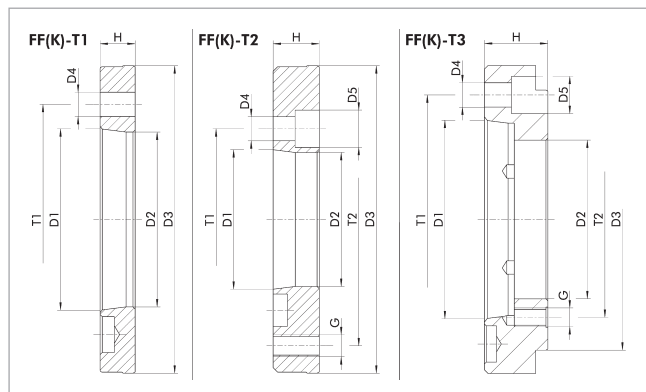

Technical data

Description	Adapter plate type	ID	Suitable for	D1	D2	D3	D4	D5	G	H	T1	T2
					[mm]		[mm]	[mm]		[mm]	[mm]	[mm]
FF-T2 Z140-A4	FF-T2	0805000	ROTA NCF plus 2 185-52	Nr. 4	61	Z140	11 (6x60°)	17	M10 (6x60°)	21	82.6	104.8
FF-T1 Z140-A5	FF-T1	0803000	ROTA NCF plus 2 185-52	Nr. 5	79.6	Z140	11 (6x60°)			16	104.8	
FF-T3 Z140-A6	FF-T3	0801000	ROTA NCF plus 2 185-52	Nr. 6	85	Z140	13 (6 x 60°)	20	M10 (6x60°)	34	133.4	104.8

Direct adapter plates

Direct adapter plates are used if the spindle mounting bolt circle has the same size as the lathe chuck mounting bolt circle. The adapter plate has to be mounted on to the spindle together with the lathe chuck. The adapter plate is preassembled on the lathe chuck.

Reduction adapter plates FF-T2


Reduction adapter plates are used if the mounting bolt circle of the spindle is smaller than the one of the lathe chuck mounting bolt circle. The adapter plate is first mounted on the spindle and then the lathe chuck is mounted on the adapter plate.

Expansion adapter plates FF-T3


Expansion adapter plates are used if the mounting bolt circle of the spindle is larger than the one of the lathe chuck mounting bolt circle. The adapter plate is first mounted on the spindle and then the lathe chuck is mounted on the adapter plate.

Soft top jaws


with fine serration 60°



KM-WB
Soft top jaws



KM-WBAL
Soft top jaws



KM-WBL
Soft top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	H [mm]	L [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA NCF plus 2 185-52	KM-WBL 60	0132600	12	32	32	82	47	20	M10	1.5
ROTA NCF plus 2 185-52	KM-WBL 62	0132606	12	35	60	82	47	20	M10	3.1
ROTA NCF plus 2 185-52	KM-WB 61	0130128	12	35	60	72	37	20	M10	2.9
ROTA NCF plus 2 185-52	KM-WB 66	0132138	12	32	32	72	37	20	M10	1.4
ROTA NCF plus 2 185-52	KM-WBAL 70	0132521	12	35	50	72	37	20	M10	0.9


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws, Full grip jaws


with fine serration 60°



KMWB-SA
Full grip jaws



KMWB-SM
Full grip jaws



SHB-J
Hard stepped top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	B1 [mm]	H [mm]	H2 [mm]	L [mm]	T [mm]	a [mm]	b [mm]	c [mm]	Screws	m/SET [kg]
ROTA NCF plus 2 185-52	KMWB-SA 165	0132800	12	120	32	58	48	59.5		25	20		M10	2.2
ROTA NCF plus 2 185-52	KMWB-SM 165	0132700	12	120	32	50	40	60		24	20		M10	4.9
ROTA NCF plus 2 185-52	SHB-J 60	0133100	12	28		36		67	12	14	20	20	M10	0.8

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

Claw jaws

with fine serration 60°



SZAJ
Claw jaws


Technical data

Chuck type	Clamping range ØD	Swing diameter SDmax	Description	ID	N	B	H	L	T	G	b	Screws	m/SET
	[mm]	[mm]			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]		[kg]
ROTA NCF plus 2 185-52	41 - 77	202	SZAJ 16-6	0176100	12	30	47	71	20	M6	20	M10	1.2
ROTA NCF plus 2 185-52	57 - 93	201	SZAJ 16-7	0176101	12	30	47	62.5	20	M6	20	M10	1.0
ROTA NCF plus 2 185-52	73 - 110	201	SZAJ 16-8	0176102	12	30	47	54	20	M6	20	M10	1.1
ROTA NCF plus 2 185-52	87 - 123	202	SZAJ 16-9	0176103	12	30	47	52.5	20	M6	20	M10	1.1
ROTA NCF plus 2 185-52	103 - 139	203	SZAJ 16-10	0176104	12	40	47	52.5	20	M6	20	M10	1.2

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

T-nut

with fine serration 60°




NJ
T-nut

Chuck type	Description	ID	N	B	H	H1	L	b	Cyl.-screw	Max. adm. tightening torque
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[Nm]
ROTA NCF plus 2 185-52	NJ 62	0146133	12	17.3	18.5	7.5	35.7	20	M10 x 25	50

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws

with fine serration 60°

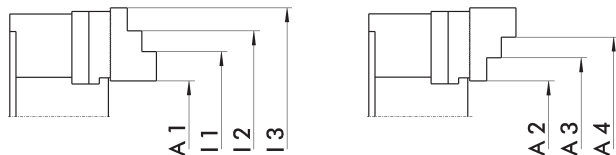

Jaw position I

Jaw position II

O.D. clamping


Chuck type	Description	ID	A1 [mm]	A2 [mm]	A3 [mm]
ROTA NCF plus 2 185-52	SHB-J 60	0133100	27 - 107	28 - 110	107 - 185

I.D. clamping


Chuck type	Description	ID	I1 [mm]	I2 [mm]
ROTA NCF plus 2 185-52	SHB-J 60	0133100	85 - 165	160 - 225

Soft top jaws


with fine serration 90°



SWB
Soft top jaws



SWB-AL
Soft top jaws



SWBL
Soft top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	H [mm]	L [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA NCF plus 2 185-52	SWBL 165	0120152	14	35	40	80	45	20	M10	2.1
ROTA NCF plus 2 185-52	SWB 165	0120101	14	35	60	68	33	20	M10	2.5
ROTA NCF plus 2 185-52	SWB-FF 160	0120302	14	35	40	72	36	21	M12	1.8
ROTA NCF plus 2 185-52	SWB-AL 165	0168105	14	35	60	80	45	20	M10	1.2


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws, Full grip jaws


with fine serration 90°



SHB
Hard stepped top jaws



SWB-SA
Full grip jaws



SWB-SM
Full grip jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	B1 [mm]	H [mm]	H2 [mm]	L [mm]	T [mm]	a [mm]	b [mm]	c [mm]	Screws	m/SET [kg]
ROTA NCF plus 2 185-52	SWB-SA 165	0170099	14	120	40	58	48	59.5		25	20		M10	2.2
ROTA NCF plus 2 185-52	SWB-SM 165	0169099	14	120	40	60	50	59.5		24.5	20		M10	6.0
ROTA NCF plus 2 185-52	SHB 165	0121101	14	30		46		79.7	11	16.6	22	22	M10	1.3

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Claw jaws

with fine serration 90°



SZA
Claw jaws


Technical data

Chuck type	Clamping range ØD	Swing diameter SDmax	Description	ID	N	B	H	L	T	G	b	Screws	m/SET
	[mm]	[mm]			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]		[kg]
ROTA NCF plus 2 185-52	40 – 76	200	SZA 17-1	0122260	14	30	47	71.5	20	M6	20	M10	1.2
ROTA NCF plus 2 185-52	62 – 99	200	SZA 17-2	0122261	14	30	47	61.9	20	M6	20	M10	1.0
ROTA NCF plus 2 185-52	89 – 126	202	SZA 17-3	0122262	14	30	47	58.7	20	M6	20	M10	1.0
ROTA NCF plus 2 185-52	115 – 152	210	SZA 17-4	0122263	14	35	47	60.3	20	M6	20	M10	1.2


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

T-nut

with fine serration 90°



NKA
T-nut




NKS
T-nut

Chuck type	Description	ID	N	B	H	H1	L	b	Cyl.-screw	Max. adm. tightening torque
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[Nm]
ROTA NCF plus 2 185-52	NKA 1	0145103	14	17	18.5	6.5	36	20	M10 x 25	50
ROTA NCF plus 2 185-52	NKS 1	0143104	14	17	18.5	6.5	16		M10 x 25	50

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws

with fine serration 90°

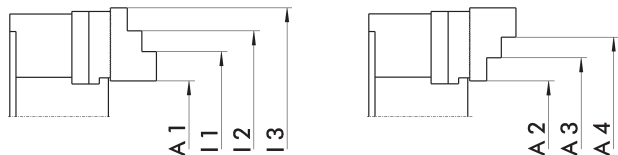

Jaw position I

Jaw position II

O.D. clamping

Chuck type	Description	ID	A1 [mm]	A2 [mm]	A3 [mm]	A4 [mm]
ROTA NCF plus 2 185-52	SHB 165	0121101	17 - 80	20 - 75	70 - 119	114 - 175

I.D. clamping

Chuck type	Description	ID	I1 [mm]	I2 [mm]	I3 [mm]
ROTA NCF plus 2 185-52	SHB 165	0121101	83 - 132	127 - 182	177 - 225

Accessories

Clamping force tester

For measuring the jaw clamping force of 2, 3 and 6-jaw chucks up to 6,000 RPM.



Suitable for	Description	ID
ROTA NCF plus 2 185-52	IFT Set	1404235

Grease

LINOMAX plus

High-performance grease as standard for regularly lubricating SCHUNK manual and power lathe chucks and steady rests.



Bundle	Description	ID
Cartridge	LINOMAX plus cartridge	1342585
Can	LINOMAX plus can	1342586
Bucket	LINOMAX plus bucket	1342587

Grease gun

Auxiliary tools for lubrication of all kinds of SCHUNK products. The grease gun can be used for cartridges of all types of SCHUNK grease.



Bundle	Description	ID
Cartridge	Grease gun	9900543



**H.-D. SCHUNK GmbH & Co.
Spanntechnik KG**

Lothringer Str. 23
D-88512 Mengen
Tel. +49-7572-7614-1300
Fax +49-7572-7614-1039
CMM@de.schunk.com
schunk.com