



ROTA NCE

**Energy-efficient lightweight
chuck for maximum process
dynamics**

Robust lightweight chuck with up to 40% reduced moment of inertia at highest rigidity

The ROTA NCE unifies lightweight design, maximum load capacity and an extraordinary form language all in one. Ideal preconditions for high process dynamics. Particularly in large-scale production, it provides significant savings and is also ideally suited for the energy management certification DIN EN ISO 50001.



Advantages – Your benefits

- + Energy efficient thanks to extremely low moment of inertia**
Shorter cycle times and reduced energy costs
- + Connection dimensions 100% compatible with power lathe chucks from the Kitagawa BB200 series (up to size 260)**
Existing Kitagawa chucks can be replaced within a short time period
- + Precision wedge-hook power lathe chuck for highest quality requirements**
Allows excellent machining results
- + High efficiency of the wedge hook system**
Process-reliable clamping due to high clamping forces
- + Optimized lubrication system**
Consistently high clamping forces ensured
- + Modular center sleeve system**
Optimal adjustment to new clamping tasks thanks to the exchangeable center sleeves
- + Base jaws with fine serration 1.5 mm x 60° and 1/16" x 90° as standard**
High flexibility in the range of top jaws
- + All sides of the functional parts are hardened and ground**
Ensures a long service life

Technical data

Description	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. actuating force [kN]	Stroke/jaw [mm]	Through-hole [mm]	Piston stroke [mm]	Moment of inertia [kgm ²]
ROTA NCE 130-38	7500	45	19	3.2	38	14	0.009
ROTA NCE 165-53	6000	65	26	3.3	53	14	0.032
ROTA NCE 210-66	5000	100	38	4.2	66	18	0.08
ROTA NCE 260-81	4500	130	45	4.9	81	21	0.195
ROTA NCE 315-106	3500	155	58	5.8	106	25	0.44

Function of ROTA NCE


The axially movable piston transfers the force to the base jaw and generates a radial jaw movement synchronized with the rotational axis.



- 1 Wedge hook drive**
Offers constantly high clamping forces in operation
- 2 Hardened and extremely rigid base body**
Therefore a longer service life at highest precision.
Even with maximum clamping force
- 3 Large through-hole**
For machining all conventional bar diameters
- 4 Optimized lubrication system**
For a high level of efficiency
- 5 Mounting thread**
For workpiece stops
- 6 Base jaw interface**
Inch, metric or with tongue and groove available
- 7 Jaw stroke display**
To verify the jaw stroke
- 8 Center sleeve**
With prefabricated mounting thread for the draw tube or drawbar
- 9 Weight-optimized design**
For great economy in daily use


Changing the center sleeve

The modular center sleeves can be changed quickly and easily while the chuck remains mounted. When the three screws are undone, all the protection sleeves can be pulled off from the front and replaced.

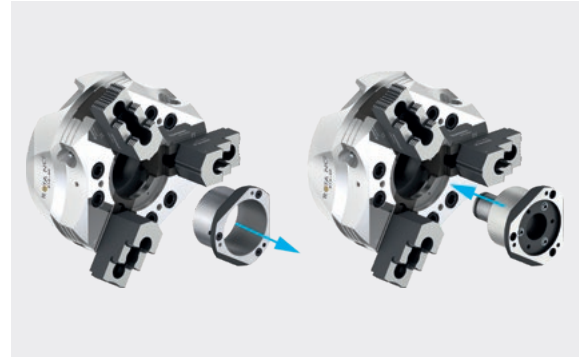


Long and precise piston guidance

For high clamping repeatability and long service life. All functional components used for force transmission are hardened and ground.

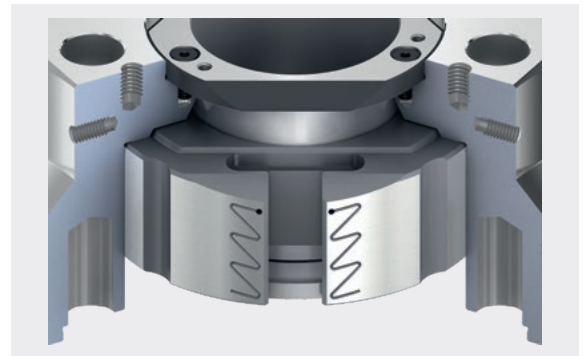

Base jaw safety feature

The small nose at the base jaw remains on the chuck body. This prevents the ejection of the jaws in case of a crash.

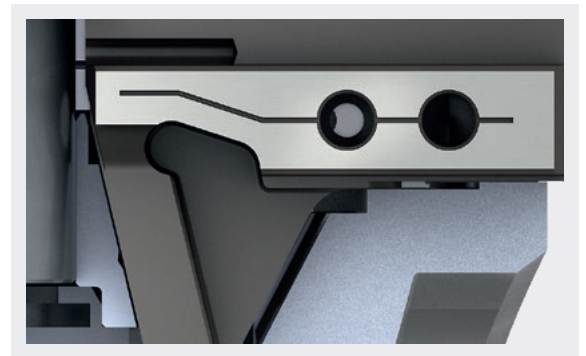

Jaw stroke display


The jaw stroke display is an additional safety feature, which ensures safe workpiece clamping and simplifies the use of the chuck in daily operation.

1 Jaw stroke display




Absolute flexibility of the base jaw

Select between three standard jaw interfaces 1/16" x 90°, 1.5 mm x 60°, or tongue and groove with the advantage of being able to continue using your existing top jaws on the new SCHUNK chuck.

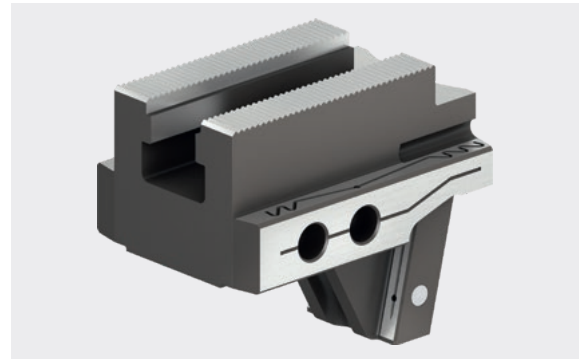

Modular center sleeve system

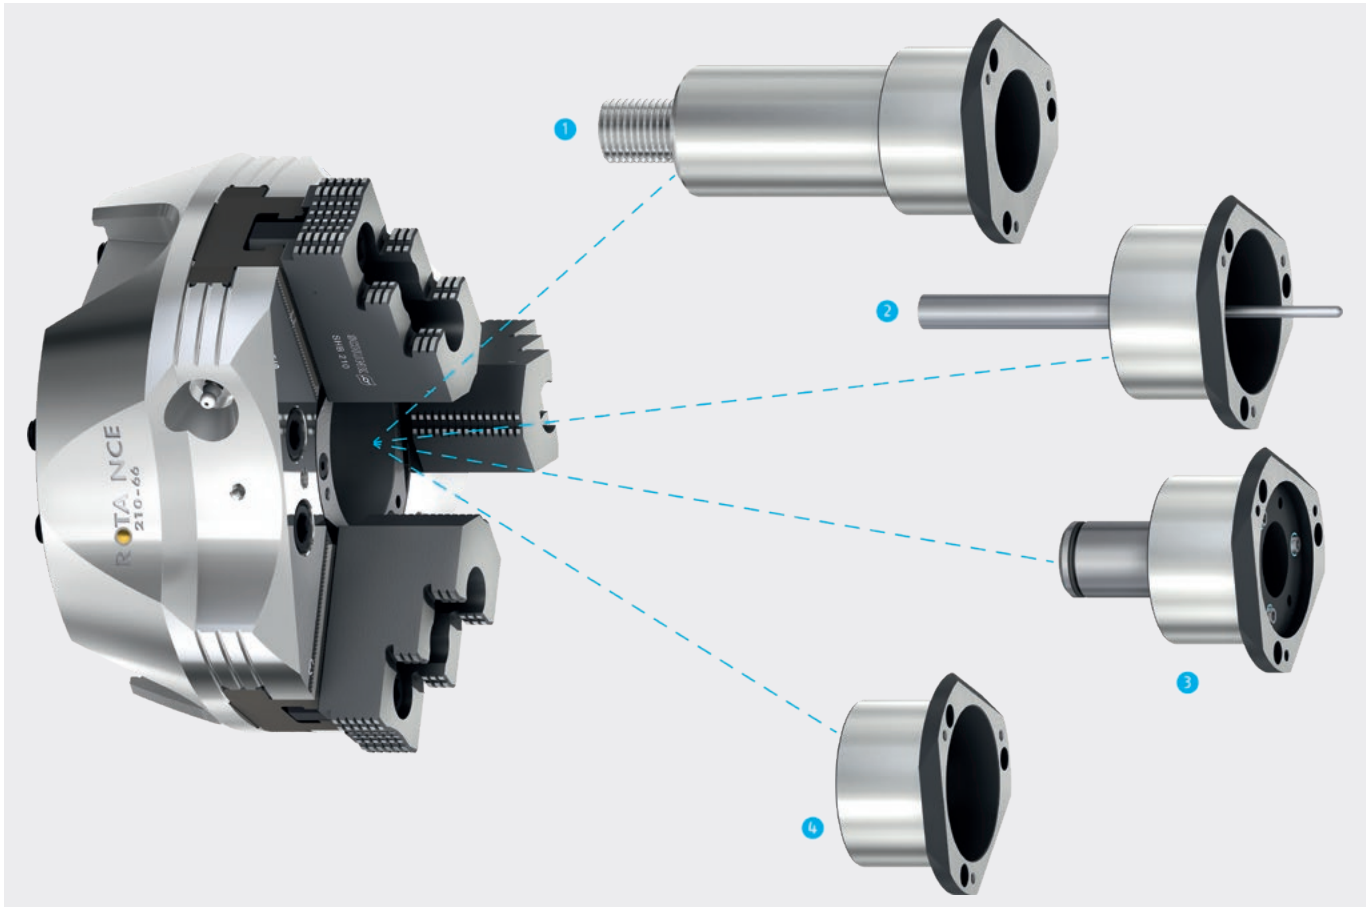


The modular center sleeve system increases flexibility for the most various applications in everyday life.

- 1 Adjustable stop in the center sleeve**
The adjustable stop ensures that all workpieces are stopped with high repeat accuracy in the same selectable position. This makes handling quick and easy.
- 2 Part ejector in the center sleeve**
An optimum addition for automatic loading. The part ejector disposes of a gas spring, which will eject your workpiece safely out of the chuck.
- 3 Coolant nozzles in the center sleeve**
Ideal as an additional component if your machine is equipped with a central coolant supply. For I.D. machining, coolant will be fed directly to the tool.
- 4 Closed center sleeve**
The closed center sleeve prevents penetration of chips and coolant into the through-hole.

Weight-optimized power lathe chuck ROTA NCE

Initial situation

The starting point for today's ROTA NCE was a traditional power lathe chuck with through-hole. This chuck represented the constructive volume for the finite element (FE) model, which was modified by optimization until the desired volume and weight reductions were achieved.

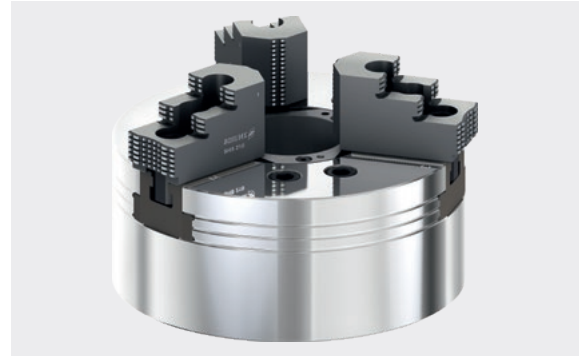


FE topology optimization

In the first step, FE topology optimization was used to calculate the lightest chuck design from the force flow, in which maximum stiffness is achieved.



FE parameter optimization


In the second step, FE parameter optimization was used to optimize the design of the highly loaded notch geometries in such a way that minimum notch stresses and maximum stiffness values could be achieved.

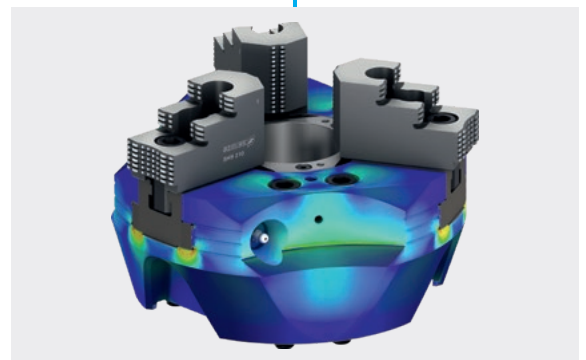

Result

The optimization process resulted in the current ROTA NCE, in which a computer-based adjustment of the chuck geometry to the prevailing force flow reduced the mass and the mass moment of inertia by up to 40% respectively – while maintaining the rigidity of the chuck.





- 8

Technical data

Spindle type	Spindle size	ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. actuating force [kN]	Moment of inertia [kgm ²]	Weight [kg]
ISO 702-4	Nr. 6 (Z170)	0808020	1/16" x 90°	5000	100	38	0.08	15
ISO 702-1	Nr. 6	0808021	1/16" x 90°	5000	100	38	0.092	16.7
ISO 702-4	Nr. 6 (Z170)	0808022	1.5 mm x 60°	5000	100	38	0.08	15
ISO 702-1	Nr. 6	0808023	1.5 mm x 60°	5000	100	38	0.092	16.7


Scope of delivery

Chuck, T-nuts with screws, chuck mounting screws, mounting wrench for turnable threaded ring, center sleeve, eye bolt, and operating manual

Further technical data

Chuck type	Through-hole [mm]	Stroke/jaw [mm]	Piston stroke (H) [mm]	Center jaw height [mm]
ROTA NCE 210-66	66	4.2	18	71.5

Clamping force-RPM-diagram

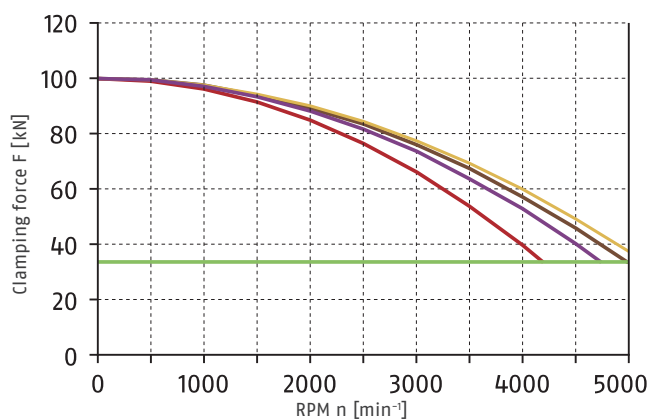

Required minimum clamping force F_{spmin} 33%

SHB 210
2 kg



SWB 200
4.1 kg




SHB-J 80
1.85 kg



KM-WB 88
2.7 kg




Load of base jaw guidance



$$M_{max} = 2383 \text{ Nm}$$

Center sleeves



Center sleeve closed

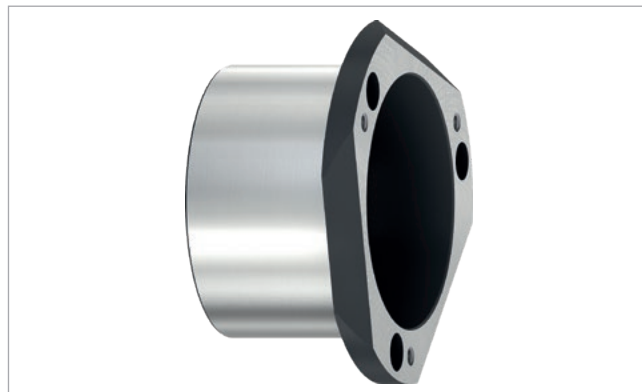

Technical data

Description	ID	Suitable for	ØA [mm]	B [mm]	K	Weight [kg]
SBS-G-E 210	1311442	ROTA NCE 210-66	66	36.7	M16x1.5	0.7

Protection sleeve with ejector

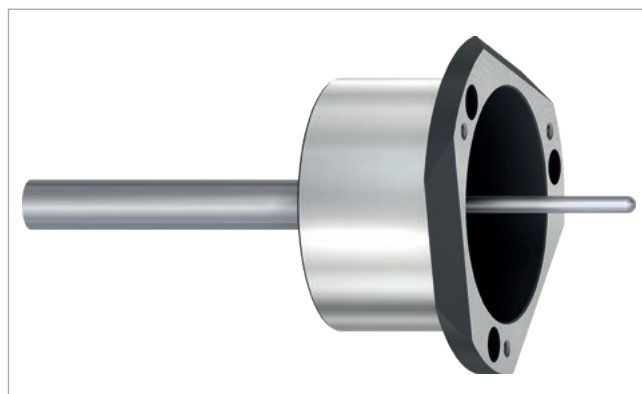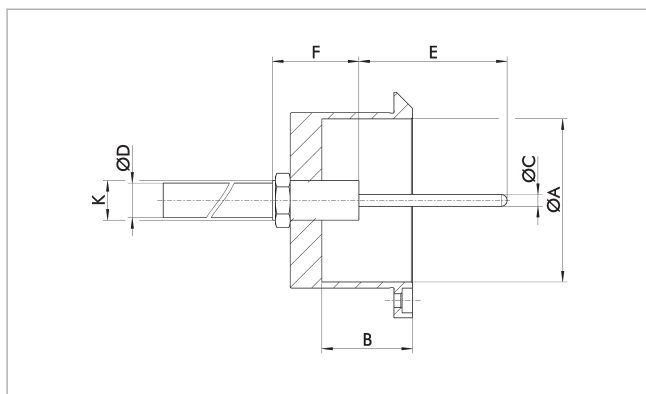


Technical data

Description	Suitable for	ØA [mm]	B [mm]	ØC [mm]	ØD [mm]	E [mm]	F [mm]	K
SBS-A-E 210	ROTA NCE 210-66	66	36	4.8	14	10 - 100	35	M16x1.5

- Center sleeves with ejector are available on request
- The ejector stroke is selectable in increments of 10 from 10 - 100 mm
- The ejection force is selectable with 40, 100, 150, 200, 250, or 300 N



Protection sleeve with spray nozzles

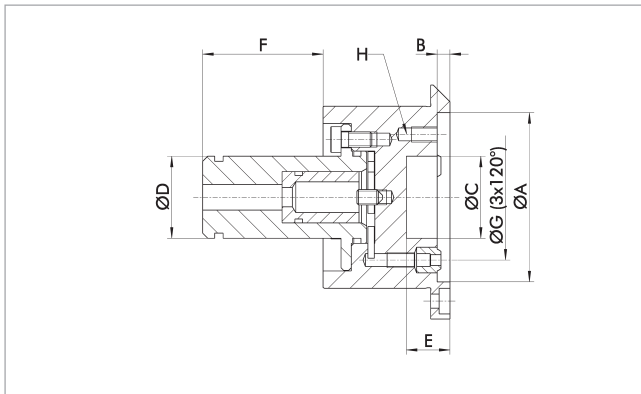

Technical data

Description	ID	Suitable for	ØA [mm]	B [mm]	ØC [mm]	ØD [mm]	F [mm]	ØG [mm]	H	Weight [kg]
SBS-S-E 210	1311440	ROTA NCE 210-66	66	5	32	32	47	49	M6x10	1.6

Center sleeve with adjustable stop

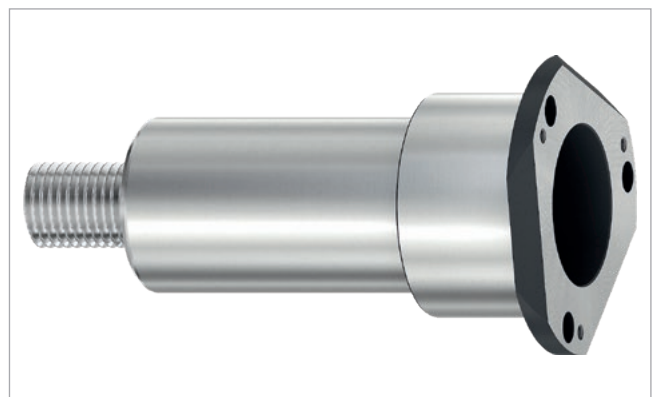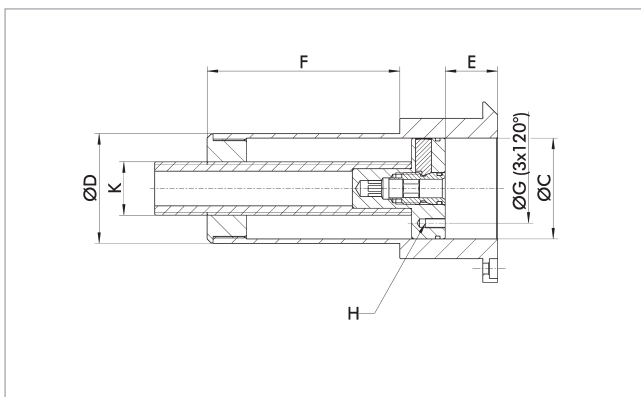

Technical data

Description	ID	Suitable for	ØC [mm]	ØD [mm]	E [mm]	F [mm]	ØG [mm]	H	K	Weight [kg]
SBS-T-E 210	1311441	ROTA NCE 210-66	51	55.5	0 - 110	97.5	35	M5x10	M27	2.1

- Important: Check the spindle/draw tube through-hole
- The spindle through-hole must be at least $\varnothing D + 0.5 \text{ mm}$

Adapter plates

Z-mount on short taper ISO 702-1



Technical data

Description	Adapter plate type	ID	Suitable for	D1	D2	D3	D4	D5	G	H	T1	T2
				[mm]			[mm]	[mm]		[mm]	[mm]	[mm]
FFK-T2 Z170-A5	FF-T2	0805109	ROTA NCE 210-66	Nr. 5	79.6	Z170	11 (6x60°) 14 (6x60°)	17	M12 (6x60°) M12 (3x120°)	25	104.8	133.4
FFK-T1 Z170-A6	FF-T1	0805102	ROTA NCE 210-66	Nr. 6	103.2	Z170	14 (3x120°)			17	133.4	
FFK-T3 Z170-A8	FF-T3	0805111	ROTA NCE 210-66	Nr. 8	110	Z170	17 (6x60°)	26	M12 (6x60°) M12 (3x120°)	40	171.4	133.4

Direct adapter plates

Direct adapter plates are used if the spindle mounting bolt circle has the same size as the lathe chuck mounting bolt circle. The adapter plate has to be mounted on to the spindle together with the lathe chuck. The adapter plate is preassembled on the lathe chuck.

Reduction adapter plates FF-T2


Reduction adapter plates are used if the mounting bolt circle of the spindle is smaller than the one of the lathe chuck mounting bolt circle. The adapter plate is first mounted on the spindle and then the lathe chuck is mounted on the adapter plate.

Expansion adapter plates FF-T3


Expansion adapter plates are used if the mounting bolt circle of the spindle is larger than the one of the lathe chuck mounting bolt circle. The adapter plate is first mounted on the spindle and then the lathe chuck is mounted on the adapter plate.

Soft top jaws


with fine serration 60°



KM-WB
Soft top jaws



KM-WBAL
Soft top jaws




KM-WBL
Soft top jaws

Technical data


Chuck type	Description	ID	N [mm]	B [mm]	H [mm]	L [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA NCE 210-66	KM-WBL 80	0132601	14	35	40	102	57	25	M12	2.7
ROTA NCE 210-66	KM-WBL 81	0132607	14	40	80	102	57	25	M12	6.0
ROTA NCE 210-66	KM-WBL 82	0132615	14	40	100	102	57	25	M12	7.6
ROTA NCE 210-66	KM-WB 84	0132126	14	35	60	95	46	25	M12	3.9
ROTA NCE 210-66	KM-WB 85	0132127	14	40	80	95	46	25	M12	6.1
ROTA NCE 210-66	KM-WB 88	0132139	14	35	40	95	46	25	M12	2.7
ROTA NCE 210-66	KM-WBAL 80	0132522	14	40	60	90	45	25	M12	1.5

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com


Hard stepped top jaws, Full grip jaws with fine serration 60°




KMWB-SA
Full grip jaws



KMWB-SM
Full grip jaws



SHB-J
Hard stepped top jaws



SHB-J
Hard stepped top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	B1 [mm]	H [mm]	H2 [mm]	L [mm]	T [mm]	a [mm]	b [mm]	c [mm]	Screws	m/SET [kg]
ROTA NCE 210-66	KMWB-SA 210	0132801	14	140	35	58	48	72.5		35	25		M12	3.1
ROTA NCE 210-66	KMWB-SA 211	0132805	14	140	35	80	70	72.5		35	25		M12	4.5
ROTA NCE 210-66	KMWB-SM 210	0132701	14	140	35	60	50	70		30	25		M12	8.8
ROTA NCE 210-66	KMWB-SM 211	0132705	14	140	35	80	70	70		30	25		M12	12.3
ROTA NCE 210-66	SHB-J 80	0133109	14	35		51		87	12	15.5	25	25	M12	1.8
ROTA NCE 210-66	SHB-J 82	0133110	14	32		38		79	12	16	25	25	M12	1.2

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

Claw jaws

with fine serration 60°



SZAJ
Claw jaws


Technical data

Chuck type	Clamping range ØD	Swing diameter SDmax	Description	ID	N	B	H	L	T	G	b	Screws	m/SET
	[mm]	[mm]			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]		[kg]
ROTA NCE 210-66	44 - 71	221	SZAJ 20-1	0138110	14	35	53	83	25	M6	25	M12	1.9
ROTA NCE 210-66	71 - 99	222	SZAJ 20-2	0138112	14	35	53	72.5	25	M6	25	M12	1.6
ROTA NCE 210-66	102 - 129	221	SZAJ 20-3	0138114	14	40	53	64.5	25	M6	25	M12	1.7
ROTA NCE 210-66	132 - 160	223	SZAJ 20-4	0138116	14	40	53	60	25	M6	25	M12	1.6
ROTA NCE 210-66	153 - 182	240	SZAJ 20-16	0138143	14	40	53	69	25	M6	25	M12	1.9


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

T-nut

with fine serration 60°



NJ
T-nut



NJ sawn
T-nut

Chuck type	Description	ID	N	B	H	H1	L	b	Cyl.-screw	Max. adm. tightening torque
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[Nm]
ROTA NCE 210-66	NJ 82 gesägt/sawn	0146005	14	20.3	20.5	8.5	20.5		M12 x 30	70
ROTA NCE 210-66	NJ 82	0146131	14	20.3	20.5	8.5	46.2	25	M12 x 30	70

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

Hard stepped top jaws

with fine serration 60°



Jaw position I

Jaw position II

O.D. clamping


Chuck type	Description	ID	A1 [mm]	A2 [mm]	A3 [mm]	A4 [mm]
ROTA NCE 210-66	SHB-J 80	0133109	35 - 105	25 - 98	87 - 160	137 - 210
ROTA NCE 210-66	SHB-J 82	0133110	33 - 107	131 - 202		

I.D. clamping

Chuck type	Description	ID	I1 [mm]	I2 [mm]	I3 [mm]
ROTA NCE 210-66	SHB-J 80	0133109	100 - 168	149 - 218	209 - 279
ROTA NCE 210-66	SHB-J 82	0133110	104 - 176		

Soft top jaws


with fine serration 90°



CWB
Soft top jaws



FR-AL
Soft top jaws



SWBL
Soft top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	H [mm]	L [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA NCE 210-66	SWBL 200	0120153	17	35	40	98	61	22	M12	2.6
ROTA NCE 210-66	CWB 200	0100006	17	40	40	90	43	22	M12	2.7
ROTA NCE 210-66	SWB 200	0120104	17	40	60	90	43	22	M12	4.1
ROTA NCE 210-66	FR-AL 200	0120602	17	40	60	90	59	19	M12	1.6
ROTA NCE 210-66	SWB-AL 200	0168101	17	40	60	90	43	22	M12	1.5


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

Hard stepped top jaws, Full grip jaws


with fine serration 90°



SHB
Hard stepped top jaws



SWB-SA
Full grip jaws



SWB-SM
Full grip jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	B1 [mm]	H [mm]	H2 [mm]	L [mm]	T [mm]	a [mm]	b [mm]	c [mm]	Screws	m/SET [kg]
ROTA NCE 210-66	SWB-SA 200	0170101	17	140	40	58	48	72.5		35	22		M12	3.1
ROTA NCE 210-66	SWB-SA 201	0170106	17	140	40	75	65	72.5		35	22		M12	4.2
ROTA NCE 210-66	SWB-SM 200	0169101	17	140	40	60	50	69.5		35	22		M12	8.6
ROTA NCE 210-66	SWB-SM 201	0169106	17	140	40	75	65	69.5		35	22		M12	11.5
ROTA NCE 210-66	SHB 200	0121104	17	40		49		72.5	12	18	19	19	M12	1.6
ROTA NCE 210-66	SHB 210	0121102	17	40		49		84.3	12	28.7	19	19	M12	2.0

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Claw jaws

with fine serration 90°



SZA
Claw jaws

Technical data

Chuck type	Clamping range ØD	Swing diameter SDmax	Description	ID	N	B	H	L	T	G	b	Screws	m/SET
	[mm]	[mm]			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]		[kg]
ROTA NCE 210-66	38 - 69	223	SZA 20-14	0138195	17	35	50	85	25	M6	22	M12	1.8
ROTA NCE 210-66	65 - 97	223	SZA 20-15	0138196	17	35	50	72.9	25	M6	22	M12	1.5
ROTA NCE 210-66	94 - 126	224	SZA 20-16	0138197	17	40	50	65.1	25	M6	22	M12	1.5
ROTA NCE 210-66	120 - 152	224	SZA 20-17	0138198	17	40	50	66.7	25	M6	22	M12	1.6
ROTA NCE 210-66	152 - 184	249	SZA 20-18	0138199	17	40	50	71.4	25	M6	22	M12	1.8
ROTA NCE 210-66	35 - 66	238	SZA 25-6	0138176	17	35	55	97.7	25	M6	22	M12	2.3
ROTA NCE 210-66	156 - 190	257	SZA 25-9	0138179	17	40	55	81	25	M6	22	M12	2.4

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

T-nut

with fine serration 90°



NKA
T-nut




NKS
T-nut

Chuck type	Description	ID	N	B	H	H1	L	b	Cyl.-screw	Max. adm. tightening torque
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[Nm]
ROTA NCE 210-66	NKA 2	0145104	17	19	20.5	7.5	42	22	M12 x 25	70
ROTA NCE 210-66	NKS 2	0143106	17	19	20.5	7.5	19		M12 x 25	70

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws

with fine serration 90°

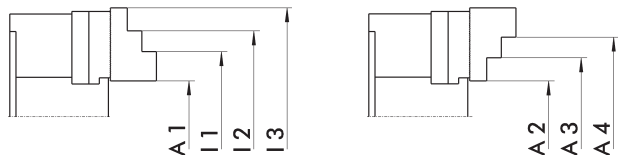

Jaw position I

Jaw position II

O.D. clamping

Chuck type	Description	ID	A1 [mm]	A2 [mm]	A3 [mm]	A4 [mm]
ROTA NCE 210-66	SHB 200	0121104	43 - 114	49 - 121	97 - 170	139 - 212
ROTA NCE 210-66	SHB 210	0121102	22 - 96	47 - 120	97 - 170	143 - 216

I.D. clamping

Chuck type	Description	ID	I1 [mm]	I2 [mm]	I3 [mm]
ROTA NCE 210-66	SHB 200	0121104	102 - 171	144 - 213	189 - 260
ROTA NCE 210-66	SHB 210	0121102	99 - 170	144 - 216	192 - 265

Accessories

Clamping force tester

For measuring the jaw clamping force of 2, 3 and 6-jaw chucks up to 6,000 RPM.



Suitable for	Description	ID
ROTA NCE 210-66	IFT Set	1404235

Mounting wrench

For power lathe chucks with a turnable threaded ring in pipe design with two actuation tabs.



Suitable for	Description	ID
ROTA NCE 210-66	SSH-MR Ø66-130	1301752

Grease

LINOMAX plus

High-performance grease as standard for regularly lubricating SCHUNK manual and power lathe chucks and steady rests.



Bundle	Description	ID
Cartridge	LINOMAX plus cartridge	1342585
Can	LINOMAX plus can	1342586
Bucket	LINOMAX plus bucket	1342587

Grease gun

Auxiliary tools for lubrication of all kinds of SCHUNK products. The grease gun can be used for cartridges of all types of SCHUNK grease.



Bundle	Description	ID
Cartridge	Grease gun	9900543



**H.-D. SCHUNK GmbH & Co.
Spanntechnik KG**

Lothringer Str. 23
D-88512 Mengen
Tel. +49-7572-7614-1300
Fax +49-7572-7614-1039
CMM@de.schunk.com
schunk.com