



KONTEC KSC3-K

**Extremely compact single-
acting clamping vise for
precise machining of the
sixth side**

Compact single-acting vise with high clamping forces at maximum precision with nickel-plated base body

With the new SCHUNK KONTEC KSC3-K single-acting clamping vise, the successful KSC3 series of centric clamping vises gets another elementary component. The base body of the KSC3-K vises has now been extended to include a transverse groove for the fixed jaw. This means that precise second-side machining is now also possible. Especially in multiple applications, such as on tombstones, synergies can be achieved with centric and single-acting clamping vises, and processes can be significantly accelerated.




Advantages – Your benefits





- + Nickel-plated base body**
For optimal corrosion protection and an even wider range of applications
- + Extremely flat design**
For maximum utilization of the machine room
- + High clamping forces**
Ensure process reliability during machining
- + Large clamping range**
High level of flexibility
- + Lateral drainage slots**
For drainage of coolant and chips
- + Optimum jaw support for O.D. and I.D. clamping due to a very long base jaw guidance**
Allows high clamping forces at a long service life
- + Jaw change with just two screws**
For quick and easy jaw change
- + Integrated NSE3, GFD and GFD mini interface**
Minimization of set-up times. Can be flexibly combined with the large modular quick-change pallet system

Function KSC3-K

SCHUNK KONTEC KSC3-K single-acting clamping vises are manual direct clamping vises. The drive takes place via a spindle. The force builds up directly without a force amplifier and is linear. The movable jaw is moved by turning the spindle in direction of the fixed jaw. The clamping force depends on the torque. The clamping range depends on the used jaw range.

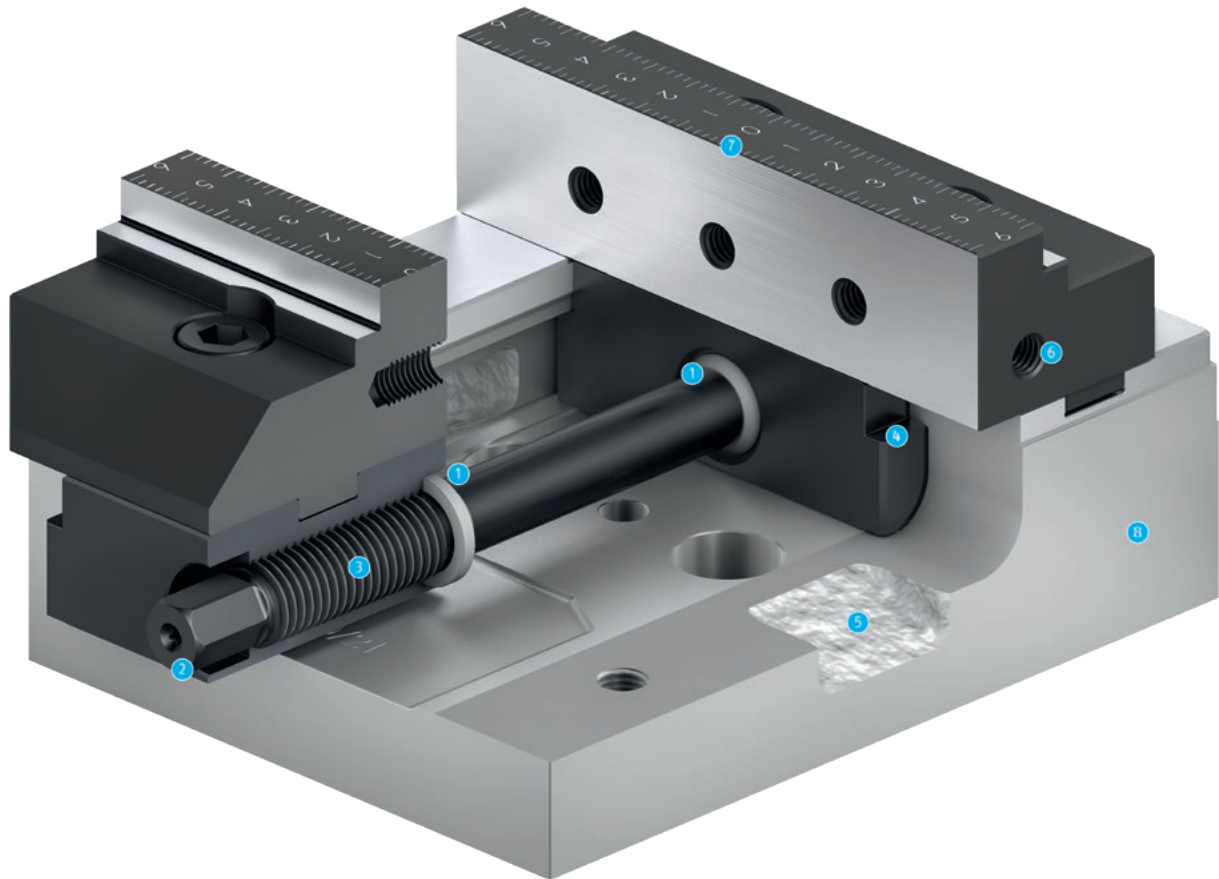

- 1 Encapsulated system**
Offers optimal protection against coolant and chips
- 2 Recessed hexagonal connection**
Reduces the interfering contour
- 3 Spindle drive**
For the highest of clamping forces
- 4 Long slide**
Offers optimal support for O.D.- and I.D. clamping
- 5 Drainage slots**
For coolant and chips
- 6 Mounting thread**
For workpiece stops
- 7 System jaws and top jaws**
World's largest selection
- 8 Low height design**
Expands your machine's workspace

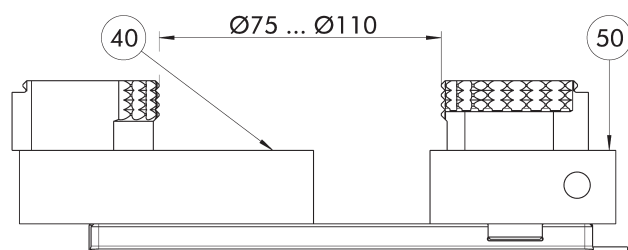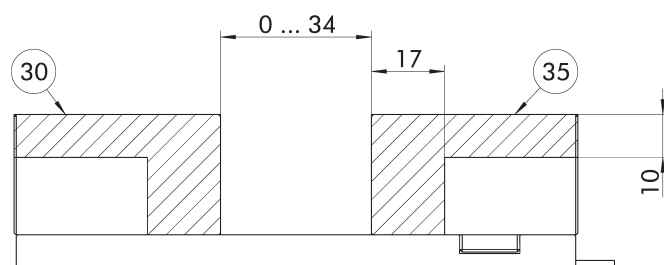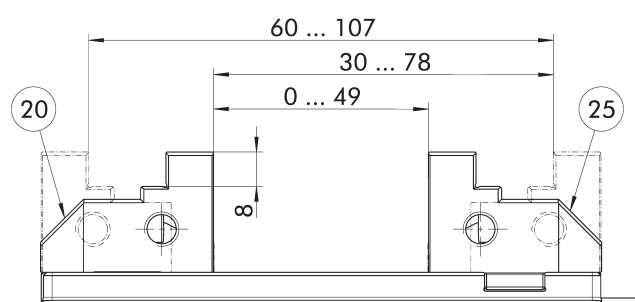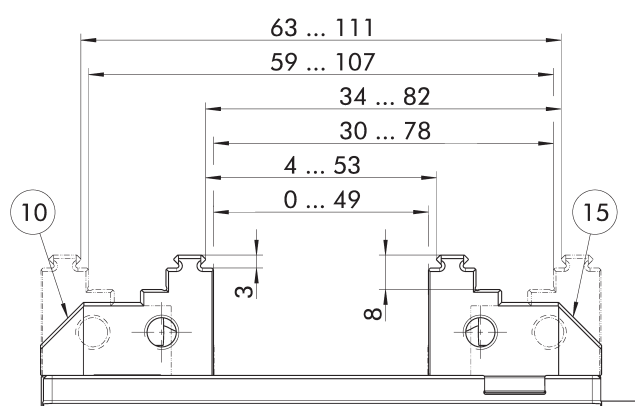

Suitable system jaws with position number on the next page.
Subject to technical changes.

- ① 6-way reversal grip jaw (ID 0430803), 6-way reversal carbide grip jaw (ID 1395550)

Technical data

Description	ID	Vise included	Width of the clamping vise [mm]	Max. clamping force [kN]	Max. torque [Nm]	Weight [kg]
KSC3-K 80-130	1508858		80	25	90	3.1
KSC3-K precise 80-130	1577204	Reversible smooth jaw	80	25	90	4.1

Scope of delivery

Vise, operating manual; without system jaws


Note

System jaws


Depending on the version, the clamping device must be assembled separately with the system jaws or is already equipped with them (precise version).

Suitable system jaws

Description	Pos.	Description	ID	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
Reversible grip jaw	10	SGWB-G3-B 80-40.3-28	0432715	80	40.3	28	0.5
Reversible grip jaw	15	SGWB-G3-F 80-40.3-28	0432732	80	40.3	28	0.5
Reversible smooth jaw	20	SGWB-S8-B 80-40-28	1518693	80	40	28	0.5
Reversible smooth jaw	25	SGWB-S8-F 80-40-28	1518694	80	40	28	0.5
Aluminum jaw	30	SGAL-B 80-48-28	0432718	80	48	28	0.4
Aluminum jaw	35	SGAL-F 80-48-28	0432733	80	48	28	0.4
Swivel plate	40	SGP-3 125-76-19	0432720	125	76	19	1.3
Adapter plate	50	SGA-4 125-48-19	0432735	125	48	19	0.8

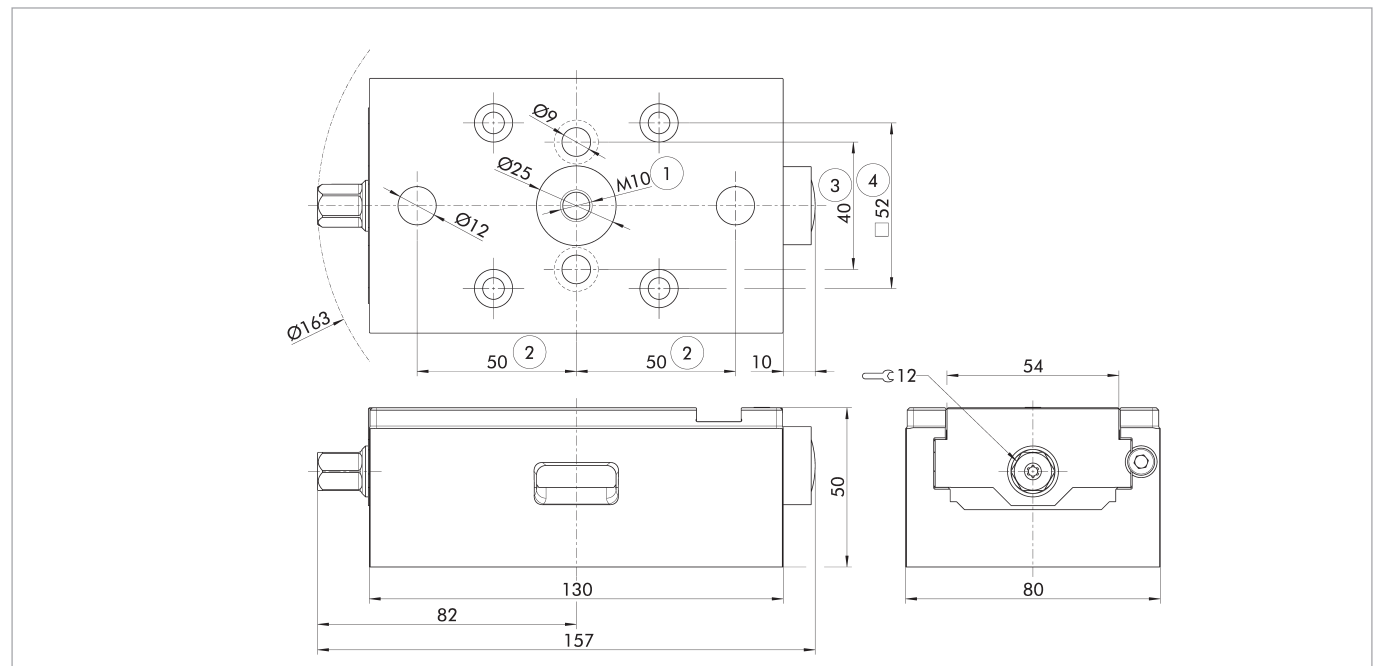

- ① Prepared for GFD clamping pins
- ② Prepared for GFD-IXB indexing pin or alignment pins $\varnothing 12$ m6
- ③ Prepared for M8 screws
- ④ Prepared for GFD-SP mini clamping pin $\varnothing 16$ h6

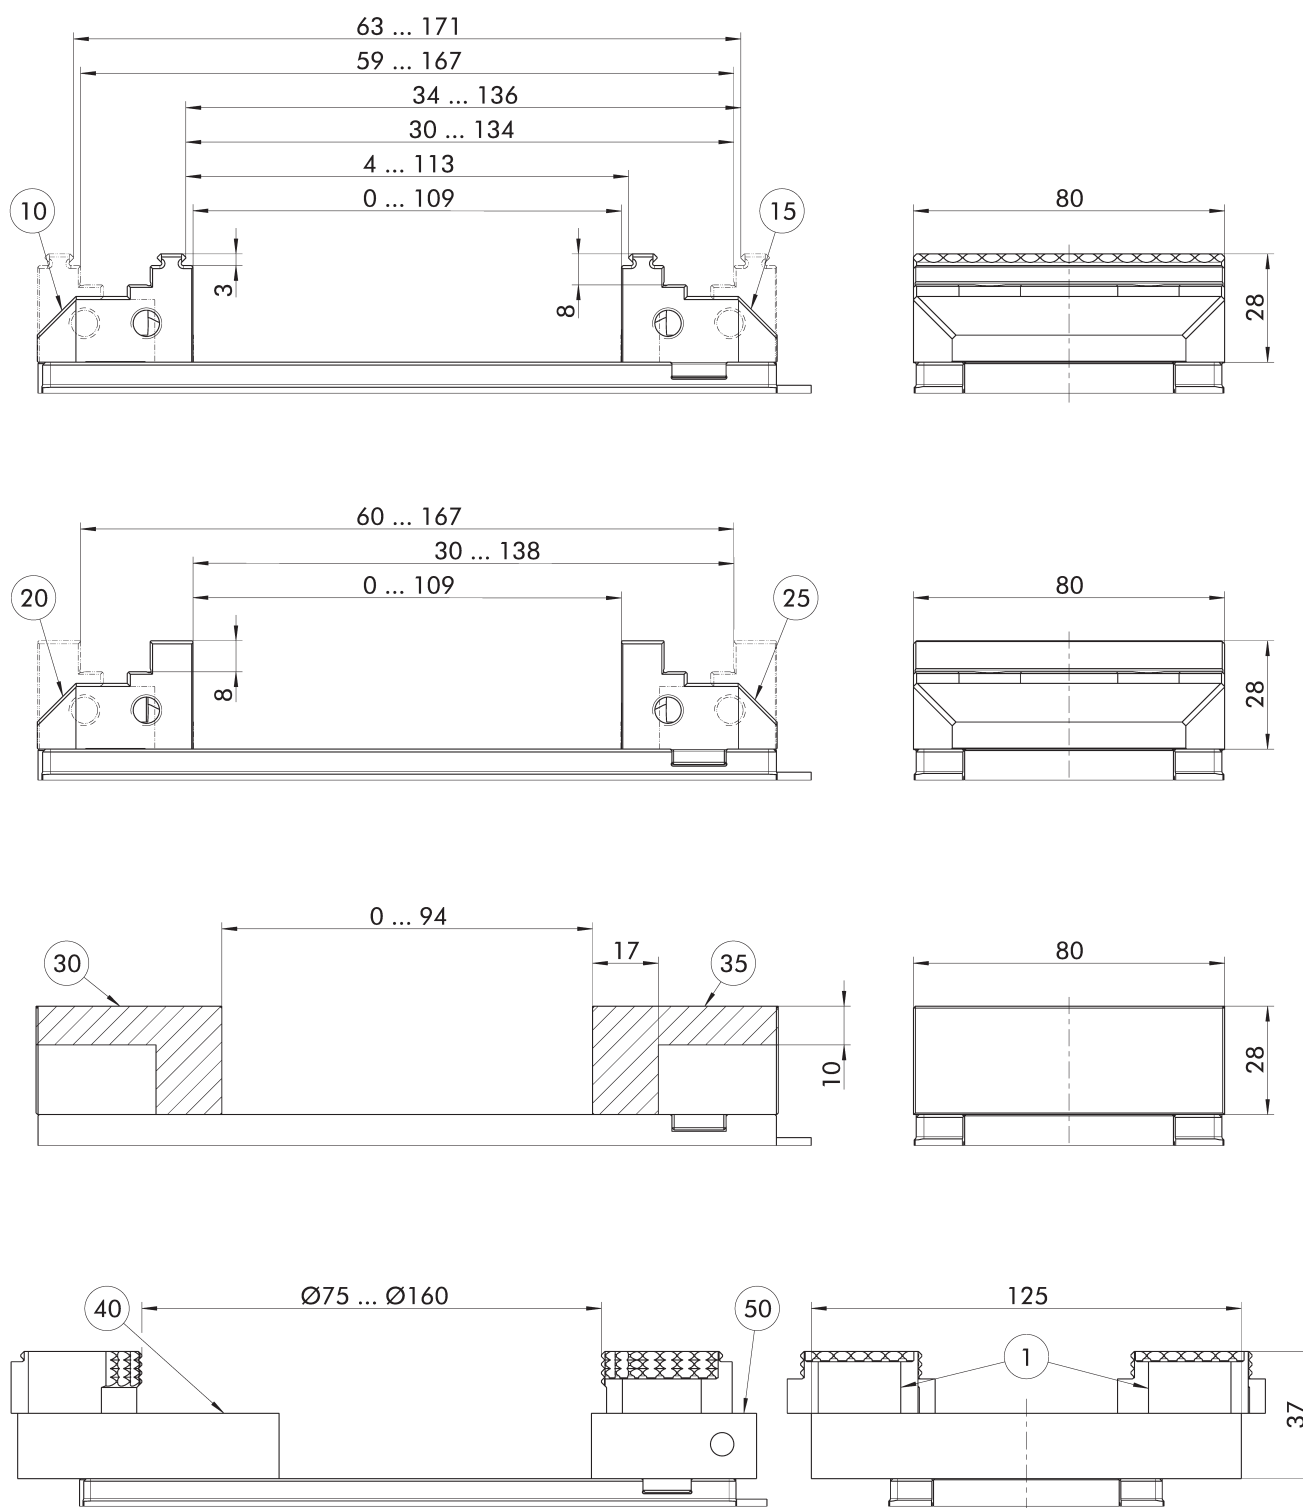

Suitable system jaws with position number on the next page.
Subject to technical changes.

- ① 6-way reversal grip jaw (ID 0430803), 6-way reversal carbide grip jaw (ID 1395550)

Technical data

Description	ID	Vise included	Width of the clamping vise [mm]	Max. clamping force [kN]	Max. torque [Nm]	Weight [kg]
KSC3-K 80-190	1514288		80	25	90	4.5
KSC3-K precise 80-190	1577205	Reversible smooth jaw	80	25	90	5.6

Scope of delivery

Vise, operating manual; without system jaws


Note

System jaws


Depending on the version, the clamping device must be assembled separately with the system jaws or is already equipped with them (precise version).

Suitable system jaws

Description	Pos.	Description	ID	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
Reversible grip jaw	10	SGWB-G3-B 80-40.3-28	0432715	80	40.3	28	0.5
Reversible grip jaw	15	SGWB-G3-F 80-40.3-28	0432732	80	40.3	28	0.5
Reversible smooth jaw	20	SGWB-S8-B 80-40-28	1518693	80	40	28	0.5
Reversible smooth jaw	25	SGWB-S8-F 80-40-28	1518694	80	40	28	0.5
Aluminum jaw	30	SGAL-B 80-48-28	0432718	80	48	28	0.4
Aluminum jaw	35	SGAL-F 80-48-28	0432733	80	48	28	0.4
Swivel plate	40	SGP-3 125-76-19	0432720	125	76	19	1.3
Adapter plate	50	SGA-4 125-48-19	0432735	125	48	19	0.8

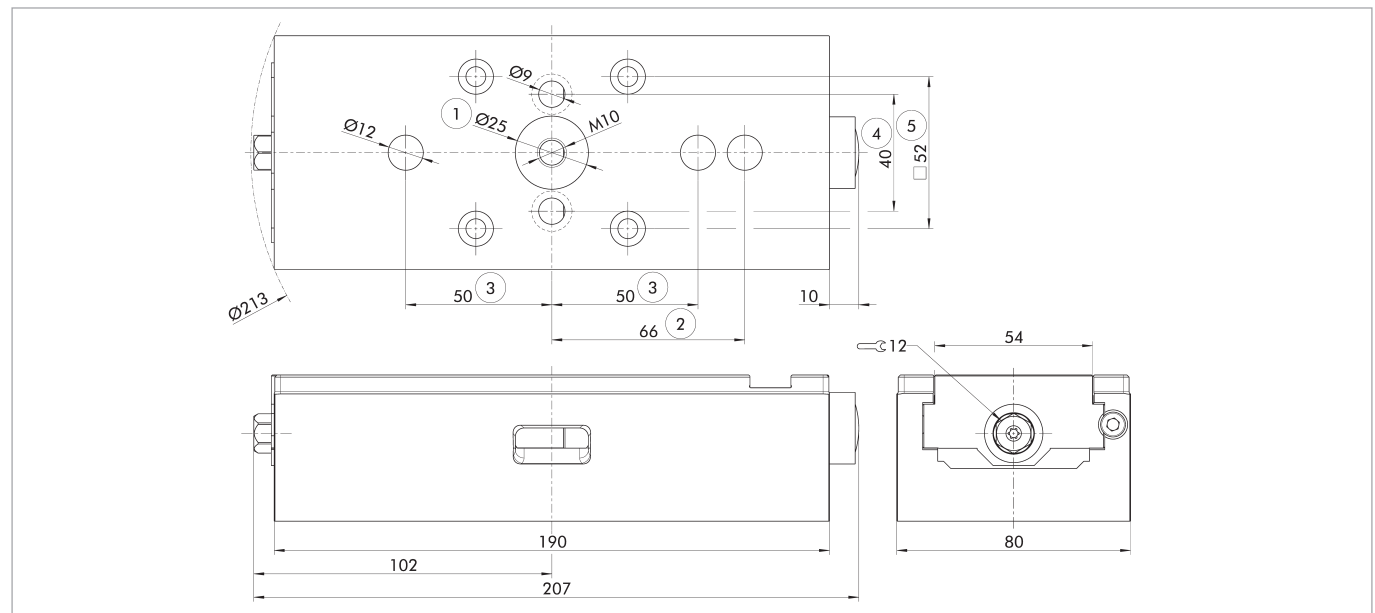

- ① Prepared for NSE3 and GFD clamping pins
- ② Prepared for indexing pin IXB V1-K
- ③ Prepared for GFD-IXB indexing pin or alignment pins Ø 12m6
- ④ Prepared for M8 screws
- ⑤ Prepared for GFD-SP mini clamping pin Ø16 h6

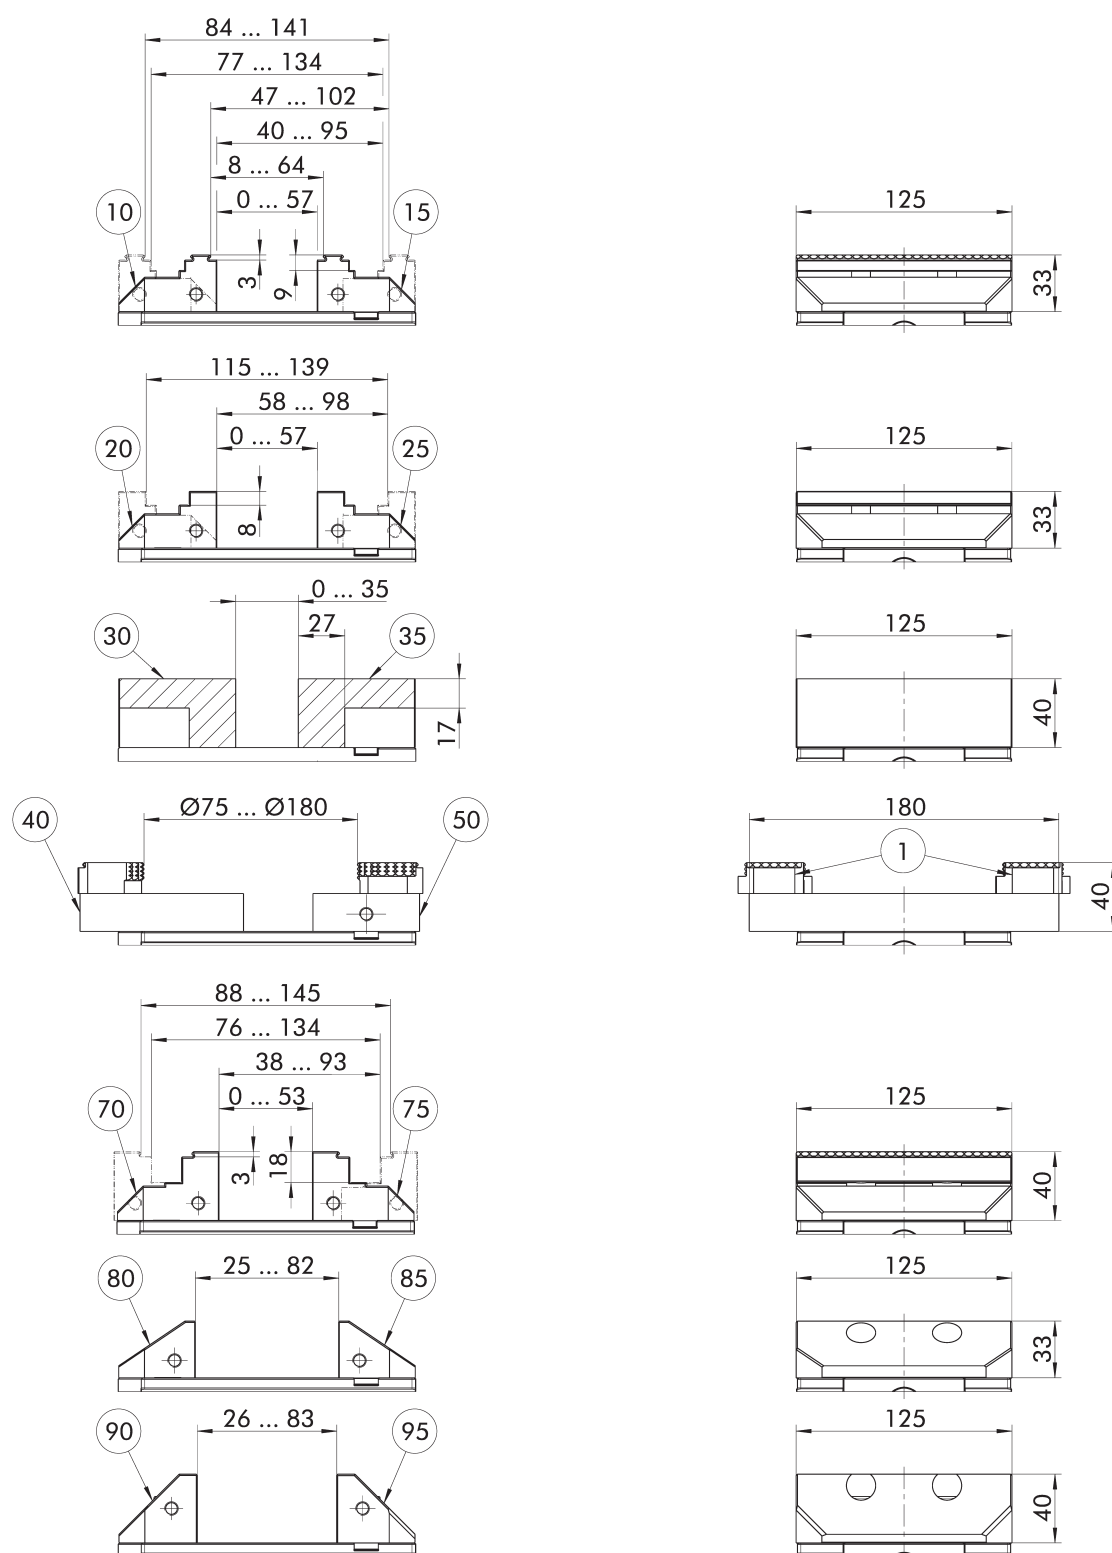

Suitable system jaws with position number on the next page.
Subject to technical changes.

- ① 6-way reversal grip jaw (ID 0430803), 6-way reversal carbide grip jaw (ID 1395550)

Technical data

Description	ID	Vise included	Width of the clamping vise [mm]	Max. clamping force [kN]	Max. torque [Nm]	Weight [kg]
KSC3-K 125-160	1514289		125	35	100	6.4
KSC3-K precise 125-160	1577206	Reversible smooth jaw	125	35	100	8.7

Scope of delivery

Vise, operating manual; without system jaws


Note

System jaws


Depending on the version, the clamping device must be assembled separately with the system jaws or is already equipped with them (precise version).

Suitable system jaws

Description	Pos.	Description	ID	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
Reversible grip jaw	10	SGWB-G3-B 125-57-33	0432474	125	57	33	1.3
Reversible grip jaw	15	SGWB-G3-F 125-57-33	1359848	125	57	33	1.3
Reversible smooth jaw	20	SGWB-S8-B 125-57-33	1518691	125	57	33	1.3
Reversible smooth jaw	25	SGWB-S8-F 125-57-33	1518692	125	57	33	1.3
Aluminum jaw	30	SGAL-B 125-68-40	0432469	125	68	40	1
Aluminum jaw	35	SGAL-F 125-68-40	0432492	125	68	40	1.1
Swivel plate	40	SGP-3 180-95-22	0432470	180	95	22	2.8
Adapter plate	50	SGA-4 180-62-22	0432493	180	62	22	1.9
Reversible jaw	70	SGWB-G3-B 125-59-40	0430387	125	59	40	1.7
Reversible jaw	75	SGWB-G3-F 125-59-40	1586742	125	59	40	1.7
5-axis jaw	80	SG5A-B 125-44.5-33	1374778	125	44.5	33	0.9
5-axis jaw	85	SG5A-F 125-44.5-33	1374779	125	44.5	33	0.9
5-axis jaw	90	SG5A-B 125-45.5-40	0432472	125	45.5	40	1.1
5-axis jaw	95	SG5A-F 125-45.5-40	1551488	125	45.5	40	1.1

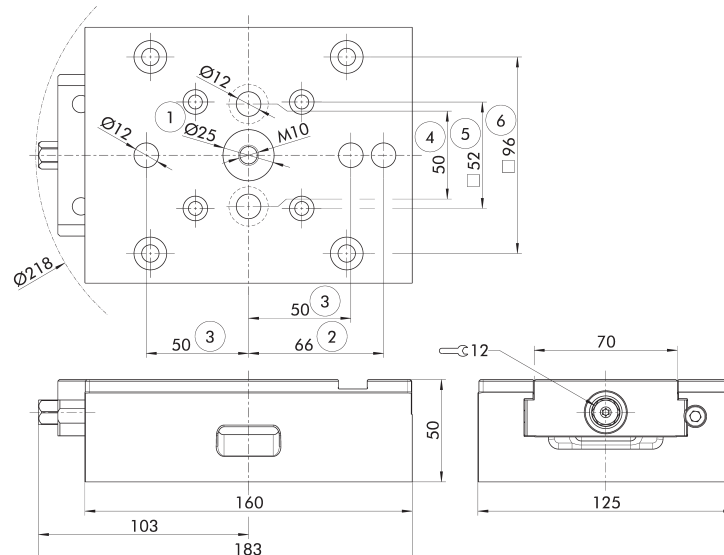

- ① Prepared for NSE3 and GFD clamping pins
- ② Prepared for indexing pin IXB V1-K
- ③ Prepared for GFD-IXB indexing pin or alignment pins Ø 12m6
- ④ Prepared for M12 screws
- ⑤ Prepared for GFD-SP mini clamping pin Ø16 h6
- ⑥ Prepared for GFD-SP mini clamping pin Ø20 h6

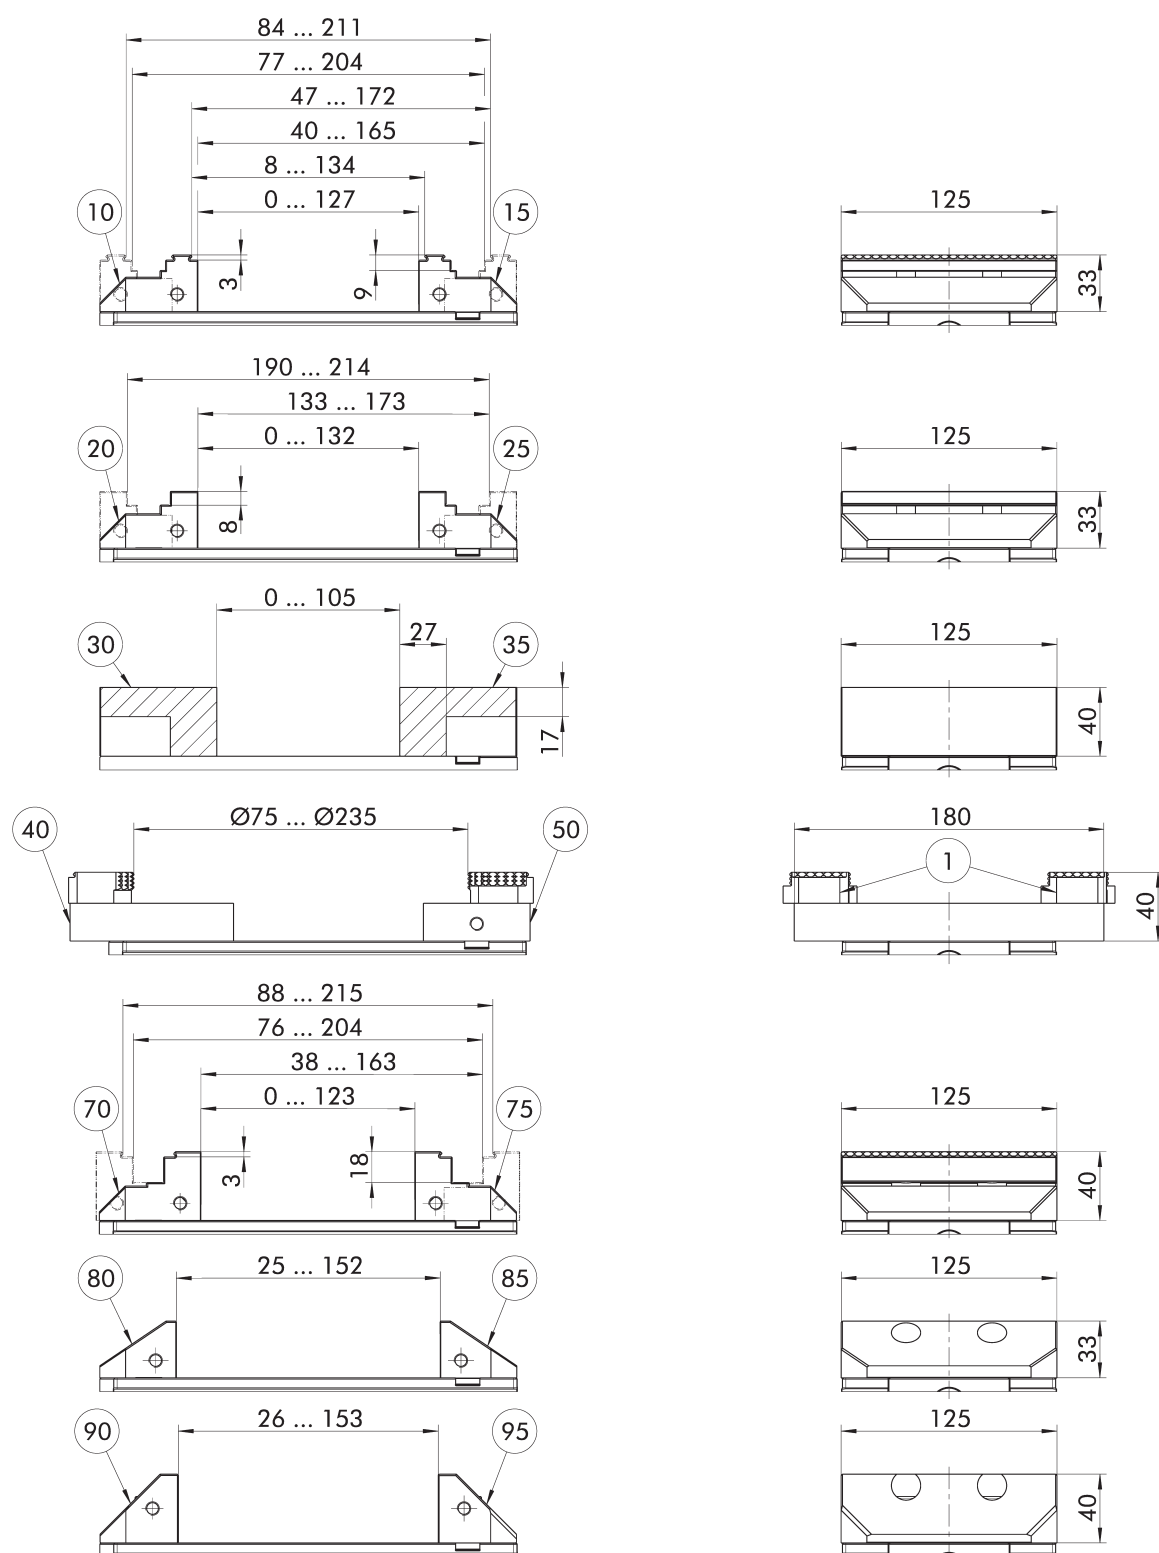

Suitable system jaws with position number on the next page.
Subject to technical changes.

- ① 6-way reversal grip jaw (ID 0430803), 6-way reversal carbide grip jaw (ID 1395550)

Technical data

Description	ID	Vise included	Width of the clamping vise [mm]	Max. clamping force [kN]	Max. torque [Nm]	Weight [kg]
KSC3-K 125-235	1514290		125	35	100	9.3
KSC3-K precise 125-235	1577207	Reversible smooth jaw	125	35	100	11.6

Scope of delivery

Vise, operating manual; without system jaws


Note

System jaws


Depending on the version, the clamping device must be assembled separately with the system jaws or is already equipped with them (precise version).

Suitable system jaws

Description	Pos.	Description	ID	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
Reversible grip jaw	10	SGWB-G3-B 125-57-33	0432474	125	57	33	1.3
Reversible grip jaw	15	SGWB-G3-F 125-57-33	1359848	125	57	33	1.3
Reversible smooth jaw	20	SGWB-S8-B 125-57-33	1518691	125	57	33	1.3
Reversible smooth jaw	25	SGWB-S8-F 125-57-33	1518692	125	57	33	1.3
Aluminum jaw	30	SGAL-B 125-68-40	0432469	125	68	40	1
Aluminum jaw	35	SGAL-F 125-68-40	0432492	125	68	40	1.1
Swivel plate	40	SGP-3 180-95-22	0432470	180	95	22	2.8
Adapter plate	50	SGA-4 180-62-22	0432493	180	62	22	1.9
Reversible jaw	70	SGWB-G3-B 125-59-40	0430387	125	59	40	1.7
Reversible jaw	75	SGWB-G3-F 125-59-40	1586742	125	59	40	1.7
5-axis jaw	80	SG5A-B 125-44.5-33	1374778	125	44.5	33	0.9
5-axis jaw	85	SG5A-F 125-44.5-33	1374779	125	44.5	33	0.9
5-axis jaw	90	SG5A-B 125-45.5-40	0432472	125	45.5	40	1.1
5-axis jaw	95	SG5A-F 125-45.5-40	1551488	125	45.5	40	1.1

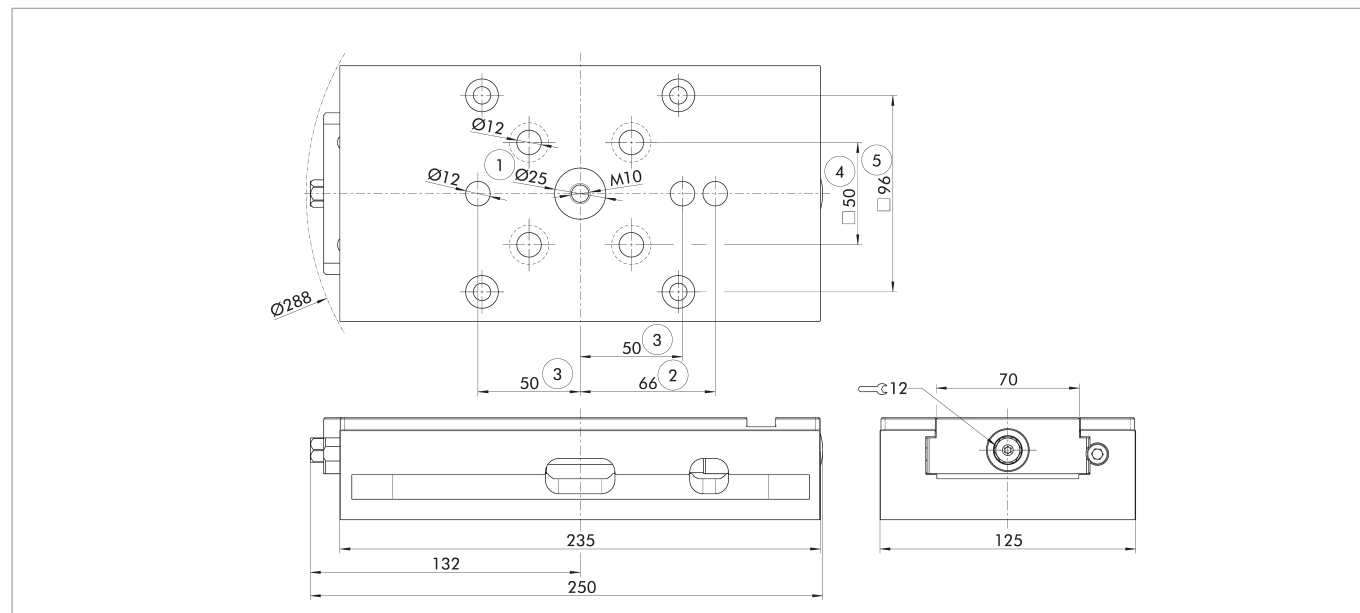

- ① Prepared for NSE3 and GFD clamping pins
- ② Prepared for indexing pin IXB V1-K
- ③ Prepared for GFD-IXB indexing pin or alignment pins Ø 12m6
- ④ Prepared for M12 screws
- ⑤ Prepared for GFD-SP mini clamping pin Ø20 h6

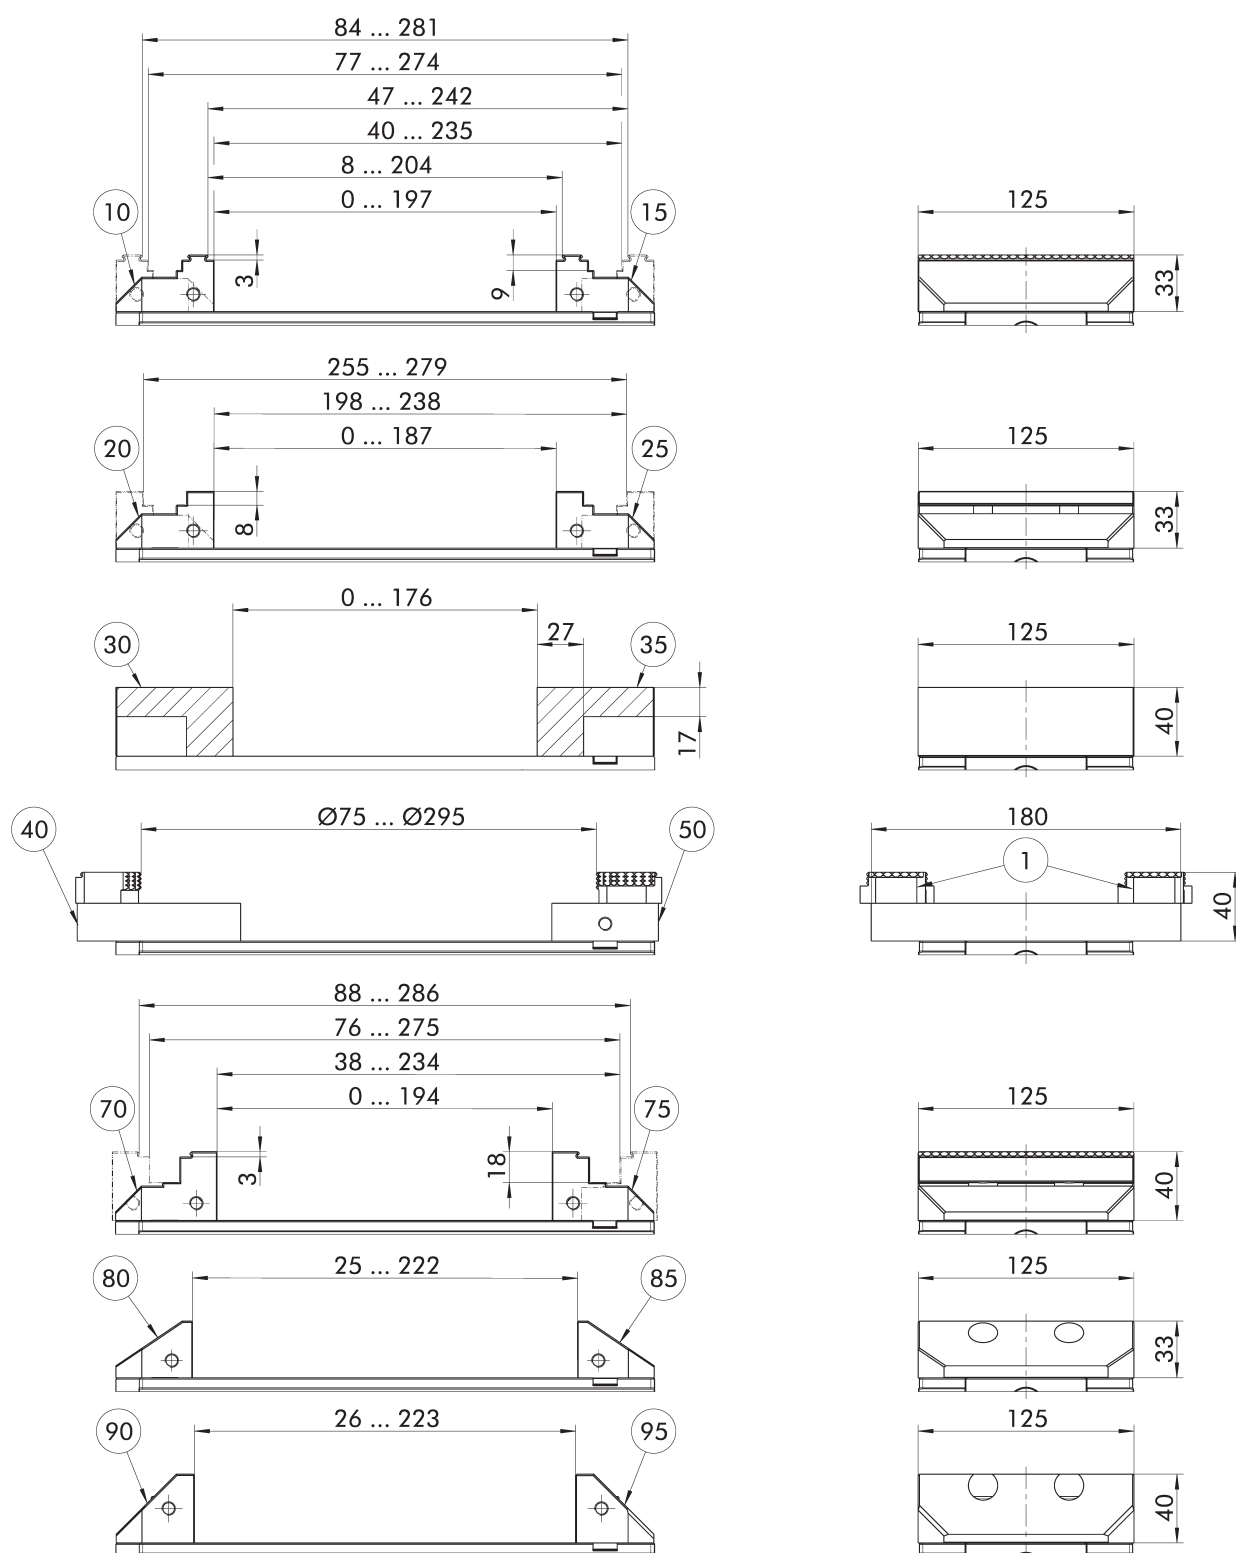

Suitable system jaws with position number on the next page.
Subject to technical changes.

- ① 6-way reversal grip jaw (ID 0430803), 6-way reversal carbide grip jaw (ID 1395550)

Technical data

Description	ID	Vise included	Width of the clamping vise [mm]	Max. clamping force [kN]	Max. torque [Nm]	Weight [kg]
KSC3-K 125-300	1514291		125	35	100	11.8
KSC3-K precise 125-300	1577208	Reversible smooth jaw	125	35	100	14.1

Scope of delivery

Vise, operating manual; without system jaws


Note

System jaws



Depending on the version, the clamping device must be assembled separately with the system jaws or is already equipped with them (precise version).

Suitable system jaws

Description	Pos.	Description	ID	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
Reversible grip jaw	10	SGWB-G3-B 125-57-33	0432474	125	57	33	1.3
Reversible grip jaw	15	SGWB-G3-F 125-57-33	1359848	125	57	33	1.3
Reversible smooth jaw	20	SGWB-S8-B 125-57-33	1518691	125	57	33	1.3
Reversible smooth jaw	25	SGWB-S8-F 125-57-33	1518692	125	57	33	1.3
Aluminum jaw	30	SGAL-B 125-68-40	0432469	125	68	40	1
Aluminum jaw	35	SGAL-F 125-68-40	0432492	125	68	40	1.1
Swivel plate	40	SGP-3 180-95-22	0432470	180	95	22	2.8
Adapter plate	50	SGA-4 180-62-22	0432493	180	62	22	1.9
Reversible jaw	70	SGWB-G3-B 125-59-40	0430387	125	59	40	1.7
Reversible jaw	75	SGWB-G3-F 125-59-40	1586742	125	59	40	1.7
5-axis jaw	80	SG5A-B 125-44.5-33	1374778	125	44.5	33	0.9
5-axis jaw	85	SG5A-F 125-44.5-33	1374779	125	44.5	33	0.9
5-axis jaw	90	SG5A-B 125-45.5-40	0432472	125	45.5	40	1.1
5-axis jaw	95	SG5A-F 125-45.5-40	1551488	125	45.5	40	1.1

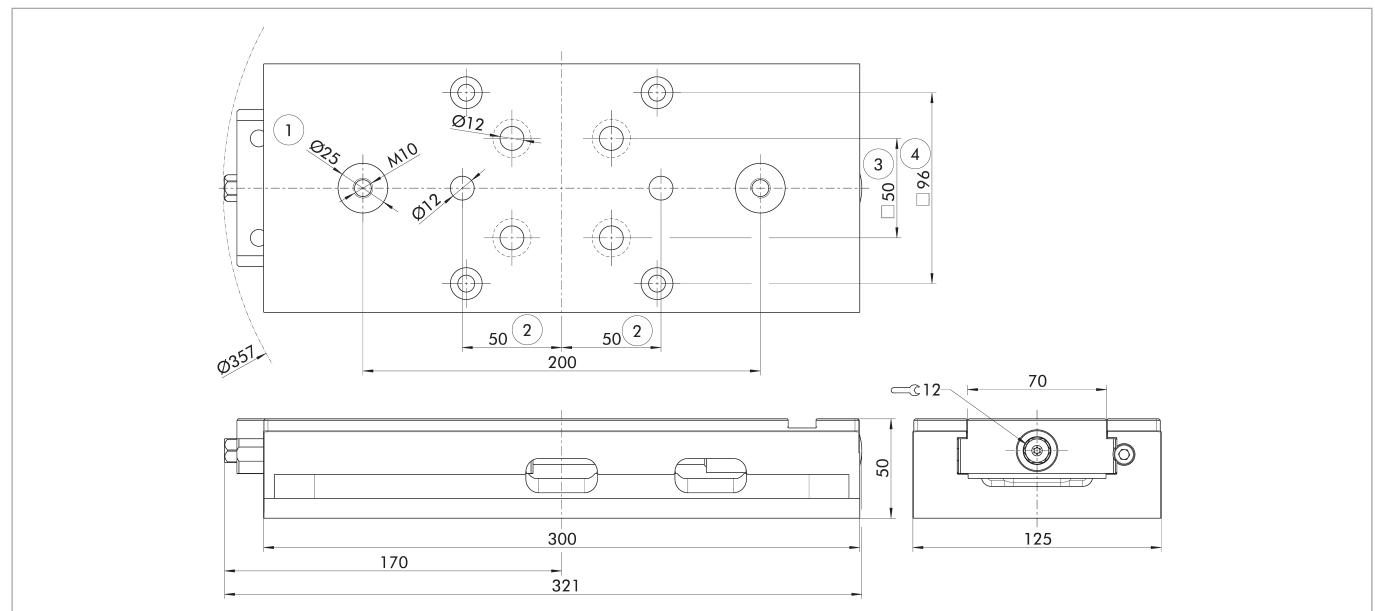

- ① Prepared for NSE3 and GFD clamping pins
- ② Prepared for alignment pins Ø 12m6
- ③ Prepared for M12 screws
- ④ Prepared for GFD-SP mini clamping pin Ø20 h6

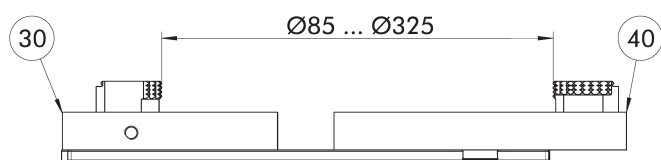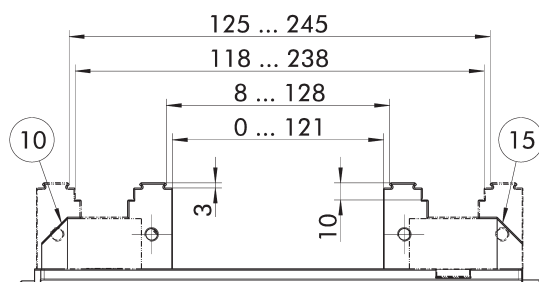

Suitable system jaws with position number on the next page.
Subject to technical changes.

- ① 6-way reversal grip jaw (ID 0430803), 6-way reversal carbide grip jaw (ID 1395550)

Technical data


Description	ID	Width of the clamping vise [mm]	Max. clamping force [kN]	Max. torque [Nm]	Weight [kg]
KSC3-K 160-280	1514292	160	50	175	21

Scope of delivery

Vise, operating manual; without system jaws


Suitable system jaws

Description	Pos.	Description	ID	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
Reversible grip jaw	10	SGWB-G3-B 160-81-50	0432614	160	81	50	3.4
Reversible grip jaw	15	SGWB-G3-F 160-81-50	0432624	160	81	50	3.2
Swivel plate	30	SGP-3 256-170-22	0432615	256	170	22	7.4
Adapter plate	40	SGA-4 256-125-22	0432621	256	125	22	5.4

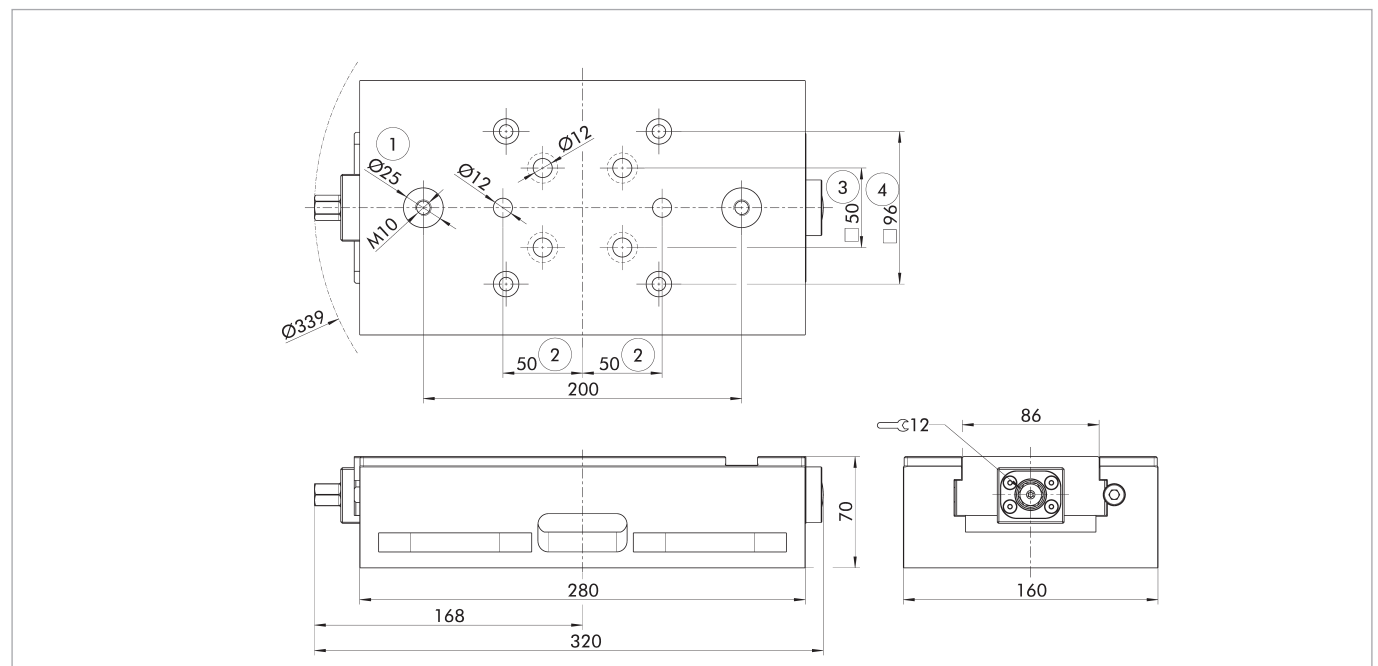

- ① Prepared for NSE3 and GFD clamping pins
- ② Prepared for alignment pins Ø 12m6

- ③ Prepared for M12 screws
- ④ Prepared for GFD-SP mini clamping pin Ø20 h6

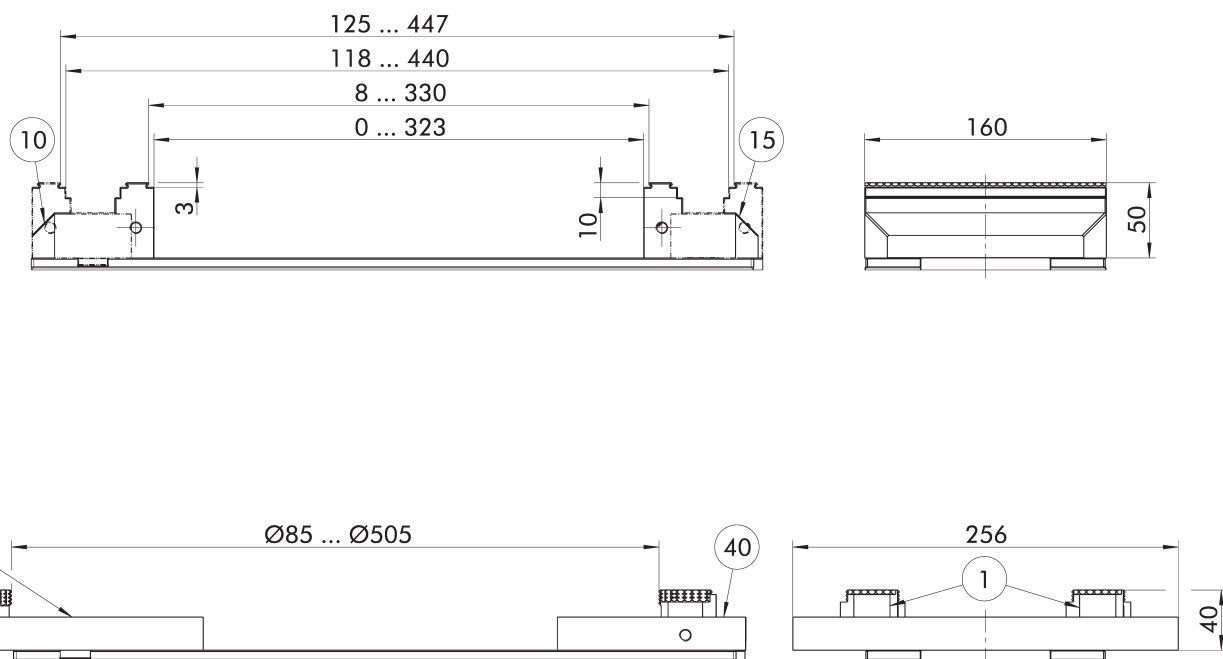

Suitable system jaws with position number on the next page.
Subject to technical changes.

- ① 6-way reversal grip jaw (ID 0430803), 6-way reversal carbide grip jaw (ID 1395550)

Technical data


Description	ID	Width of the clamping vise [mm]	Max. clamping force [kN]	Max. torque [Nm]	Weight [kg]
KSC3-K 160-480	1514297	160	50	175	35

Scope of delivery

Vise, operating manual; without system jaws

Suitable system jaws

Description	Pos.	Description	ID	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
Reversible grip jaw	10	SGWB-G3-B 160-81-50	0432614	160	81	50	3.4
Reversible grip jaw	15	SGWB-G3-F 160-81-50	0432624	160	81	50	3.2
Swivel plate	30	SGP-3 256-170-22	0432615	256	170	22	7.4
Adapter plate	40	SGA-4 256-125-22	0432621	256	125	22	5.4

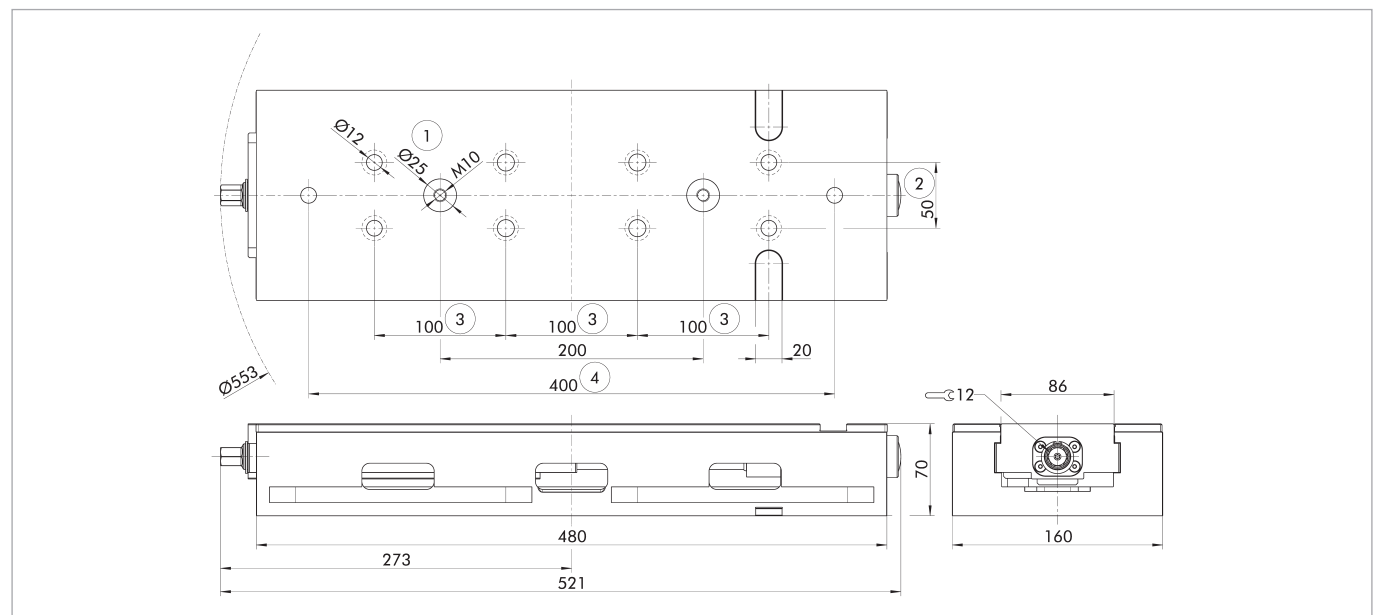

- ① Prepared for NSE3 and GFD clamping pins
② Grid dimension prepared for 6x screws M12 and 2x fitting screws M12
③ Prepared for 2x Ø 12m6 aligning pins

System jaws

Reversible grip jaw

Design as movable jaw.
With grip step 3 mm (up to 22 HRC) and a smooth clamping surface on both sides.



Suitable for	Description	Interface	ID
KSC3-K 80-130	SGWB-G3-B 80-40.3-28	W-80-1	0432715
KSC3-K 80-190			
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-G3-B 125-57-33		0432474
KSC3-K 160-280			
KSC3-K 160-480	SGWB-G3-B 160-81-50	W-160	0432614

Reversible grip jaw

Design as fixed jaw.
With grip step 3 mm (up to 22 HRC) and a smooth clamping surface on both sides.



Suitable for	Description	Interface	ID
KSC3-K 80-130	SGWB-G3-F 80-40.3-28	W-80-1	0432732
KSC3-K 80-190			
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-G3-F 125-57-33		1359848
KSC3-K 160-280			
KSC3-K 160-480	SGWB-G3-F 160-81-50	W-160	0432624

Reversible carbide-grip jaw

Design as movable jaw.
With carbide-grip step 3 mm (up to 58 HRC) and smooth clamping face on both sides.



Suitable for	Description	Interface	ID
KSC3-K 80-130	SGWB-CG3-B 80-40-28		1514368
KSC3-K 80-190			
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-CG3-B 125-57-33		1514374
KSC3-K 160-280			
KSC3-K 160-480	SGWB-CG3-B 160-81-50		1395527

Reversible carbide-grip jaw

Design as fixed jaw.
With carbide-grip step 3 mm (up to 58 HRC) and smooth clamping face on both sides.



Suitable for	Description	Interface	ID
KSC3-K 80-130	SGWB-CG3-F 80-40-28		1467016
KSC3-K 80-190			
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-CG3-F 125-57-33		1590610
KSC3-K 160-280			
KSC3-K 160-480	SGWB-CG3-F 160-81-50		1590611

Reversible jaw with embossed profile

Design as movable jaw.
With a special grip step on both sides for clamping pre-embossed workpieces simply and securely.



Suitable for	Description	Interface	ID
KSC3-K 125-160	SGWB-GL-B 125-57-33		1514378
KSC3-K 125-235			
KSC3-K 125-300			

Reversible jaw with embossed profile

Design as fixed jaw.
With a special grip step on both sides for clamping pre-embossed workpieces simply and securely.



Suitable for	Description	Interface	ID
KSC3-K 125-160	SGWB-GL-F 125-57-33		1627092
KSC3-K 125-235			
KSC3-K 125-300			

Reversible jaw

Design as movable jaw.
One side with grip step 3 mm (up to 22 HRC), one side height 40 mm with smooth clamping surface and threads for mounting top jaws.



Suitable for	Description	Interface	ID
KSC3-K 125-160	SGWB-G3-B 125-59-40	W-125-1	0430387
KSC3-K 125-235			
KSC3-K 125-300			

Reversible jaw

Design as fixed jaw.
One side with grip step 3 mm (up to 22 HRC), one side height 40 mm with smooth clamping surface and threads for mounting top jaws.



Suitable for	Description	Interface	ID
KSC3-K 125-160	SGWB-G3-F 125-59-40	W-125-1	1586742
KSC3-K 125-235			
KSC3-K 125-300			

Reversible grip jaw

Design as movable jaw.
Reduced jaw width.
With grip step 3 mm (up to 22 HRC) and a smooth clamping surface on both sides.



Suitable for	Description	Interface	ID
KSC3-K 80-130	SGWB-G3-B 40-40.3-28		1514379
KSC3-K 80-190			
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-G3-B 65-57-33		1514380
KSC3-K 125-300			

Reversible grip jaw

Design as fixed jaw.

Reduced jaw width.

With grip step 3 mm (up to 22 HRC) and a smooth clamping surface on both sides.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGWB-G3-F 40-40.5-28		1587365
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-G3-F 65-57-30		1587366

Aluminum jaw

Design as movable jaw.

Used for rework at the customer site e.g. for incorporating contours or special shapes.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGAL-B 80-48-28		0432718
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGAL-B 125-68-40		0432469
KSC3-K 160-280			
KSC3-K 160-480	SGAL-B 160-85-50		0432623

Aluminum jaw

Design as fixed jaw.

Used for rework at the customer site e.g. for incorporating contours or special shapes.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGAL-F 80-48-28		0432733
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGAL-F 125-68-40		0432492
KSC3-K 160-280			
KSC3-K 160-480	SGAL-F 160-85-50		0432625

Steel jaw

Design as movable jaw.

Used for rework at the customer site e.g. for incorporating contours or special shapes.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGS-B 80-48-28		1367467
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGS-B 125-68-40		1452569

Steel jaw

Design as fixed jaw.

Used for rework at the customer site e.g. for incorporating contours or special shapes.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGS-F 80-48-28		1561216
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGS-F 125-68-40		1559434

Swivel plate

Used – in combination with adapter plates and 6-way reversal jaws – to clamp bulky workpieces.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGP-3 125-76-19	W-38	0432720
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGP-3 180-95-22	W-38	0432470
KSC3-K 160-280			
KSC3-K 160-480	SGP-3 256-170-22	W-38	0432615

Adapter plate

Used – in combination with swivel plates and 6-way reversal jaws – to clamp bulky workpieces.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGA-4 125-48-19	W-38	0432735
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGA-4 180-62-22	W-38	0432493
KSC3-K 160-280			
KSC3-K 160-480	SGA-4 256-125-22	W-38	0432621

Reversible smooth jaw

Design as movable jaw.

Ground steps, for precise OP20 machining.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGWB-S8-B 80-40-28		1518693
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-S8-B 125-57-33		1518691

Reversible smooth jaw

Design as fixed jaw.
Ground steps, for precise OP20 machining.



Suitable for	Description	Interface	ID
KSC3-K 80-130			
KSC3-K 80-190	SGWB-S8-F 80-40-28		1518694
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SGWB-S8-F 125-57-33		1518692

5-axis jaw

Design as movable jaw.
One side with smooth clamping surface and threads for mounting top jaws.



Suitable for	Description	Interface	ID
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SG5A-B 125-44.5-33		1374778
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SG5A-B 125-45.5-40	W-125-1	0432472

5-axis jaw

Design as fixed jaw.
One side with smooth clamping surface and threads for mounting top jaws.




Suitable for	Description	Interface	ID
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SG5A-F 125-44.5-33		1374779
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	SG5A-F 125-45.5-40	W-125-1	1551488

Top jaws

6-way reversible jaws grip


With five grip steps as well as a coated clamping face.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBG-6W 38-38-18	38.5	18	38.2	W-38	0430803

6-way reversible jaw carbide grip

With five carbide grip steps as well as a smooth clamping face.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBCG-6W 38-38-18	38.5	18	38.2	W-38	1395550

Jaw profiled

For increasing the friction between jaw and workpiece without clamping impressions.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBD 125-40-11.5	125	40	11.5	W-125-1	1373349
GBD 160-50-13.5	160	50	13.5	W-160	1373350

Serrated jaw

For increasing the friction between jaw and workpiece with minimal clamping impressions.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBC 125-40-12.5	125	40	12.5	W-125-1	1373268
GBC 160-50-14.4	160	50	14.4	W-160	1373269

Ground jaw

With a completely ground clamping face.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBP 125-40-11.5	125	40	11.5	W-125-1	1373278
GBP 160-50-13.5	160	50	13.5	W-160	1373281

Soft jaw

Hardenable jaws for rework at the customer site, e.g. for incorporating contours or special shapes.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBW 125-40-20	125	40	20	W-125-1	1373288
GBW 160-50-20	160	50	20	W-160	1373289

Stepped jaw

With ground step, 8 mm.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS 125-40-11.5-8	125	40	11.5	W-125-1	1373327
GBS 160-50-13.5-8	160	50	13.5	W-160	1373328

Stepped jaw

With ground step, 17 mm.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS 125-40-11.5-17	125	40	11.5	W-125-1	0430413

Stepped jaw

With coated step, 5 mm.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-W 80-28-10-5	80	28	10	W-80-1	1395509
GBS-W 125-40-11.5-5	125	40	11.5	W-125-1	0430414
GBS-W 160-50-13.5-5	160	50	13.5	W-160	1395511

Stepped jaw

With grip step 3 mm and ground step 18 mm.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G3					
125-40-21.5-18	125	40	21.5	W-125-1	0430415
GBS-G3 125-40-24-18	125	40	24	W-125-1	1322989

Stepped jaw

With special "soft" grip step, 5 mm.
For embossed clamping of soft materials such as plastic or aluminum.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-SG5 125-40-11.5	125	40	11.5	W-125-1	1393552

Stepped jaw

With grip step, 3 mm.
For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G3 80-28-10	80	28	10	W-80-1	1326805
GBS-G3 125-40-11.5	125	40	11.5	W-125-1	1373331
GBS-G3 160-50-13.5	160	50	13.5	W-160	1373332

Stepped jaw

With grip step, 5 mm.
For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G5 125-40-11.5	125	40	11.5	W-125-1	1373334
GBS-G5 160-50-13.5	160	50	13.5	W-160	1373335

Stepped jaw

With grip step, 8 mm.
For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G8 125-40-11.5	125	40	11.5	W-125-1	1373338
GBS-G8 160-50-13.5	160	50	13.5	W-160	1373340

Stepped jaw

With carbide grip step, 3 mm.
For embossed clamping of hardened materials up to 58 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-CG3 125-40-11.5	125	40	11.5	W-125-1	1395524
GBS-CG3 160-50-13.5	160	50	13.5	W-160	1431232

Stepped jaw

With carbide grip step, 5 mm.
For embossed clamping of hardened materials up to 58 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-CG5 125-40-11.5	125	40	11.5	W-125-1	1424000
GBS-CG5 160-50-15.5	160	50	15.5	W-160	1431233

Stepped jaw

With special grip step, 3 mm.
For clamping pre-embossed materials and workpieces.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-GL3 125-40-11.5	125	40	11.5	W-125-1	1395577

Stepped jaw with T-slot

With grip step, 3 mm.
T-slot for mounting the positioning strip.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G3-T 125-40-17.5	125	40	17.5	W-125-1	0430248

Stepped jaw with T-slot

With grip step, 5 mm.
T-slot for mounting the positioning strip.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G5-T 125-40-17.5	125	40	17.5	W-125-1	0430247
GBS-G5-T 160-50-20	160	50	20	W-160	0430250

Stepped jaw with T-slot

With grip step, 8 mm.
T-slot for mounting the positioning strip.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G8-T 125-40-17.5	125	40	17.5	W-125-1	0430237
GBS-G8-T 160-50-20	160	50	20	W-160	0430249

Positioning bar

To suit all stepped jaws with T-slot.



Description	Width mm	Height mm	Depth mm	Interface	ID
GPL 125-32-13.5	125	32	13.5	W-125-1	0430238
GPL 160-32-13.5	160	32	13.5	W-160	0430251

Grip jaw

For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBG 125-40-11.5	125	40	11.5	W-125-1	1373284
GBG 160-50-13.5	160	50	13.5	W-160	1373285

Chuck jaw with locating pins

Retractable locating pins for quickly adjusting the jaw to the respective workpiece.



Description	Width mm	Height mm	Depth mm	Interface	ID
GPS 125-40-17	125	40	16.7	W-125-1	1509316

Prism jaw, ground


For precise clamping of round workpieces.
100 = Ø11 - Ø41 mm.
125 = Ø14 - Ø48 mm.
160 = Ø16 - Ø60 mm.



Description	Width mm	Height mm	Depth mm	Interface	ID
GVA 125-40-17.5	125	40	17.5	W-125-1	1373344
GVA 160-50-19.5	160	50	19.5	W-160	1373345

Spring leaf pull-down jaw

For an active jaw pull-down function with a light clamping impression on the workpiece for more precise machining results.



Description	Width mm	Height mm	Depth mm	Interface	ID
GFA 125-40-11.5	125	40	11.5	W-125-1	1373304
GFA 160-50-13.5	160	50	13.5	W-160	1373306

Spring plate pull-down jaw

For an active jaw pull-down function without clamping impressions on the workpiece for more precise machining results.



Description	Width mm	Height mm	Depth mm	Interface	ID
GFB 80-24-9	80	24.3	9	W-80-1	0432736
GFB 125-39-10	125	39	10	W-125-1	0430192
GFB 160-45-12	160	45	12	W-160	0432629

Precision pull-down jaw

For an active jaw pull-down function without clamping impressions on the workpiece for more precise machining results.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBN-P 125-40-25	125	40	25	W-125-1	0430147
GBN-P 160-50-27.5	160	50	27.5	W-160	0430148

Universal stepped jaw

Versatile stepped jaw with ground step.



Description	Width mm	Height mm	Depth mm	Interface	ID
GPE 80-28-10-5	80	28	10	W-80-1	0432721

Accessories

Clamping force tester

For measuring the jaw clamping force of stationary clamping devices.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	IFT SST Set	1475766

Clamping pin GFD-SP mini

Clamping pin for form-fit connection of GFD mini set-up systems with clamping devices from SCHUNK.

1 set = 4 pieces.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160	GFD-SP mini Ø16 h6	1561291
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280	GFD-SP mini Ø20-h6	1602023

Standard clamping pins

Clamping pin for positive connection with NSE3 clamping modules.
With shortened fastening screw.



Suitable for	Description	ID
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	SPA 40-K	0432369
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	SPB 40-K	0432370

Indexing pin

Used as an anti-rotation protection for VERO-S modules with anti-rotation protection V1.



Suitable for	Description	ID
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235	IXB V1-K	0432371

Clamping pin GFD-SP

Clamping pin for positive connection with GFD set-up stations.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GFD-SP 40	0433600

Indexing pin GFD

Indexing pins for position orientation of clamping pallets and clamping devices on GFD set-up stations.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235	GFD-IXB	1367937

Torque wrench 10 - 100 Nm

Serves for applying a defined torque.
With 1/2" square drive



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300	GSH-D 10-100	0432477

Torque wrench 20 - 200 Nm

Serves for applying a defined torque.
With 1/2" square drive



Suitable for	Description	ID
KSC3-K 160-280		
KSC3-K 160-480	GSH-D 20-200	0432487

Actuating lever, articulated

For convenient clamping range presetting
With 1/2" square drive



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GSH-G 1/2"	0432478

Hexagonal insert SW 12

Suitable for square drive 1/2".



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300	GSK-I SW12-1/2"	0432479

Hexagonal insert SW 14

Suitable for square drive 1/2".



Suitable for	Description	ID
KSC3-K 160-280		
KSC3-K 160-480	GSK-I SW14-1/2"	0432619

Sealing plug

For thread in the base body.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GVSS M10x12	1323002

Workpiece stop

Workpiece stop with minimum space requirements and continuously adjustable stop slide.
Including stop slider 40 and 80 mm.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GWSA M8-23	1645258

Magnetic workpiece stop, small

For quick and easy attachment to system jaws or vises.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GWSA-M 60 x 15	1391293

Magnetic workpiece stop, large


For quick and easy attachment to system jaws or vises.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GWSA-M 115 x 15	1391331

Extensions

As an accessory for the magnetic workpiece stops.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GWSA-V Ø68 x 30	1394477

Clamping screws for clamping claws

Used in combination with clamping claws for fastening clamping devices.



Suitable for	Description	T-slot	ID
KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-S M10-T12	12 mm/M10	0432043
KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-S M12-T14	14 mm/M12	0432044
KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-S M14-T16	16 mm/M14	0432045
KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-S M16-T18	18 mm/M16	0432046
KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-S M16-T20	20 mm/M16	1550423
KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-S M16-T22	22 mm/M16	1550424

Clamping screws for base body

Used for directly attaching clamping devices via the base body.



Suitable for	Description	T-slot	ID
KSC3-K 80-130 KSC3-K 80-190 KSC3-K 125-160 KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-G-1 M10-T12	12 mm/M10	0430422
KSC3-K 80-130 KSC3-K 80-190 KSC3-K 125-160 KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-G-1 M12-T14	14 mm/M12	0430423
KSC3-K 80-130 KSC3-K 80-190 KSC3-K 125-160 KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-G-1 M12-T16	16 mm/M12	0430424
KSC3-K 80-130 KSC3-K 80-190 KSC3-K 125-160 KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GSC-G-1 M12-T18	18 mm/M12	0430425

Fitting screws

For precise position orientation and mounting of manual clamping vises on the machine table.



Suitable for	Description	ID
KSC3-K 125-160 KSC3-K 125-235 KSC3-K 125-300 KSC3-K 160-280 KSC3-K 160-480	GPSC-2 Ø12f7-M12	0490546

Alignment and centering set

For quick and easy alignment and fastening on T-slot tables.



Suitable for	Description	T-slot	ID
KSC3-K 125-300 KSC3-K 160-280	GAZ-3 T12	12 mm	0430418
KSC3-K 125-300 KSC3-K 160-280	GAZ-3 T14	14 mm	0430419
KSC3-K 125-300 KSC3-K 160-280	GAZ-3 T16	16 mm	0430420
KSC3-K 125-300 KSC3-K 160-280	GAZ-3 T18	18 mm	0430421

Cylinder pin set


For easier assembly of the clamping device on the machine table.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GZS Ø12m6	1373755

Clamping claws

For quick and easy mounting of SCHUNK clamping devices.



Suitable for	Description	ID
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GSPR-A 50-57	0490604

Cover screw

Used to cover unused clamping insert mounting holes on pendulum and adapter plates.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190		
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300		
KSC3-K 160-280		
KSC3-K 160-480	GCS Ø22-M12	1307880

Workpiece Supports Set

Set of workpiece supports – width 80 mm

Suitable for system jaws H = 28 mm with grip level 3 mm.
Heights = 5, 10, 15, 20, and 22 mm.



Suitable for	Description	ID
KSC3-K 80-130		
KSC3-K 80-190	GWU-S grip 80-28	1394225

Set of workpiece supports – width 125 mm

Suitable for system jaws H = 33 mm with grip level 3 mm.
Heights = 8, 12, 20, 25, and 27 mm.



Suitable for	Description	ID
KSC3-K 125-160		
KSC3-K 125-235		
KSC3-K 125-300	GWU-S grip 125-33	1394227

Set of workpiece supports – width 160 mm

Suitable for system jaws H = 50 mm.
Heights = 15, 30, 40, 45, and 47 mm.



Suitable for	Description	ID
KSC3-K 160-280		
KSC3-K 160-480	GWU-S 160-50	1394231

Workpiece supports

Workpiece supports – width 80 mm

In different heights.

1 Set = 2 pieces



Suitable for	Description	Height mm	ID
KSC3-K 80-130			
KSC3-K 80-190	GWU-M 80-5	5	1465960
KSC3-K 80-130			
KSC3-K 80-190	GWU-M 80-10	10	1465956
KSC3-K 80-130			
KSC3-K 80-190	GWU-M 80-15	15	1460327
KSC3-K 80-130			
KSC3-K 80-190	GWU-M 80-20	20	1411113
KSC3-K 80-130			
KSC3-K 80-190	GWU-M 80-22	22	1411114

Workpiece supports – width 125 mm

In different heights.

1 Set = 2 pieces



Suitable for	Description	Height mm	ID
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-8	8	1450266
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-9	9	1462567
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-10	10	1411328
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-12	12	1447369
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-15	15	1411350
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-20	20	1452308
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-22	22	1457551
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-23	23	1411380
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-25	25	1484475
KSC3-K 125-160			
KSC3-K 125-235			
KSC3-K 125-300	GWU-M 125-27	27	1461008

Workpiece supports – width 160 mm

In different heights.

1 Set = 2 pieces



Suitable for	Description	Height mm	ID
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-15	15	1464957
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-22	22	1461402
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-30	30	1538303
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-37	37	1443672
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-40	40	1504993
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-41	41	1597020
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-42	42	1410170
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-43	43	1534944
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-44	44	1484499
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-45	45	1410169
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-46	46	1497132
KSC3-K 160-280			
KSC3-K 160-480	GWU-M 160-47	47	1410166



**H.-D. SCHUNK GmbH & Co.
Spanntechnik KG**

Lothringer Str. 23
D-88512 Mengen
Tel. +49-7572-7614-1300
Fax +49-7572-7614-1039
CMM@de.schunk.com
schunk.com