



Hand in hand for tomorrow



Product data sheet

Feed-through modules COS R12

Robust. Reliable. Flexible.

Optional modules COS

Optional modules for feeding through different media such as electrical signals, pneumatics, fluids and vacuum.

Field of application

For fast media transfer with short change-over times between change master and change adapter in order to supply the end effector with the required media.

Advantages – Your benefits

Fits perfectly for easy combination with SCHUNK tool changers

Wide range of different variants for feeding through of various media

Module variety the appropriate module for the required media transfer for every size of SCHUNK tool changers

Connector variants with radial, axial, and side cable outlet for a low interfering contour in restricted spaces

Combination of several optional modules for maximum flexibility of the tool changer

Minimum wear for a high number of change cycles and a long service life

Customer-specific designs available on request the suitable solution for any application

Cable connector, cable extensions and protection covers available on request for a comprehensive complete solution from one source



Application example



① Automatic tool changers CPS

③ Modular storage rack CTS

⑤ 2-finger parallel gripper JGP-P

② Optional modules COS

④ Universal gripper EGU

SCHUNK offers more ...

The following components make the product even more productive – the suitable addition for the highest functionality, flexibility, reliability, and controlled production.



Tool changer



Manual change system



Pallet change system

① For more information on these products can be found on the following product pages or at [schunk.com](https://www.schunk.com).

Overview of optional modules and mounting pattern

	COS	S1	S7	K	J	L	L1	L2
Optional modules for								
Signal								
Power								
Servo								
Communication								
Welding								
Pneumatics								
Vacuum								
liquids								
Hydraulics								
S1 screw connection diagram suitable for								
CPS 001								
S7 screw connection diagram suitable for								
CPS 007								
CPS 011								
K screw connection diagram suitable for								
CPS 020								
CPS 021 side A								
CPS 060 side A								
J screw connection diagram suitable for								
CPS 021 side B with adapter plate								
CPS 029								
CPS 040								
CPS 041								
CPS 046								
CPS 060 side B with adapter plate								
CPS 071								
CPS 076								
CPS 110								
CPS 160								
L screw connection diagram suitable for								
CPS 210 mounting surfaces B, C, D								
CPS 310 mounting surfaces B, C, D								
CPS 510 mounting surfaces B, C, D								
L1 screw connection diagram suitable for								
CPS 210 mounting surface A								
L2 screw connection diagram suitable for								
CPS 310 mounting surface A								
CPS 510 mounting surface A								

Special designs with modified seals or lubrication are available on request

COS R12


Feed-through modules



Technical data

Description		COS R12-K	COS R12-A
ID		1586438	1586432
Suitable on		Change head	Tool
Screw connection diagram		J	J
Transmission type		Signal	Signal
Weight	[kg]	0.11	0.1
Min./max. ambient temperature	[°C]	5/60	5/60
Protection class IP		IP64 (only in a coupled state)	IP64 (only in a coupled state)
Number of pin contacts		12	12
Nominal current	[A]	2	2
Alternating voltage	[V AC]	30	30
Direct voltage	[V DC]	30	30
Electrical connection		M12 connector, A-coded, 12-pin	M12 socket, A-coded, 12-pin
Outlet connection		radial	radial


Combination COS R12-K and COS R12-A

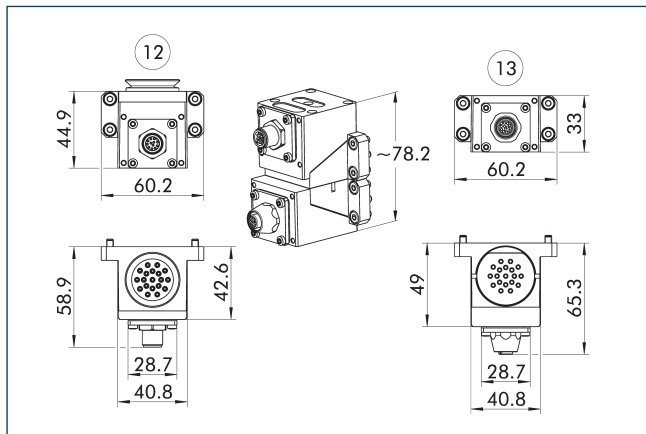

12 Master side

13 Adapter side

Pin assignment for COS R12-K with COS R12-A

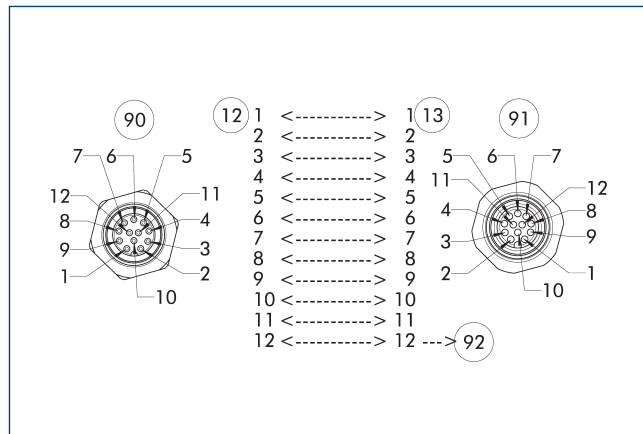

12 Master side


13 Adapter side

90 M12 connector, A-coded, 12-pin

91 M12 socket, A-coded, 12-pin

92 leading pin

Cover COS JPC-A

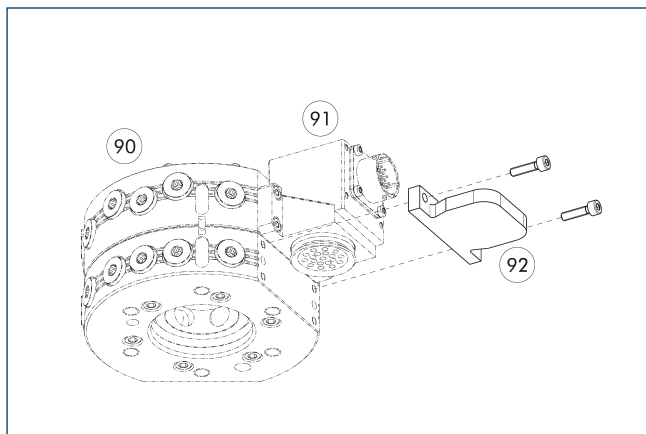


90 Automatic tool changers CPS

92 Cover COS JPC-A

91 Optional module COS master

Description	ID	Suitable for
Cover		
COS JPC-A	1584095	For many electrical modules with screw-on pattern J

Cable plug/cable extension

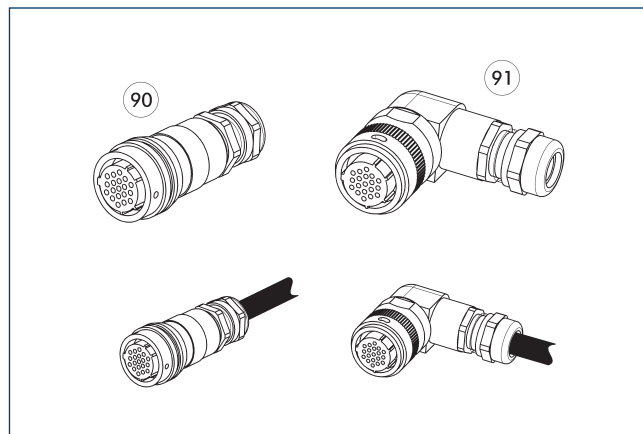

90 Plug/socket straight

91 Connector/angled socket

Other cable lengths on request.

Description	ID	
Cable extension		
KA BG12-L 12P-0500	1324328	
KA BW12-L 12P-0500	1439564	
KA SG12-L 12P-0500	1324332	
KA SW12-L 12P-0500	1439565	



SCHUNK SE & Co. KG

Spanntechnik

Greiftechnik

Automatisierungstechnik

Bahnhofstr. 106 - 134

D-74348 Lauffen/Neckar

Tel. +49-7133-103-0

Fax +49-7133-103-2399

info@de.schunk.com

schunk.com

Folgen Sie uns | *Follow us*

