


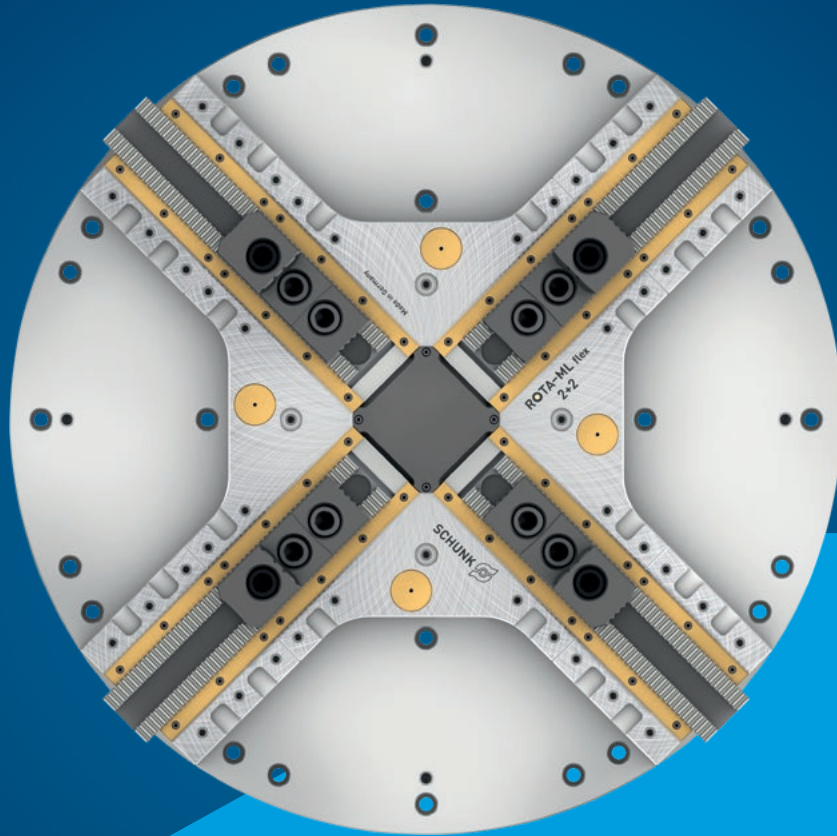


ROTA-ML *flex* 2+2

**Universal manual lathe chuck
for all clamping tasks on
lathes and milling machines**

Centrically compensating workpiece clamping of any workpiece geometry

Clamping of round, cubic and geometrically unshaped parts – no problem for the ROTA-ML flex 2+2. Thanks to the patented drive concept with coupled jaw pairs, any workpiece geometry can be clamped centrically and without overdetermination. The chucks are used in particular in storage solutions and on mill/turn machines, but can also be used on lathes. The chuck weights of the large chucks with $\varnothing$ 500 mm or more have been reduced by up to 40% compared to the previous version, so that an even higher workpiece weight can be loaded.

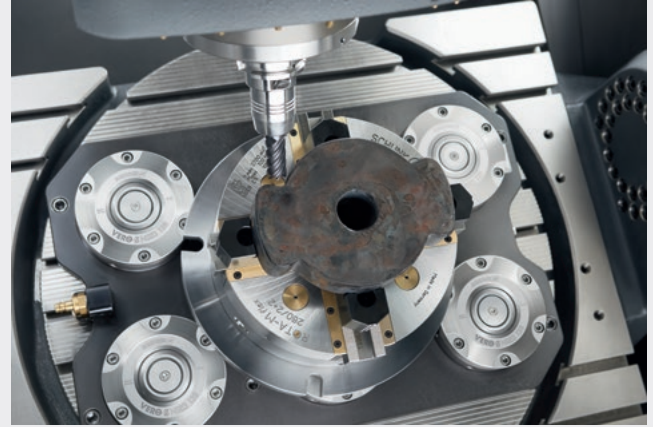

Advantages – Your benefits


- + Sealed manual lathe chuck**
For significantly longer maintenance intervals
- + Patented drive concept**
Independent installation of the jaw pairs with subsequent centrically compensating workpiece clamping
- + Flexible clamping system**
For clamping round, cubic, or geometrically bulky workpieces
- + Compensation mechanism**
Enables centric clamping of any workpiece geometries
- + Optimized chuck heights and weights for the new ROTA-ML flex 2+2 versions from $\varnothing$ 500 mm**
For a maximum additional payload of workpiece weight
- + High efficiency of the wedge bar system**
Process-reliable clamping due to high clamping forces
- + Lubrication system with grease circulation**
Ensures permanent grease supply for constant clamping forces
- + Visual clamping release**
As an indicator for the range in which safe clamping can be ensured
- + All sides of the functional parts are hardened and ground**
Ensures a long service life

Technical data

Description	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]
ROTA-M flex 2+2 260	2700	100	120	9.5	5.1
ROTA-M flex 2+2 315	2200	100	120	9.5	5.1
ROTA-M flex 2+2 400	1500	150	200	14.5	7.9
ROTA-M flex 2+2 500	1500	180	210	17.3	12
ROTA-ML flex 2+2 500	1500	180	210	17.3	12
ROTA-ML flex 2+2 630	1300	180	210	17.3	12
ROTA-ML flex 2+2 800	1100	180	210	17.3	12
ROTA-ML flex 2+2 1000	850	180	210	17.3	12
ROTA-ML flex 2+2 1200	750	180	210	17.3	12

Function ROTA-ML flex 2+2

A patented drive ring system transfers the rotary motion of the threaded spindle onto the jaws. The opposing pairs of jaws contact the workpiece one after the other and center it in the corresponding plane. The workpiece is then clamped evenly at full clamping force.

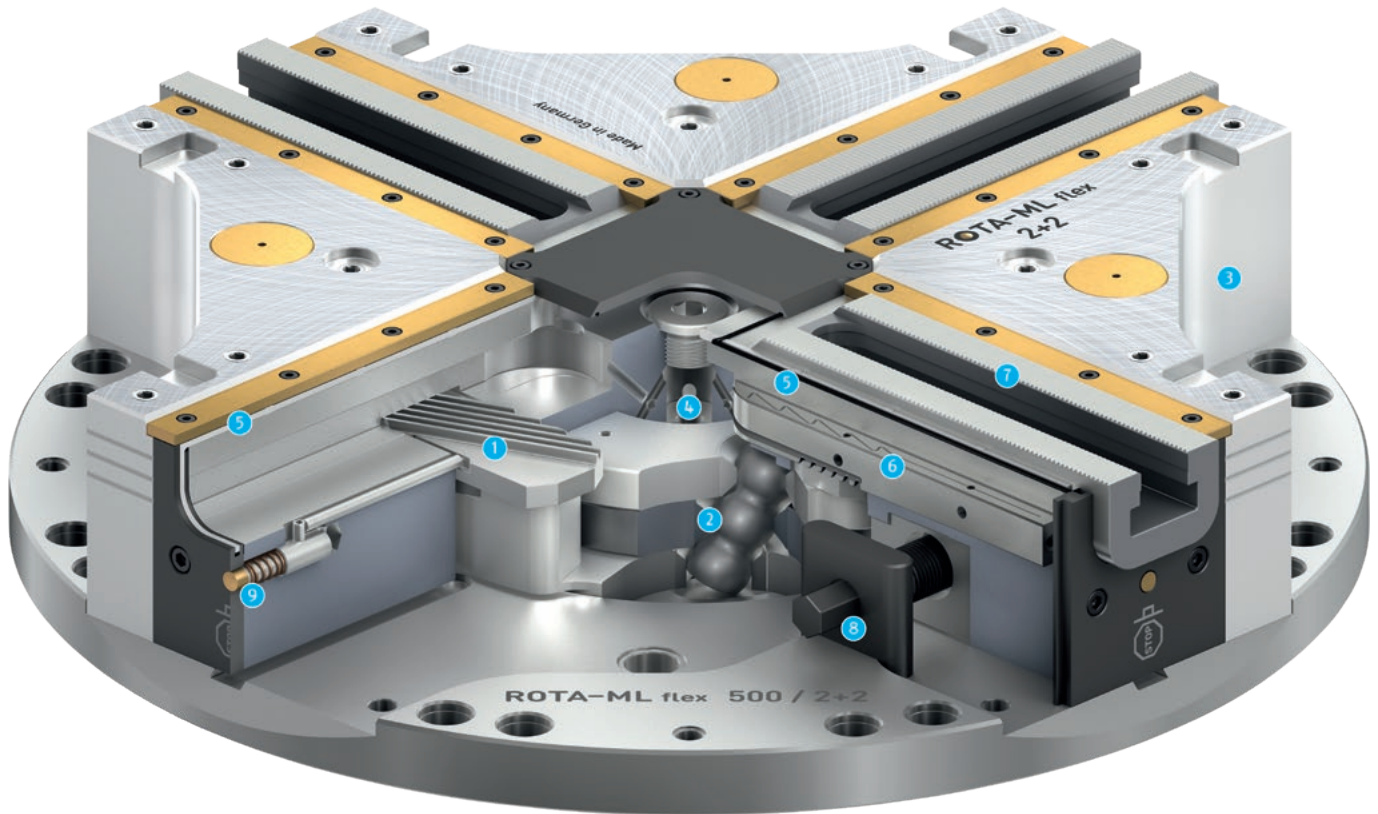


- | | |
|---|---|
| <p>1 Wedge bar actuation system
Offers high run-out accuracies</p> <p>2 Patented drive concept
As a basis for centrally compensating workpiece clamping</p> <p>3 Hardened and extremely rigid base body
Therefore a longer service life at highest precision. Even with maximum clamping force</p> <p>4 Central lubrication system with grease reservoir
Provides sufficient grease during machining. The actuation as well as the centrifugal force during machining also ensure that the grease is circulated in the chuck.</p> | <p>5 Sealing of the lathe chuck
Consists of a gasket and O-rings for the initial tension</p> <p>6 Long jaw guidance
Offers optimal support for O.D.- and I.D. clamping</p> <p>7 Standard jaw interface
For the use of standard top jaws from SCHUNK</p> <p>8 Actuation via hexagon connection
This ensures easy operation</p> <p>9 Indicator pin
For monitoring the jaw position via drive ring movement</p> |
|---|---|

Compensating workpiece clamping


Due to the innovative drive concept, round, cubic and geometrically unshaped workpieces can be clamped in a compensating manner. The opposing jaws are always connected to each other via a drive ring system. Overdetermination is prevented by the compensation mechanism.

- ❶ First pair of jaws
- ❷ Second pair of jaws

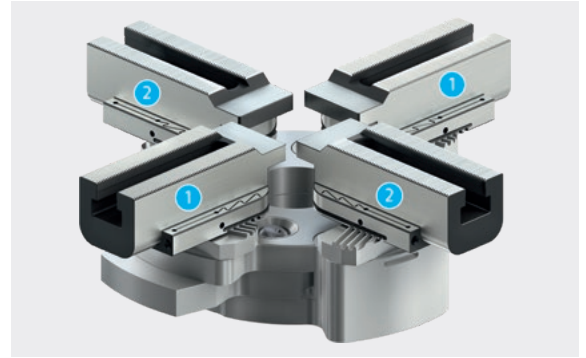

Sealed manual lathe chuck

A sealing system consisting of a pre-loaded gasket and O-rings and prevents grease from being flushed out during machining and the penetration of dirt or chips. This means that cast or forged parts can also be machined without hesitation.

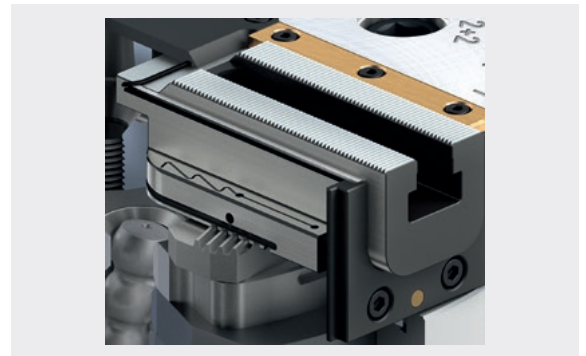

Visual clamping release


To ensure safe working, an indicator pin shows when the chuck mechanism is close to the stroke end position. As soon as the indicator pin moves outwards, the workpiece is no longer clamped correctly and machining must not be started.

- ❶ Indicator pin



Stationary version


From size $\varnothing$ 500 the ROTA-ML flex 2+2 is designed in an extremely weight-reduced monolithic design, and is now even flatter. As a result, a weight reduction of up to 60% can be achieved compared to conventional chucks of the same size.

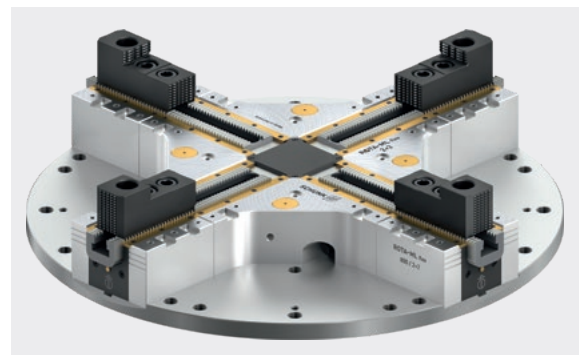

2-jaw clamping

The ROTA-ML flex 2+2 can be converted from a 4-jaw chuck into a 2-jaw chuck with one simple adjustment. All you have to do is to exchange the central locking cover.


- ❶ **Locking cover without stop**
Both pairs of jaws can be moved freely
- ❷ **Locking cover with stop**
One pair of jaws is blocked, the other one clamps centrally

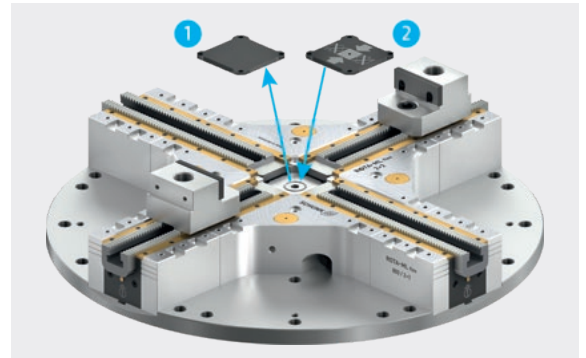


Versatile mounting options

With the new ROTA-ML flex 2+2, additional mounting options have been incorporated into the base plate. This means that the lathe chucks can be used even more flexibly on the machine tables of the individual machine manufacturers.

- ❶ **22.5° star slot**
For up to 16 radial T-slots
- ❷ **30° star slot**
For up to 12 radial T-slots
- ❸ **45° star slot**
For up to 8 radial T-slots

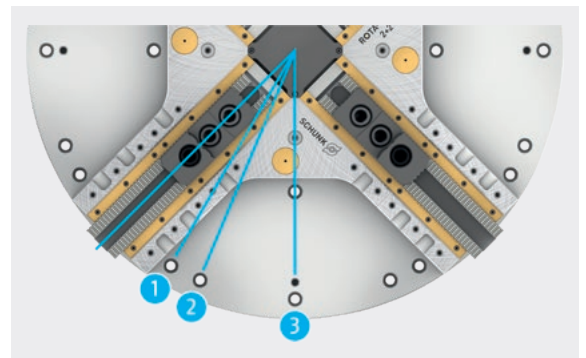

Significant weight reduction in the new generation ROTA-ML flex 2+2

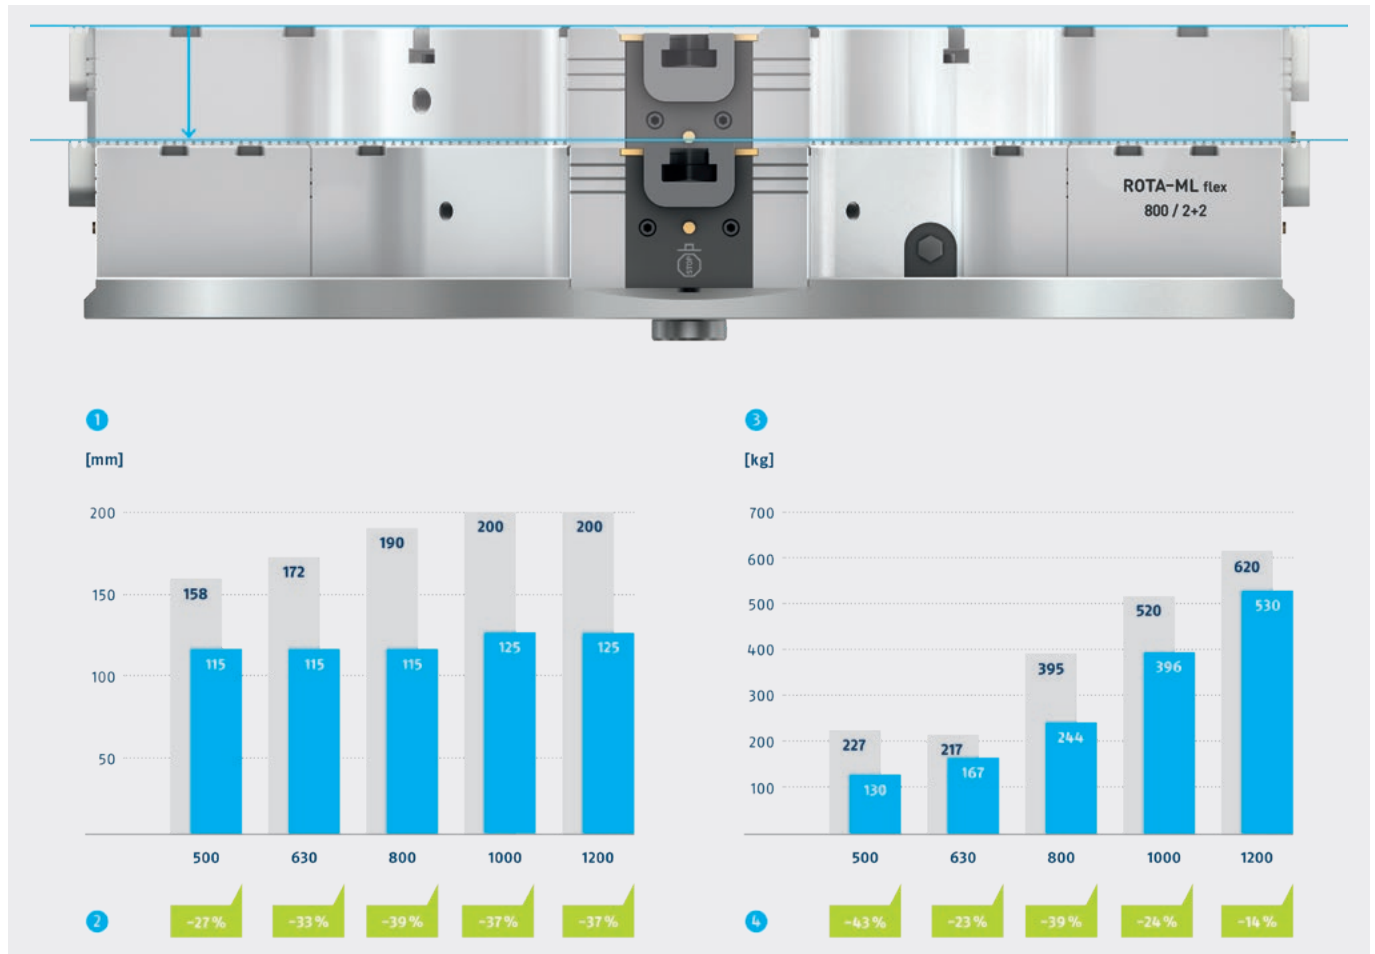

The large sizes of the ROTA-ML flex 2+2 from Ø 500 mm have undergone a complete facelift. The main focus has been on reducing the overall height and the associated reduction in chuck weight. Thanks to design modifications, the chuck height has been significantly reduced and the weight has been cut by as much as 40% compared to its predecessor. This means that even larger and heavier workpieces can now be processed. Another positive side effect of the weight reduction is that higher table speeds are now possible due to the lower mass.

1 Height comparison

x-axis = size of the chuck
y-axis = height of the chuck

2 Saving

In chuck height from the old to the new generation


3 Weight comparison

x-axis = size of the chuck
y-axis = weight of the chuck

4 Saving

In chuck weight from the old to the new generation


Highest flexibility

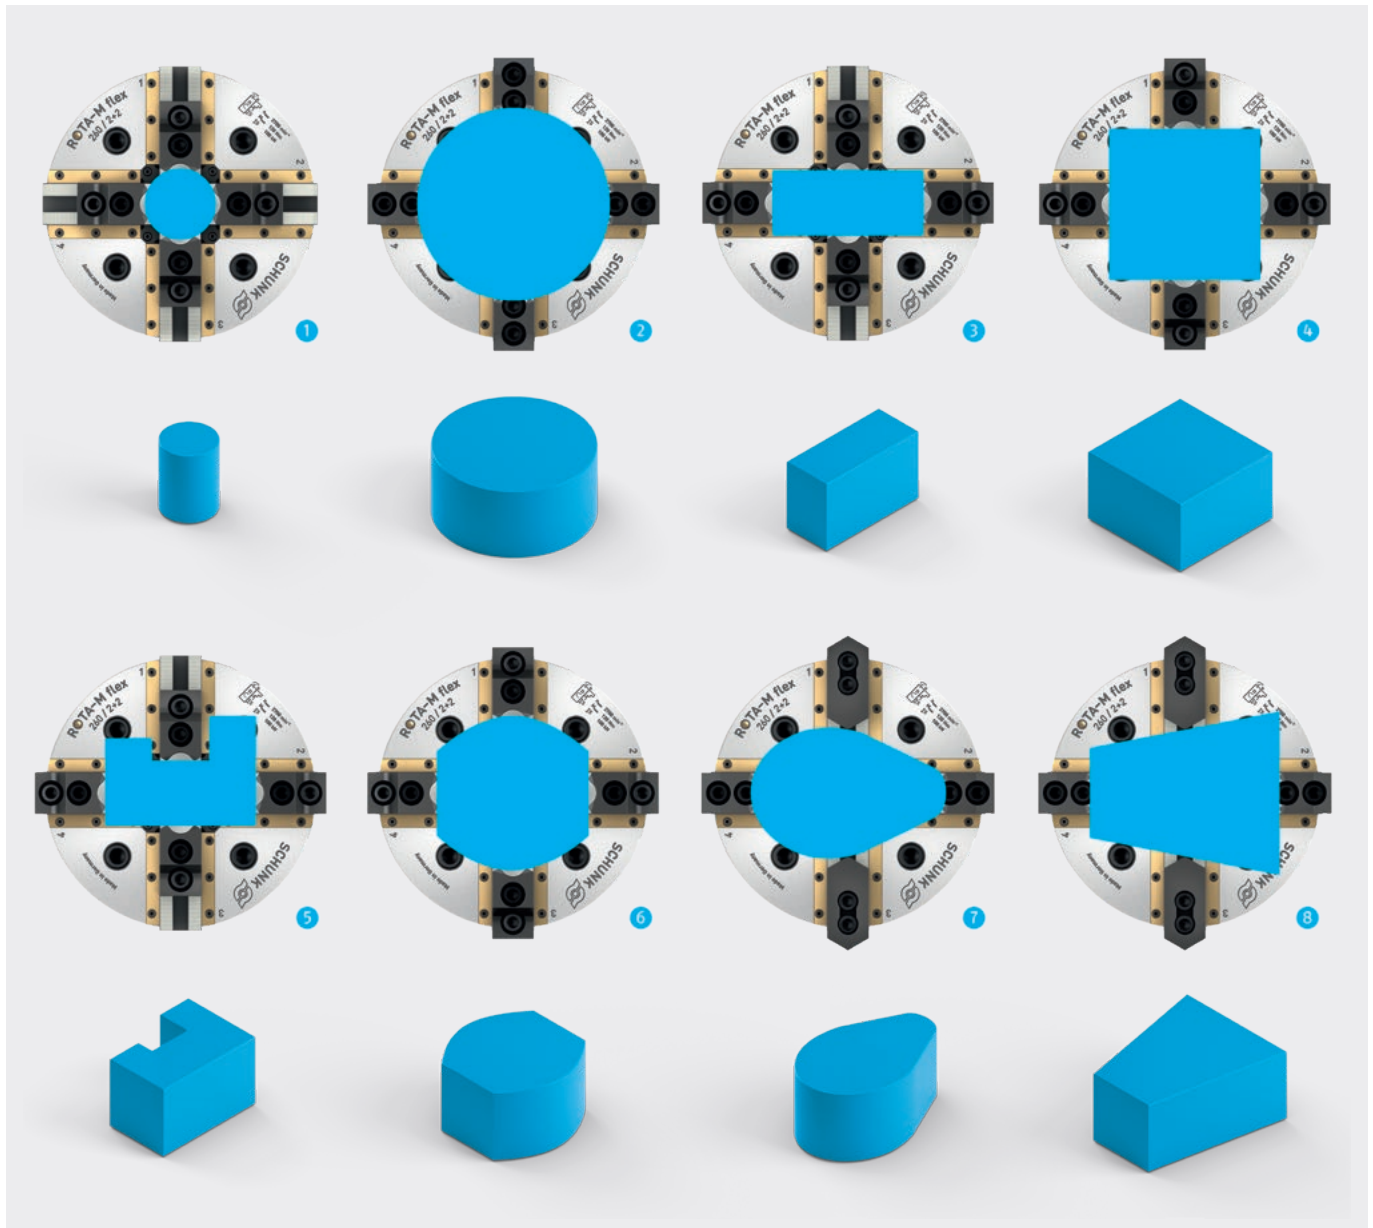

The ROTA-ML flex 2+2 is impressive due to its high degree of flexibility. With this centrally compensating manual lathe chuck, there is virtually no workpiece that cannot be clamped with it. With a selection of proper top jaws, round, cubic and a variety of geometrically unshaped parts can be clamped.

- ① Small workpieces
- ② Large workpieces
- ③ Rectangular workpieces
- ④ Square workpieces
- ⑤ Free-form parts
- ⑥ Semicircular and angular workpieces
- ⑦ Cams
- ⑧ Inclined workpieces

Console clamping

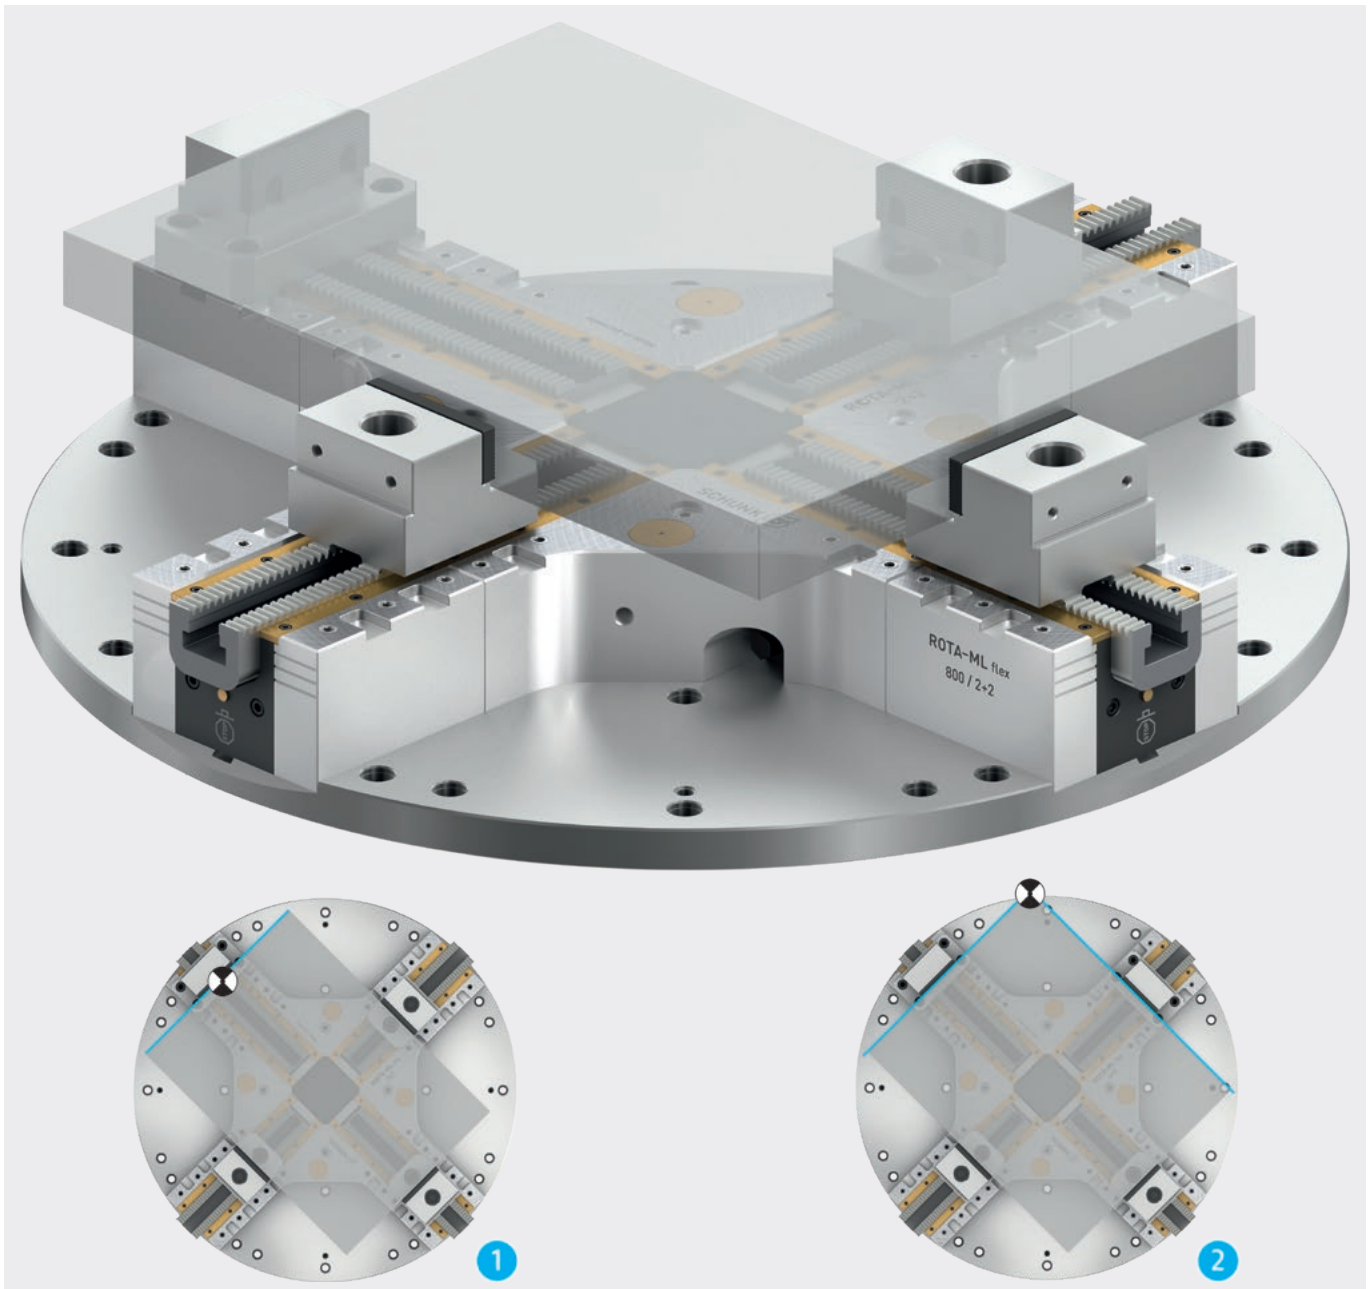

If one or two fixed zero points are required on mill/turn centers instead of centric compensating clamping, the ROTA-ML flex 2+2 can be converted into a "fixed jaw clamping vise" using special jaws. Via grooves in the chuck face, the fixed jaws can be connected to the chuck. The result is a defined, repeatable zero point, which is particularly important for precise OP20 machining.

1 Clamping against a fixed jaw

The workpiece is clamped against a fixed jaw. As a result, this one jaw forms the precise zero point in a plane.

Attention: With this set-up, the clamping force is reduced by 25% compared to the maximum clamping force specified for the chuck.

2 Clamping against two fixed jaws

The workpiece is clamped against two fixed jaws. The two fixed stops form the precise zero point at the intersection of the two stop lines.


With this set-up, the maximum clamping force of the chuck is maintained.

ⓘ Attention: Fixed stops are not intended for use under rotation!

Functionality: Compensating workpiece clamping


Step 1: Insert the workpiece

Round, cubic or geometrically unshaped parts can be inserted in open state.

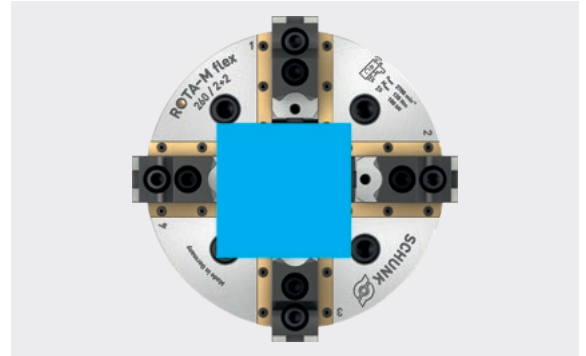


Step 2: Install the first pair of jaws

By actuating the manual lathe chuck, the first pair of jaws contacts the workpiece. The workpiece is now centered in this plane.

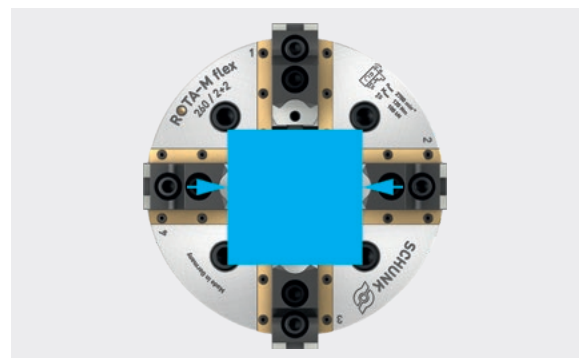


Step 3: Install the second pair of jaws


During further actuation, the second pair of jaws also contacts the workpiece and moves the workpiece in this plane to the center.

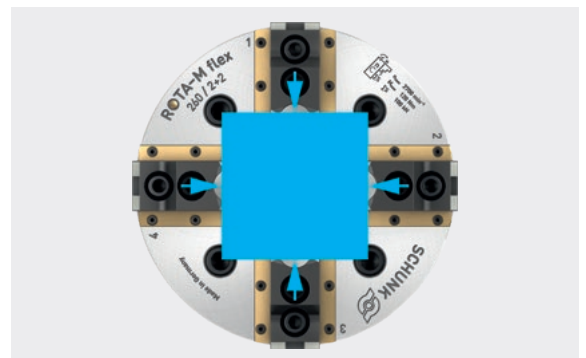

Step 4: Clamp the workpiece

If both pairs of jaws are in contact with the workpiece, the workpiece is clamped evenly and centrally with the full clamping force (depending on the torque).

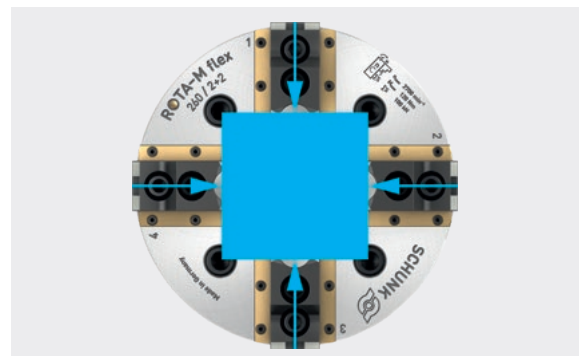

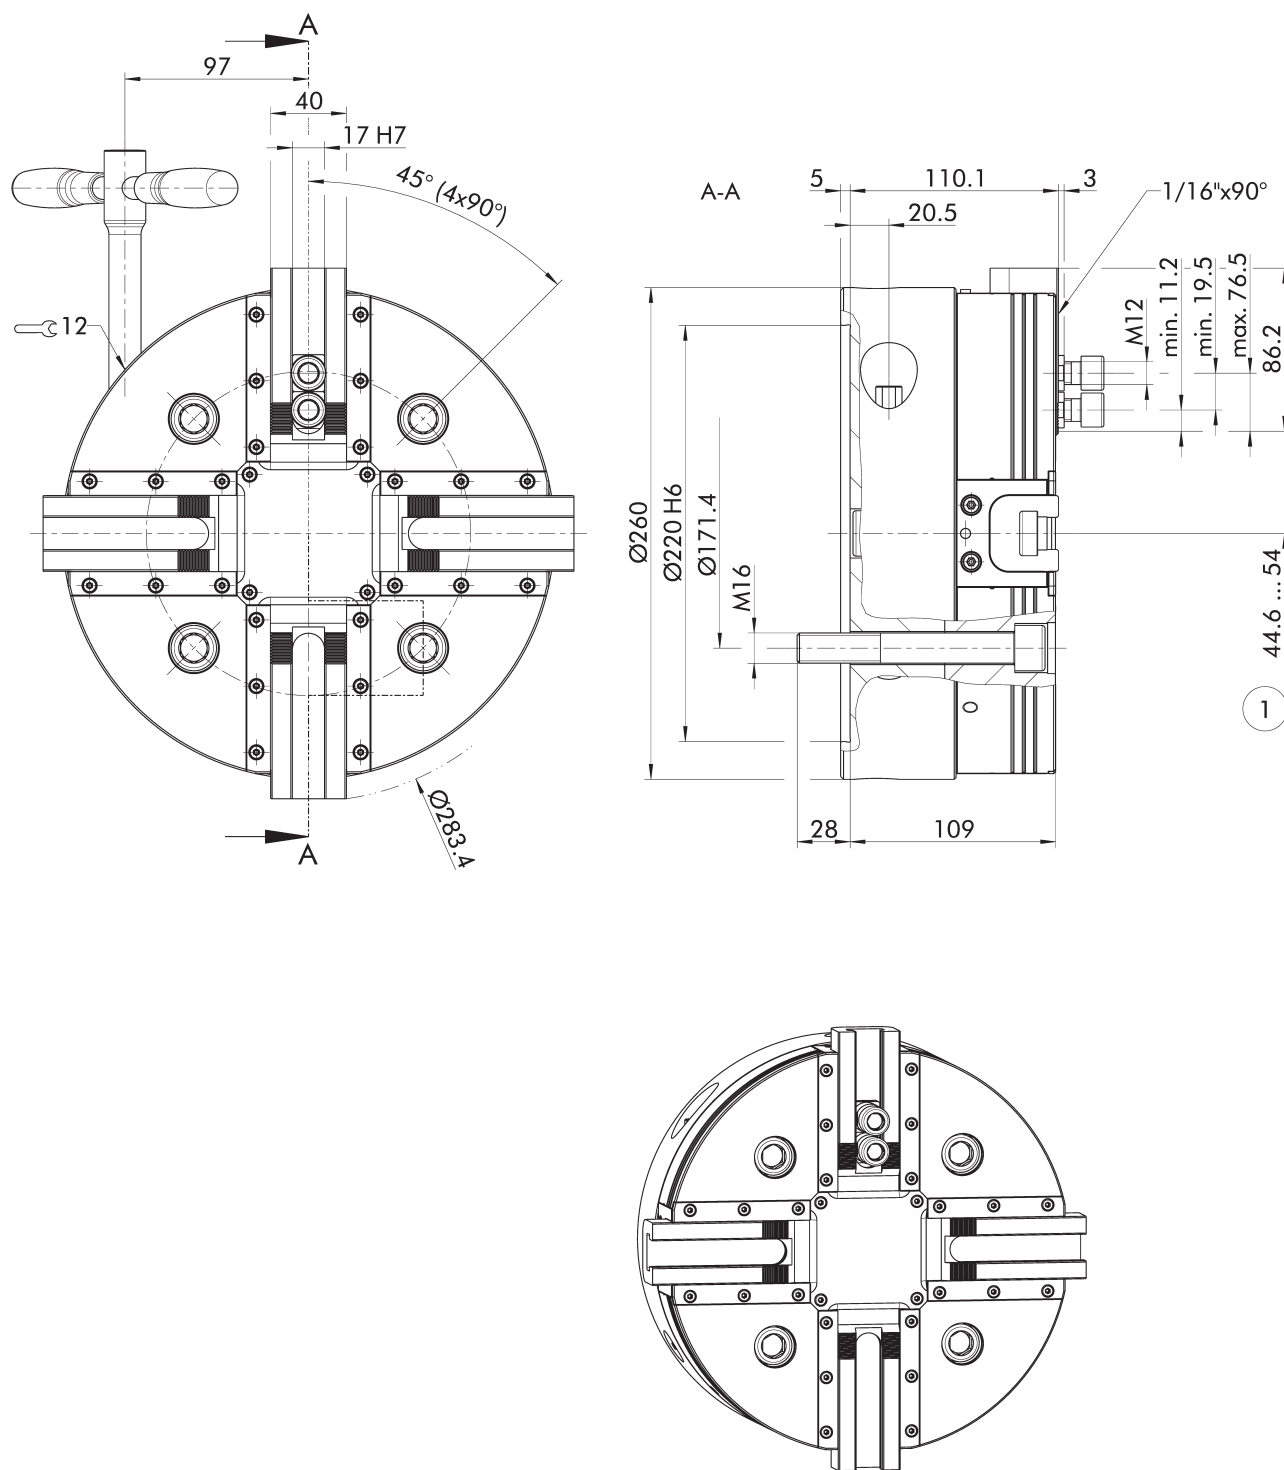

Chuck for shaft clamping drawn in open position.
Subject to technical changes.

① Distance to center of first tooth

Technical data

Spindle type	Spindle size	ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
ISO 702-4	Nr. 8 (Z220)	1389670	1/16" x 90°	2700	100	120	9.5	5.1	41

Scope of delivery

Chuck, T-nuts, or attachment screws for top jaws, chuck mounting screws, spanner wrench, eye bolt, operating manual; without top jaws, without locking cover

Notes

Stationary applications

For stationary use, the ROTA-M flex 2+2 can be retrofitted with standardized console and adapter plates (see accessories).



Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).


Clamping force, 2-jaw clamping


When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

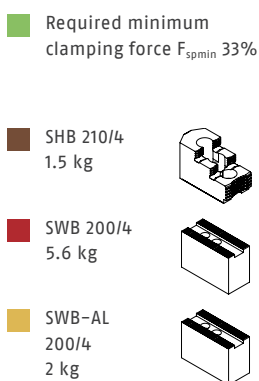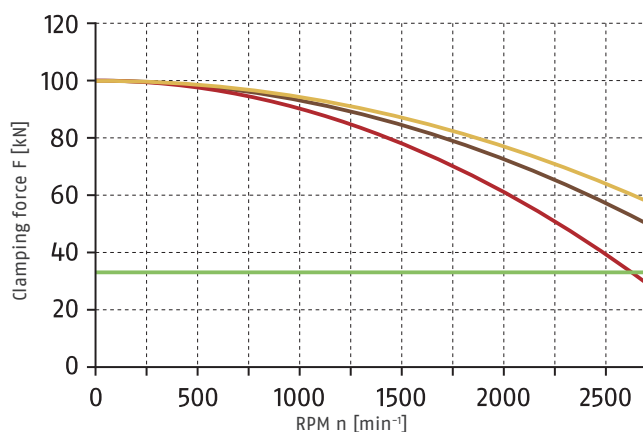

Load of base jaw guidance





12

Technical data

Spindle type	Spindle size	ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
ISO 702-4	Nr. 8 (Z220)	1400911	1/16" x 90°	2200	100	120	9.5	5.1	63

Scope of delivery

Chuck, T-nuts, or attachment screws for top jaws, chuck mounting screws, spanner wrench, eye bolt, operating manual; without top jaws, without locking cover

Notes

Stationary applications

For stationary use, the ROTA-M flex 2+2 can be retrofitted with standardized console and adapter plates (see accessories).


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).


Clamping force, 2-jaw clamping


When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

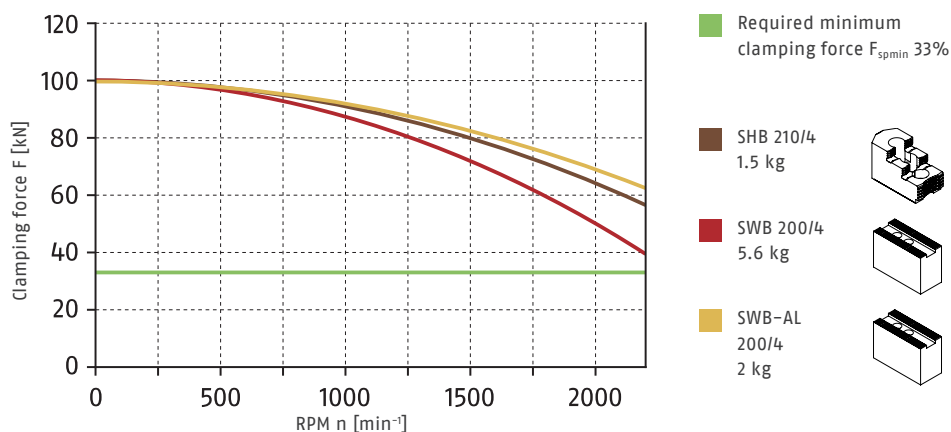

Load of base jaw guidance





14

Technical data

Spindle type	Spindle size	ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
ISO 702-4	Nr. 15 (Z380)	1407684	1/16" x 90°	1500	150	200	14.5	7.9	125

Scope of delivery

Chuck, T-nuts, or attachment screws for top jaws, chuck mounting screws, spanner wrench, eye bolt, operating manual; without top jaws, without locking cover

Notes

Stationary applications

For stationary use, the ROTA-M flex 2+2 can be retrofitted with standardized console and adapter plates (see accessories).


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).


Clamping force, 2-jaw clamping


When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

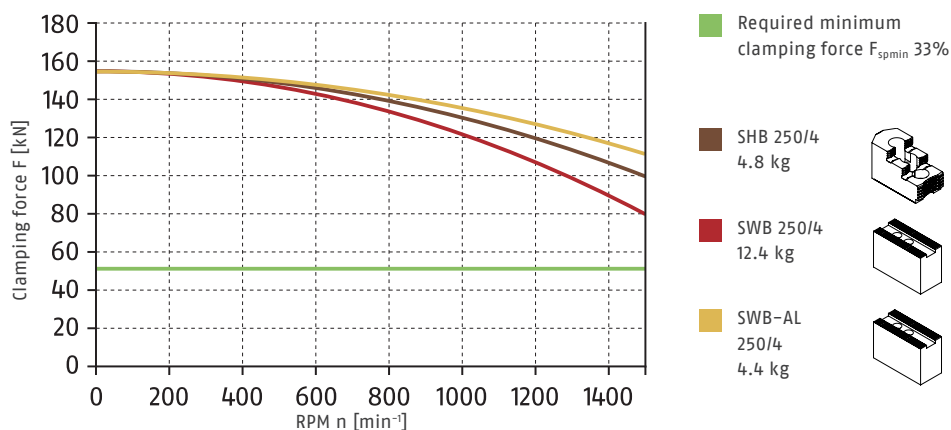

Load of base jaw guidance



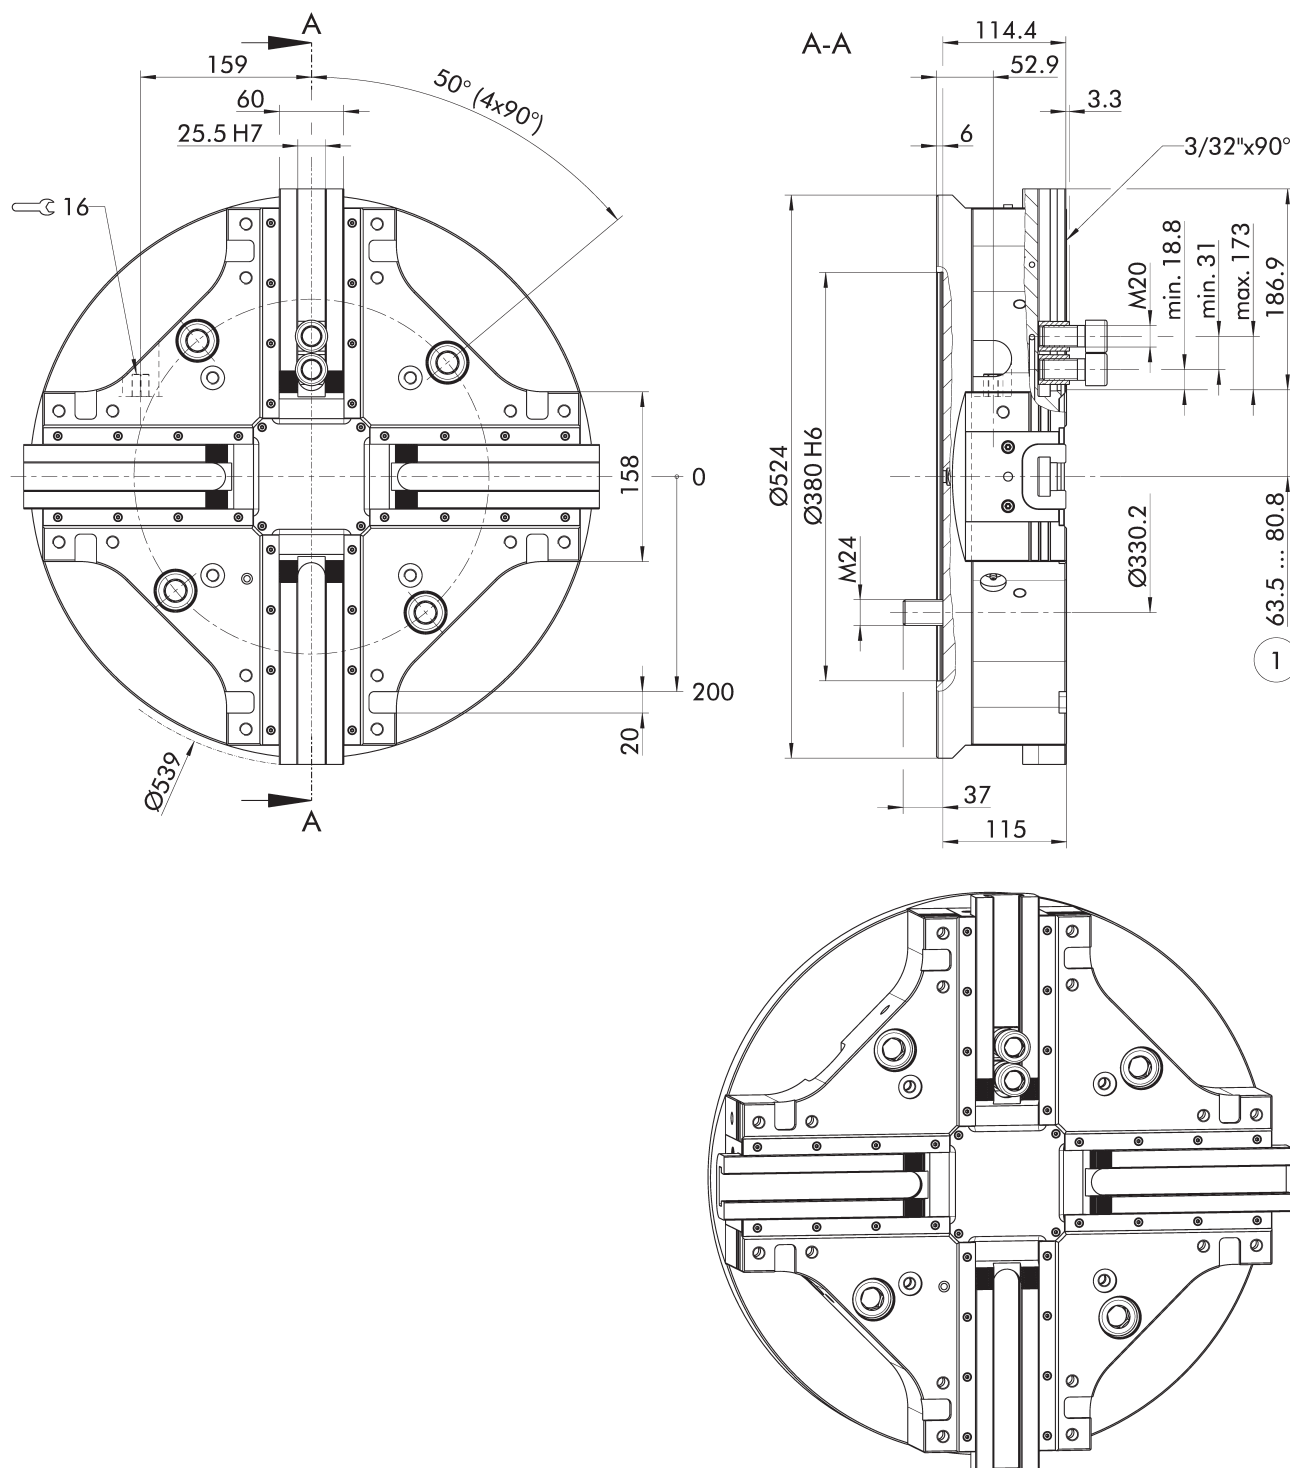

Chuck for shaft clamping drawn in open position.
Subject to technical changes.

① Distance to center of first tooth

Technical data

Spindle type	Spindle size	ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
ISO 702-4	Nr. 15 (Z380)	1573344	3/32" x 90°	1500	180	210	17.3	12	135

Scope of delivery

Chuck, T-nuts, or attachment screws for top jaws, chuck mounting screws, spanner wrench, eye bolt, operating manual; without top jaws, without locking cover

Notes

Stationary applications

For stationary use, the ROTA-M flex 2+2 can be retrofitted with standardized console and adapter plates (see accessories).


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).

Clamping force, 2-jaw clamping

When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

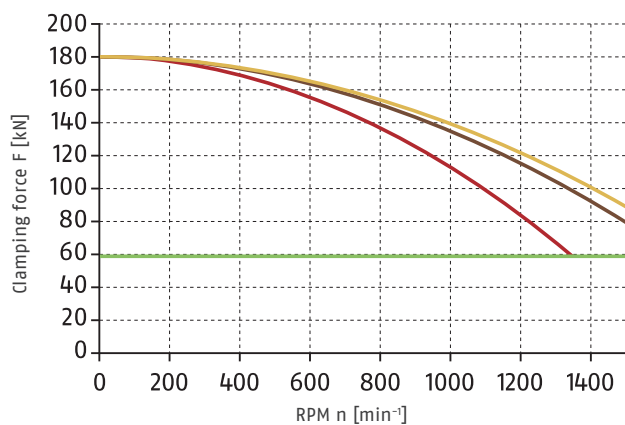

Required minimum clamping force F_{spmin} 33%

SHB 400/4
10.8 kg




SWB 400/4
21.6 kg




SWB-AL 400/4
8.6 kg



Load of base jaw guidance



$$M_{max} = 4550 \text{ Nm}$$

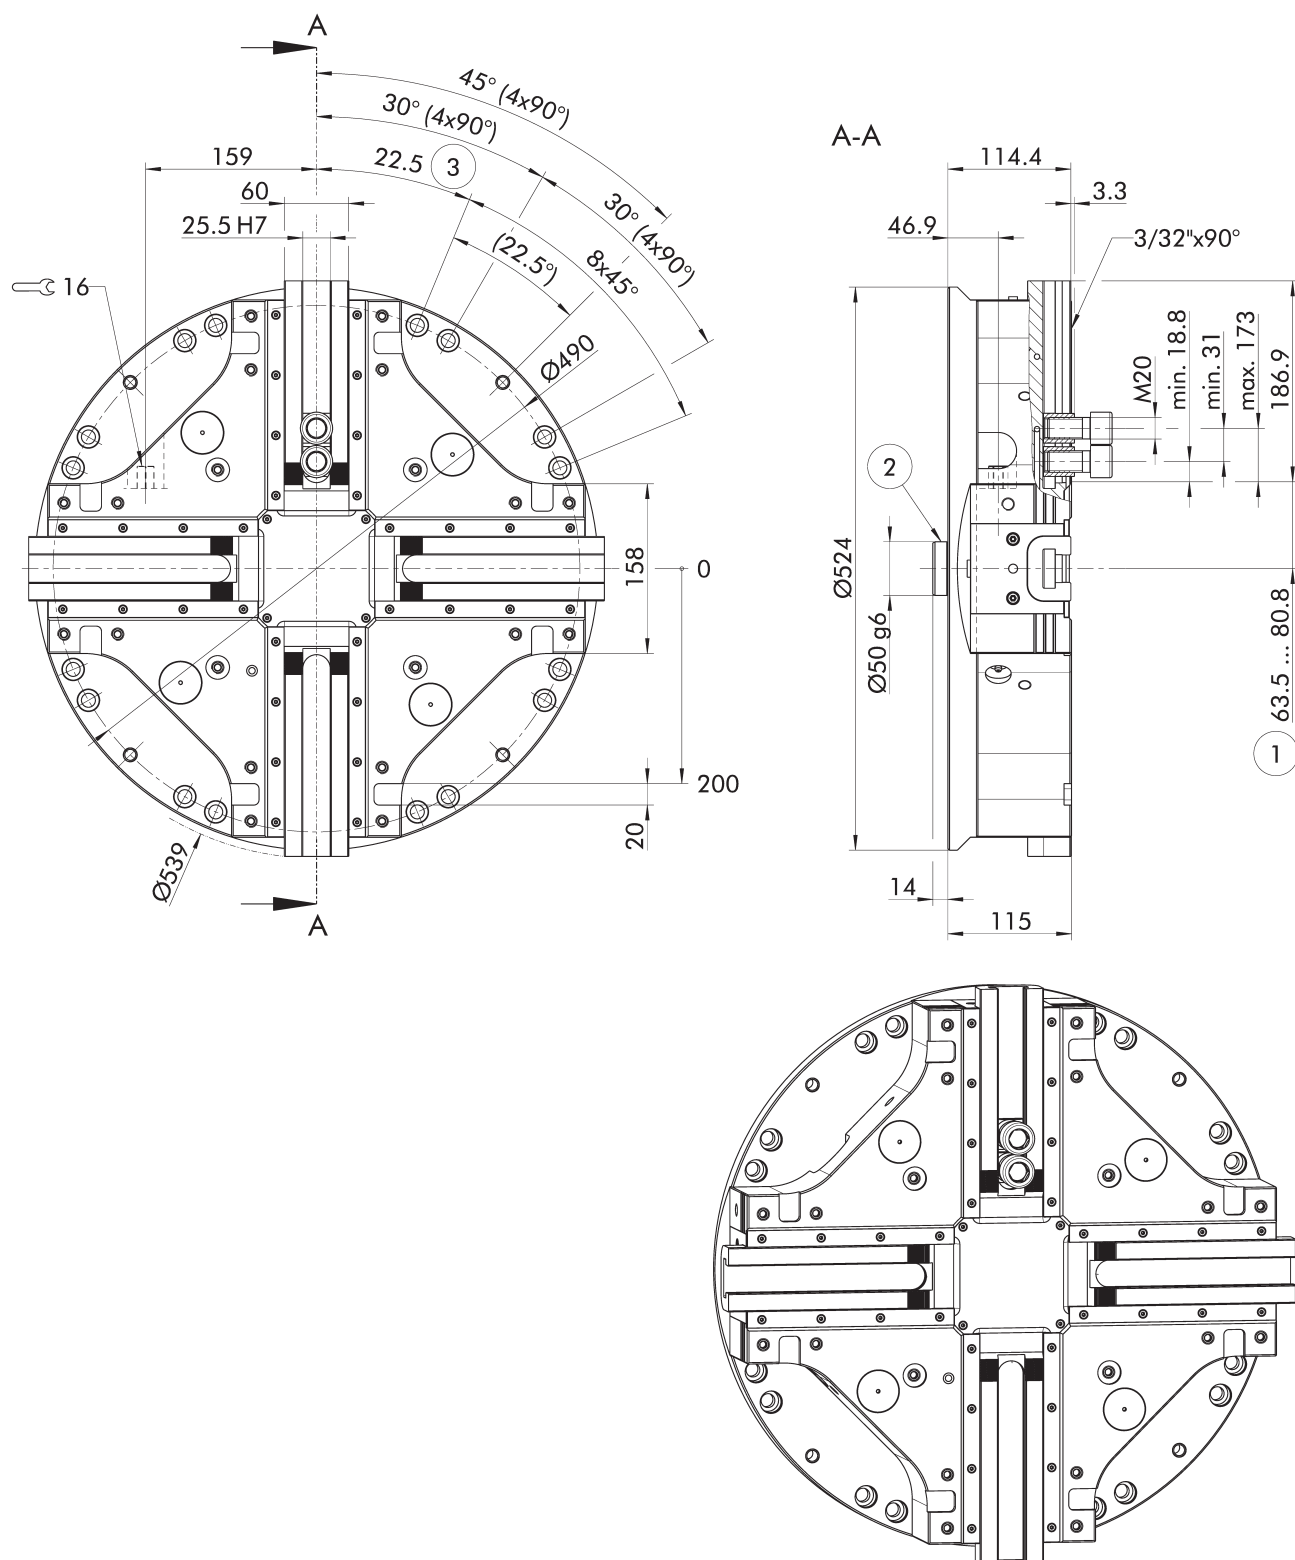

Chuck for shaft clamping drawn in open position.
Subject to technical changes.

- ① Distance to center of first tooth
- ② Centering bolt for centering the clamping pallet
- ③ Lathe chuck suitable for a 22.5° or 30° star groove table

Technical data

ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
1583348	3/32" x 90°	1500	180	210	17.3	12	130

Scope of delivery

Chuck, T-nuts, or attachment screws for top jaws, chuck mounting screws, spanner wrench, eye bolt, operating manual; without top jaws, without locking cover

Notes


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).

Clamping force, 2-jaw clamping

When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

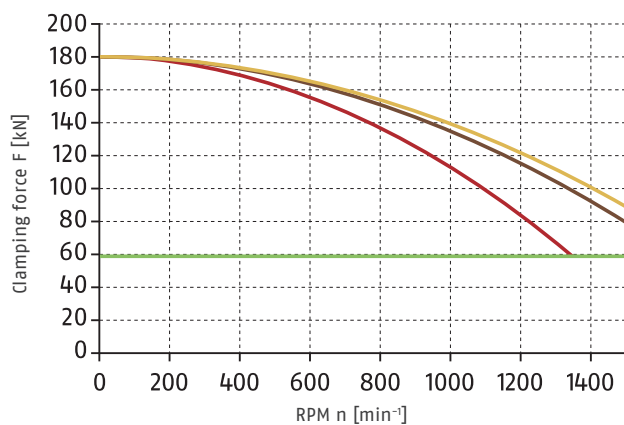

Required minimum clamping force F_{spmin} 33%

SHB 400/4
10.8 kg




SWB 400/4
21.6 kg




SWB-AL
400/4
8.6 kg



Load of base jaw guidance



$$M_{max} = 4550 \text{ Nm}$$



- 20

Technical data

ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
1570299	3/32" x 90°	1300	180	210	17.3	12	167

Scope of delivery

Chuck, centering pin, T-nuts, ratchet wrenches with adapter, eye bolt, mounting screws, nut for T-slots, bore closing cover, operating manual; without top jaws, without fixed workpiece stops, without locking cover

Notes


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).


Clamping force, 2-jaw clamping


When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

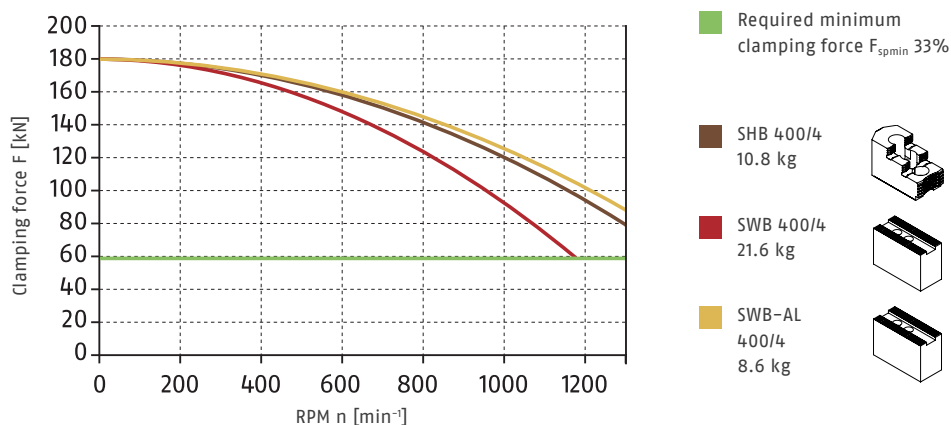

Load of base jaw guidance





- 22

Technical data

ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
1573345	Modul 2	1100	180	210	17.3	12	24.4

Scope of delivery

Chuck, centering pin, T-nuts, ratchet wrenches with adapter, eye bolt, mounting screws, nut for T-slots, bore closing cover, operating manual; without top jaws, without fixed workpiece stops, without locking cover

Notes


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).

Clamping force, 2-jaw clamping

When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

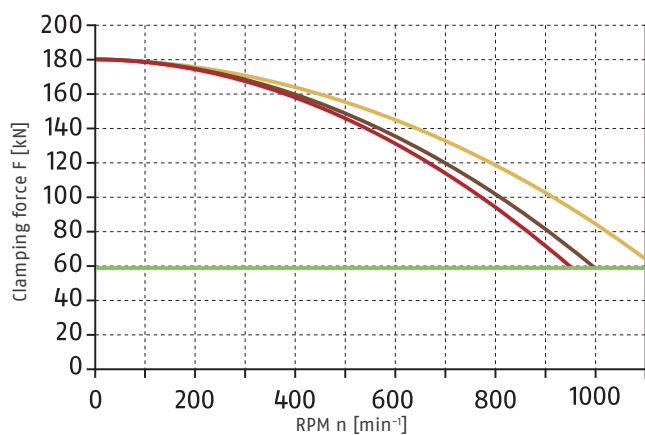

Required minimum clamping force F_{spmin} 33%

SP-HB-M
400-500/4
13.6 kg




SWB-M 400/4
21.8 kg






SWBL-M
400/4
25.2 kg



Load of base jaw guidance



$M_{max} = 4750 \text{ Nm}$

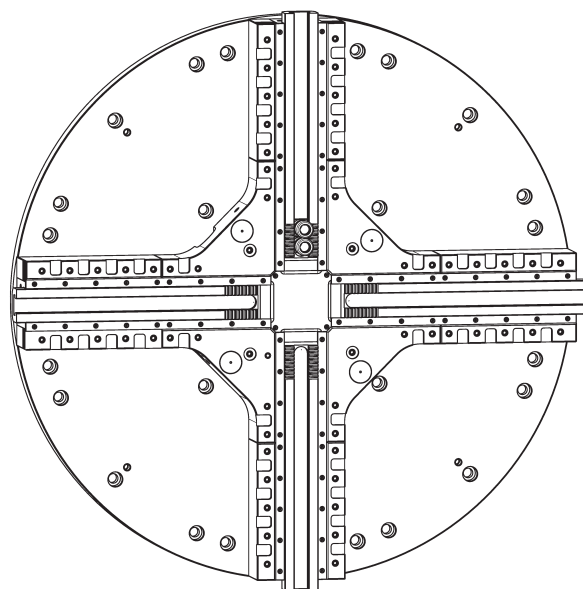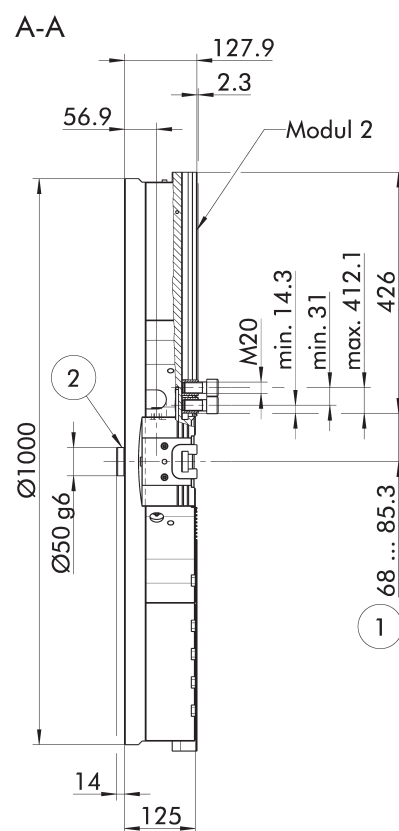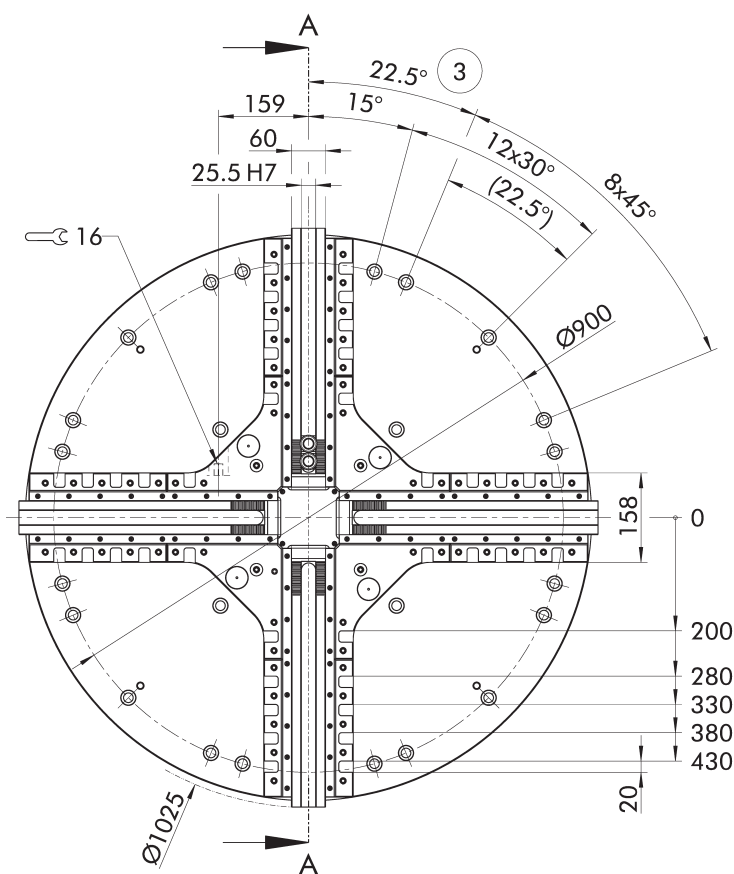

Chuck for shaft clamping drawn in open position.
Subject to technical changes.

- ① Distance to center of first tooth
- ② Centering bolt for centering the clamping pallet

- ③ Lathe chuck suitable for a 22.5° or 30° star groove table

Technical data

ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
1573346	Modul 2	850	180	210	17.3	12	396

Scope of delivery

Chuck, centering pin, T-nuts, ratchet wrenches with adapter, eye bolt, mounting screws, nut for T-slots, bore closing cover, operating manual; without top jaws, without fixed workpiece stops, without locking cover

Notes


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).

Clamping force, 2-jaw clamping

When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

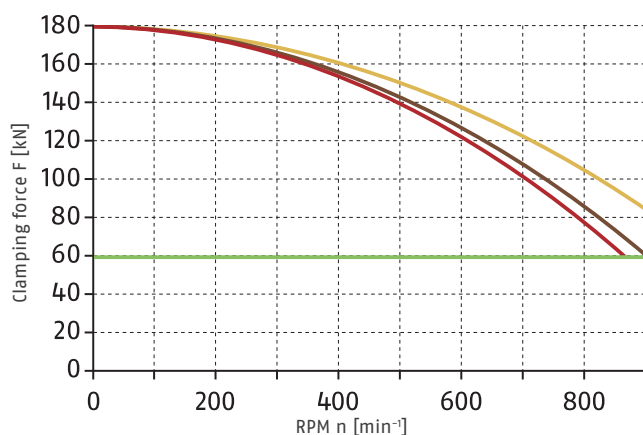


Required minimum clamping force F_{spmin} 33%

SP-HB-M
400-500/4
13.6 kg


SWB-M 400/4
21.8 kg

SWBL-M
400/4
25.2 kg

Load of base jaw guidance



$M_{max} = 4750 \text{ Nm}$

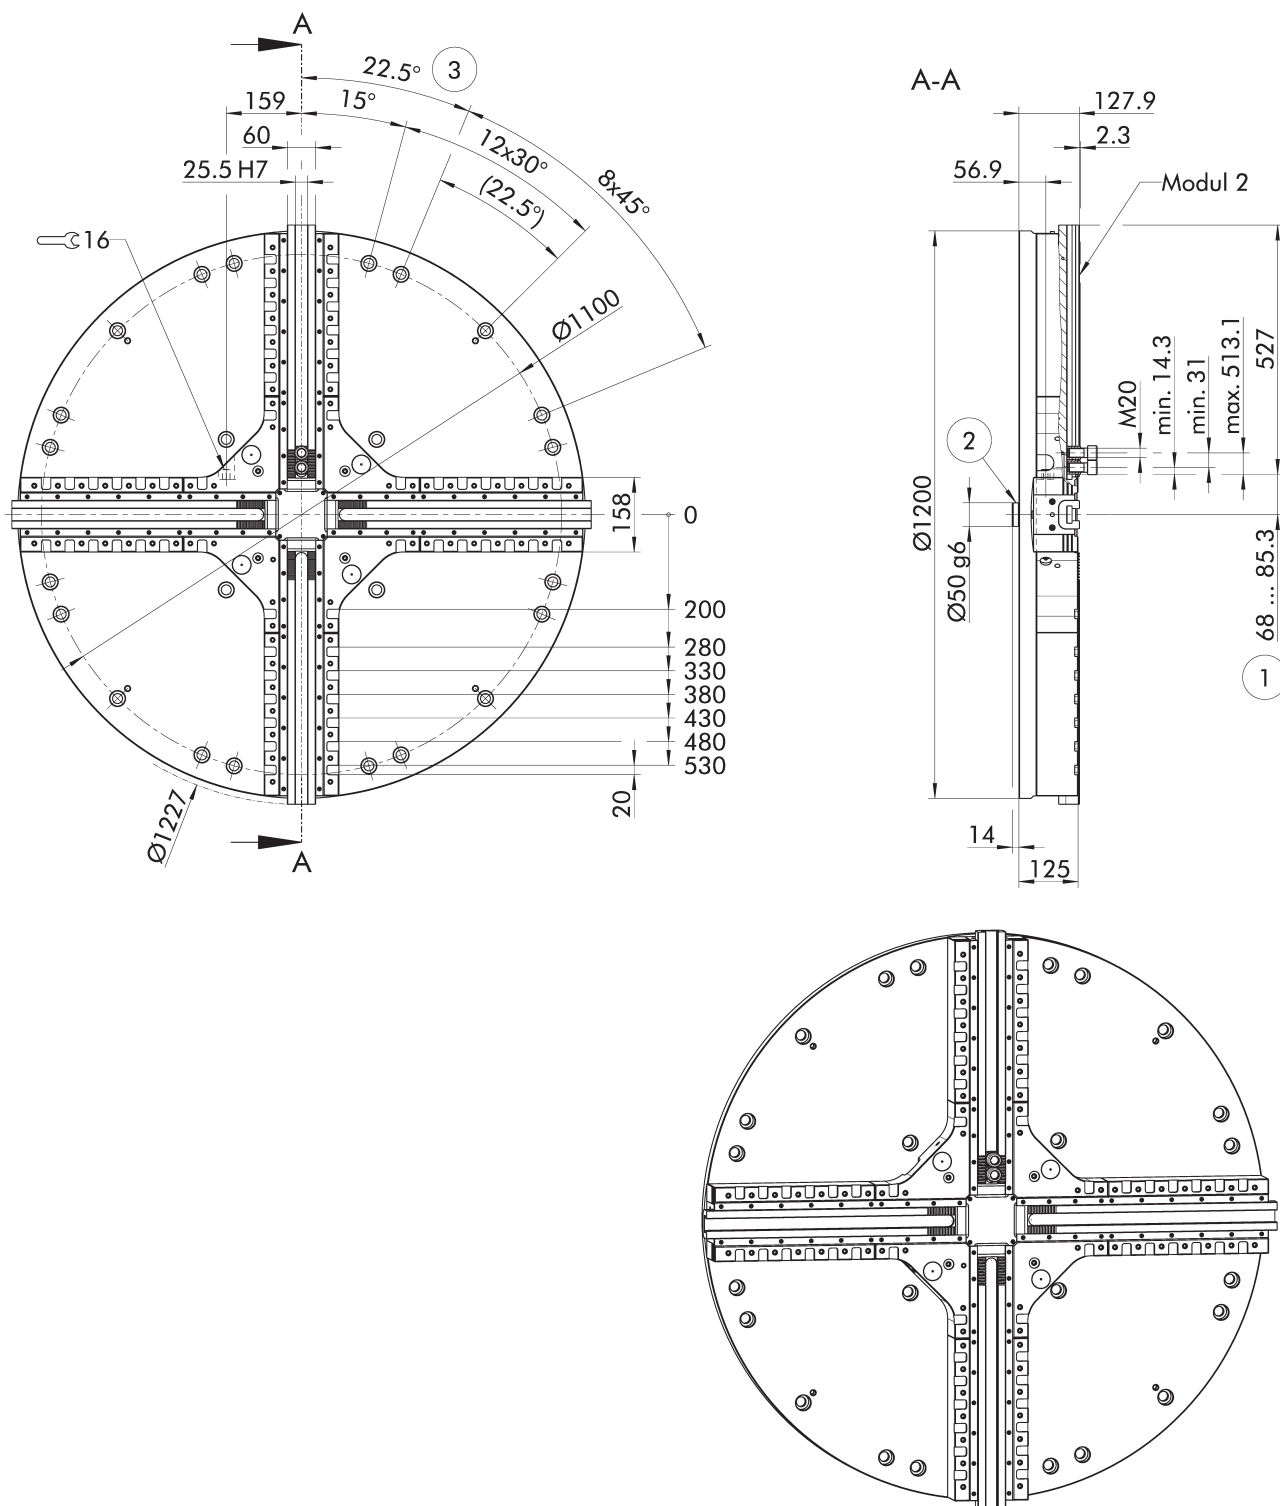

Chuck for shaft clamping drawn in open position.
Subject to technical changes.

- ① Distance to center of first tooth
- ② Centering bolt for centering the clamping pallet
- ③ Lathe chuck suitable for a 22.5° or 30° star groove table

Technical data

ID	Serration	Max. rotational speed [min ⁻¹]	Max. clamping force [kN]	Max. torque [Nm]	Stroke/jaw [mm]	Compensation stroke/jaw [mm]	Weight [kg]
1573347	Modul 2	750	180	210	17.3	12	530

Scope of delivery

Chuck, centering pin, T-nuts, ratchet wrenches with adapter, eye bolt, mounting screws, nut for T-slots, bore closing cover, operating manual; without top jaws, without fixed workpiece stops, without locking cover

Notes


Use of 2-jaw clamping

When using 2-jaw clamping, a locking cover is additionally required to block one pair of jaws (see accessories).

Clamping force, 2-jaw clamping

When changing to 2-jaw clamping, the maximum clamping force is halved at the same torque.

Clamping force-RPM-diagram

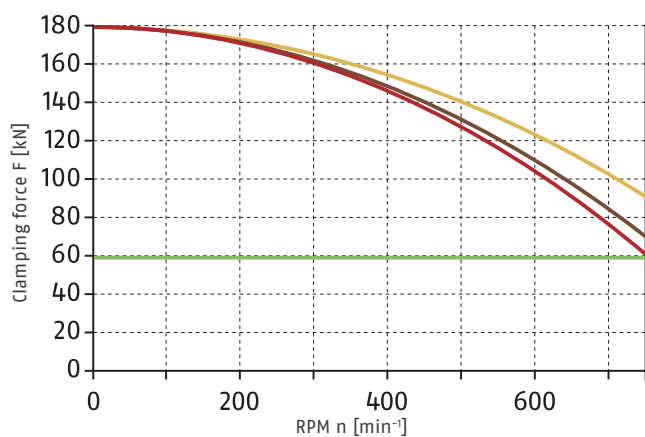

Required minimum clamping force F_{spmin} 33%

SP-HB-M
400-500/4
13.6 kg




SWB-M 400/4
21.8 kg



SWBL-M
400/4
25.2 kg




Load of base jaw guidance




$M_{max} = 4750 \text{ Nm}$

Soft top jaws


with fine serration 90°



SWB-AL
Soft top jaws



SWB
Soft top jaws



SWBL
Soft top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	H [mm]	L [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA-M flex 2+2 260	SWB-AL 200/4	1457304	17	40	60	90	43	22	M12	2.0
ROTA-M flex 2+2 260	SWB 200/4	1455397	17	40	60	90	43	22	M12	5.6
ROTA-M flex 2+2 260	SWBL 200/4	1630912	17	35	40	98	61	22	M12	3.4
ROTA-M flex 2+2 315	SWB-AL 200/4	1457304	17	40	60	90	43	22	M12	2.0
ROTA-M flex 2+2 315	SWB 200/4	1455397	17	40	60	90	43	22	M12	5.6
ROTA-M flex 2+2 315	SWBL 200/4	1630912	17	35	40	98	61	22	M12	3.4
ROTA-M flex 2+2 400	SWB-AL 250/4	1457305	21	50	80	120	62	28	M16	4.4
ROTA-M flex 2+2 400	SWB 250/4	1457272	21	50	80	120	62	28	M16	12.4
ROTA-M flex 2+2 400	SWBL 250-21/4	1630935	21	50	50	120	72	28	M16	7.5
ROTA-M flex 2+2 400	SWBL 315/4	1630936	21	50	50	140	82	28	M16	8.6
ROTA-M flex 2+2 500	SWB-AL 400/4	1457306	25.5	60	100	155	90	35	M20	8.6
ROTA-M flex 2+2 500	SWB 400/4	1457273	25.5	60	90	155	90	35	M20	21.6
ROTA-ML flex 2+2 500	SWB-AL 400/4	1457306	25.5	60	100	155	90	35	M20	8.6
ROTA-ML flex 2+2 500	SWB 400/4	1457273	25.5	60	90	155	90	35	M20	21.6
ROTA-ML flex 2+2 630	SWB-AL 400/4	1457306	25.5	60	100	155	90	35	M20	8.6
ROTA-ML flex 2+2 630	SWB 400/4	1457273	25.5	60	90	155	90	35	M20	21.6


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Hard stepped top jaws, Full grip jaws


with fine serration 90°



SHB
Hard stepped top jaws



SWB-SM
Full grip jaws



SWB-SA
Full grip jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	B1 [mm]	H [mm]	H2 [mm]	L [mm]	T [mm]	a [mm]	b [mm]	c [mm]	Screws	m/SET [kg]
ROTA-M flex 2+2 260	SWB-SM 200/4	1457314	17	140	40	60	50	69.5		35	22		M12	8.6
ROTA-M flex 2+2 260	SWB-SM 201/4	1630915	17	140	40	75	65	69.5		35	22		M12	14.4
ROTA-M flex 2+2 260	SWB-SA 200/4	1630913	17	140	40	58	48	72.5		35	22		M12	4.5
ROTA-M flex 2+2 260	SWB-SA 201/4	1630914	17	140	40	75	65	72.5		35	22		M12	5.6
ROTA-M flex 2+2 260	SHB 210/4	1457276	17	40		49		84.2	12	28.7	19	19	M12	1.5
ROTA-M flex 2+2 315	SWB-SM 200/4	1457314	17	140	40	60	50	69.5		35	22		M12	8.6
ROTA-M flex 2+2 315	SWB-SM 201/4	1630915	17	140	40	75	65	69.5		35	22		M12	14.4
ROTA-M flex 2+2 315	SWB-SA 200/4	1630913	17	140	40	58	48	72.5		35	22		M12	4.5
ROTA-M flex 2+2 315	SWB-SA 201/4	1630914	17	140	40	75	65	72.5		35	22		M12	5.6
ROTA-M flex 2+2 315	SHB 210/4	1457276	17	40		49		84.2	12	28.7	19	19	M12	1.5
ROTA-M flex 2+2 400	SWB-SM 315/4	1457315	21	240	50	70	55	110		60	28		M16	26.6
ROTA-M flex 2+2 400	SWB-SA 315/4	1630937	21	240	50	78	63	117		70	28		M16	16.0
ROTA-M flex 2+2 400	SHB 250/4	1457277	21	50		58		103.5	14	34	25	25	M16	4.8
ROTA-M flex 2+2 500	SWB-SM 400/4	1457316	25.5	330	60	85	55	155		83.5	35		M20	55.2
ROTA-M flex 2+2 500	SWB-SA 400/4	1609912	25.5	330	150	98	68	160		84.5	35		M20	35.3
ROTA-M flex 2+2 500	SHB 400/4	1457278	25.5	60		75		140	18	53	31	31	M20	10.8
ROTA-ML flex 2+2 500	SWB-SM 400/4	1457316	25.5	330	60	85	55	155		83.5	35		M20	55.2
ROTA-ML flex 2+2 500	SWB-SA 400/4	1609912	25.5	330	150	98	68	160		84.5	35		M20	35.3
ROTA-ML flex 2+2 500	SHB 400/4	1457278	25.5	60		75		140	18	53	31	31	M20	10.8
ROTA-ML flex 2+2 630	SWB-SM 400/4	1457316	25.5	330	60	85	55	155		83.5	35		M20	55.2
ROTA-ML flex 2+2 630	SWB-SA 400/4	1609912	25.5	330	150	98	68	160		84.5	35		M20	35.3
ROTA-ML flex 2+2 630	SHB 400/4	1457278	25.5	60		75		140	18	53	31	31	M20	10.8

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Universal claw jaws

with fine serration 90°



SZAU/4
Universal claw jaws

Technical data

Chuck type	Clamping range ØD	Swing diameter SDmax	Description	ID	N	B	H	L	T	G	b	m/SET
	[mm]	[mm]			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[kg]
ROTA-M flex 2+2 260	141 - 205	292	SZAU 200/4	1457355	17	40	52	74.1	25	M6	35	2.0
ROTA-M flex 2+2 315	144 - 259	346	SZAU 200/4	1457355	17	40	52	74.1	25	M6	35	2.0
ROTA-M flex 2+2 400	180 - 331	444	SZAU 250/4	1457356	21	50	55	86	25	M6	45	4.1
ROTA-M flex 2+2 500	102 - 426	571	SZAU 400/4	1457357	25.5	60	75	114.5	33	M6	60	8.2
ROTA-ML flex 2+2 500	102 - 426	571	SZAU 400/4	1457357	25.5	60	75	114.5	33	M6	60	8.2
ROTA-ML flex 2+2 630	102 - 534	679	SZAU 400/4	1457357	25.5	60	75	114.5	33	M6	60	8.2

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

T-nut

with fine serration 90°




NS
T-nut

Chuck type	Description	ID	N	B	H	H1	L	Cyl.-screw	Max. adm. tightening torque
			[mm]	[mm]	[mm]	[mm]	[mm]		[Nm]
ROTA-M flex 2+2 260	NS 120	0140101	17	22.5	23	9	19.5	M12 x 30	70
ROTA-M flex 2+2 315	NS 120	0140101	17	22.5	23	9	19.5	M12 x 30	70
ROTA-M flex 2+2 400	NS 160	0140102	21	28.5	27	11	24.5	M16 x 35	150
ROTA-M flex 2+2 500	NS 200	0140103	25.5	35.8	29	11	27.8	M20 x 40	220
ROTA-ML flex 2+2 500	NS 200	0140103	25.5	35.8	29	11	27.8	M20 x 40	220
ROTA-ML flex 2+2 630	NS 200	0140103	25.5	35.8	29	11	27.8	M20 x 40	220
ROTA-ML flex 2+2 800	NS 200	0140103	25.5	35.8	29	11	27.8	M20 x 40	220
ROTA-ML flex 2+2 1000	NS 200	0140103	25.5	35.8	29	11	27.8	M20 x 40	220
ROTA-ML flex 2+2 1200	NS 200	0140103	25.5	35.8	29	11	27.8	M20 x 40	220


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

Hard stepped top jaws

with fine serration 90°



Jaw position I



Jaw position II

O.D. clamping


Chuck type	Description	ID	A1 [mm]	A2 [mm]	A3 [mm]	A4 [mm]
ROTA-M flex 2+2 260	SHB 210/4	1457276	23 - 161	48 - 173	98 - 223	143 - 260
ROTA-M flex 2+2 315	SHB 210/4	1457276	23 - 215	47 - 240	97 - 290	143 - 315
ROTA-M flex 2+2 400	SHB 250/4	1457277	40 - 283	69 - 286	150 - 369	224 - 443
ROTA-M flex 2+2 500	SHB 400/4	1457278	49 - 335	62 - 375	164 - 478	266 - 500
ROTA-ML flex 2+2 500	SHB 400/4	1457278	49 - 335	62 - 375	164 - 478	266 - 500
ROTA-ML flex 2+2 630	SHB 400/4	1457278	49 - 444	62 - 500	164 - 605	266 - 630

I.D. clamping


Chuck type	Description	ID	I1 [mm]	I2 [mm]	I3 [mm]
ROTA-M flex 2+2 260	SHB 210/4	1457276	98 - 236	144 - 282	192 - 330
ROTA-M flex 2+2 315	SHB 210/4	1457276	98 - 289	144 - 335	192 - 384
ROTA-M flex 2+2 400	SHB 250/4	1457277	98 - 333	168 - 407	247 - 487
ROTA-M flex 2+2 500	SHB 400/4	1457278	130 - 410	228 - 513	328 - 615
ROTA-ML flex 2+2 500	SHB 400/4	1457278	130 - 410	228 - 513	328 - 615
ROTA-ML flex 2+2 630	SHB 400/4	1457278	130 - 519	228 - 622	328 - 724

Soft top jaws

Modul 2



SWB-M/4
Soft top jaws



SWBL-M/4
Soft top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	H [mm]	L [mm]	a [mm]	b [mm]	Screws	m/SET [kg]
ROTA-ML flex 2+2 800	SWBL-M 400/4	1457325	25.5	60	90	195	110	35		25.2
ROTA-ML flex 2+2 800	SWB-M 400/4	1457324	25.5	60	90	157	30	35	M20	21.8
ROTA-ML flex 2+2 1000	SWBL-M 400/4	1457325	25.5	60	90	195	110	35		25.2
ROTA-ML flex 2+2 1000	SWB-M 400/4	1457324	25.5	60	90	157	30	35	M20	21.8
ROTA-ML flex 2+2 1200	SWBL-M 400/4	1457325	25.5	60	90	195	110	35		25.2
ROTA-ML flex 2+2 1200	SWB-M 400/4	1457324	25.5	60	90	157	30	35	M20	21.8

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

Hard stepped top jaws

Modul 2



SP-HB-M/4
Hard stepped top jaws


Technical data

Chuck type	Description	ID	N [mm]	B [mm]	H [mm]	L [mm]	T [mm]	a [mm]	b [mm]	c [mm]	Screws	m/SET [kg]
ROTA-ML flex 2+2 800	SP-HB-M 400-500/4	1457323	25.5	57.5	73	159.1	22	38.3	42	42	M20	13.6
ROTA-ML flex 2+2 1000	SP-HB-M 400-500/4	1457323	25.5	57.5	73	159.1	22	38.3	42	42	M20	13.6
ROTA-ML flex 2+2 1200	SP-HB-M 400-500/4	1457323	25.5	57.5	73	159.1	22	38.3	42	42	M20	13.6

Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on schunk.com

Universal claw jaws

Modul 2



SZAU-M/4
 Universal claw jaws


Technical data

Chuck type	Clamping range ØD	Swing diameter SDmax	Description	ID	N	B	H	L	T	G	b	m/SET
	[mm]	[mm]			[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[kg]
ROTA-ML flex 2+2 800	102 – 710	855	SZAU-M 400/4	1457627	25.5	60	75	114.5	33	M6	60	8.2
ROTA-ML flex 2+2 1000	102 – 913	1058	SZAU-M 400/4	1457627	25.5	60	75	114.5	33	M6	60	8.2
ROTA-ML flex 2+2 1200	102 – 1115	1260	SZAU-M 400/4	1457627	25.5	60	75	114.5	33	M6	60	8.2


Our complete range of chuck jaws can be found online in our Chuck Jaw Quickfinder and on [schunk.com](https://www.schunk.com)

Hard stepped top jaws

Modul 2



Jaw position I



Jaw position II

O.D. clamping

Chuck type	Description	ID	A1 [mm]	A2 [mm]	A4 [mm]
ROTA-ML flex 2+2 800	SP-HB-M 400-500/4	1457323	49 - 614	57 - 630	245 - 800
ROTA-ML flex 2+2 1000	SP-HB-M 400-500/4	1457323	49 - 815	57 - 831	245 - 1000
ROTA-ML flex 2+2 1200	SP-HB-M 400-500/4	1457323	49 - 1016	57 - 1031	245 - 1200

I.D. clamping

Chuck type	Description	ID	I1 [mm]	I3 [mm]
ROTA-ML flex 2+2 800	SP-HB-M 400-500/4	1457323	181 - 744	366 - 933
ROTA-ML flex 2+2 1000	SP-HB-M 400-500/4	1457323	181 - 944	366 - 1133
ROTA-ML flex 2+2 1200	SP-HB-M 400-500/4	1457323	181 - 1146	366 - 1335

Console jaws

Console jaw movable

With 3/32" x 90° or module 2 serration.
For suitable top jaws, see "Interface" column.



Suitable for	Description	Interface	ID
ROTA-ML flex 2+2 500			
ROTA-ML flex 2+2 630	SKB-SV90° 100	W-100-1	1572700
ROTA-ML flex 2+2 800			
ROTA-ML flex 2+2 1000			
ROTA-ML flex 2+2 1200	SKB-M2 100	W-100-1	1572701

Console jaw fixed

Can be positioned in the chuck face via T-slots.
For suitable top jaws, see "Interface" column.



Suitable for	Description	Interface	ID
ROTA-ML flex 2+2 500			
ROTA-ML flex 2+2 630			
ROTA-ML flex 2+2 800			
ROTA-ML flex 2+2 1000			
ROTA-ML flex 2+2 1200	SKB-F 100	W-100-1	1572658

Top jaws

Jaw profiled

For increasing the friction between jaw and workpiece without clamping impressions.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBD 100-35-10	100	35	10	W-100-1	1373346

Stepped jaw

With ground step, 8 mm.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS 100-35-10-5	100	35	10	W-100-1	1373325

Serrated jaw

For increasing the friction between jaw and workpiece with minimal clamping impressions.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBC 100-35-11	100	35	11	W-100-1	1373267

Stepped jaw

With coated step, 5 mm.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-W 100-35-10-5	100	35	10	W-100-1	1395510

Ground jaw

With a completely ground clamping face.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBP 100-35-10	100	35	10	W-100-1	1373272

Stepped jaw

With grip step, 3 mm.
For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G3 100-35-10	100	35	10	W-100-1	1373330

Soft jaw

Hardenable jaws for rework at the customer site, e.g. for incorporating contours or special shapes.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBW 100-35-16	100	35	16	W-100-1	1373287

Stepped jaw

With grip step, 5 mm.
For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G5 100-35-10	100	35	10	W-100-1	1373333

Stepped jaw

With grip step, 8 mm.
For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-G8 100-35-10	100	35	10	W-100-1	1373337

Stepped jaw

With carbide grip step, 3 mm.
For embossed clamping of hardened materials up to 58 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-CG3 100-35-10	100	35	10	W-100-1	1428440

Stepped jaw

With carbide grip step, 5 mm.
For embossed clamping of hardened materials up to 58 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBS-CG5 100-35-12	100	35	12	W-100-1	1428441

Grip jaw

For embossed clamping of unhardened materials up to 22 HRC.



Description	Width mm	Height mm	Depth mm	Interface	ID
GBG 100-35-10	100	35	10	W-100-1	1373282

Accessories

Clamping force tester

For measuring the jaw clamping force of 2-, 3-, and 6-jaw chucks up to 6,000 RPM as well as 3-jaw clamping force blocks.



Suitable for	Description	ID
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315		
ROTA-M flex 2+2 400		
ROTA-M flex 2+2 500		
ROTA-ML flex 2+2 500		
ROTA-ML flex 2+2 630		
ROTA-ML flex 2+2 800		
ROTA-ML flex 2+2 1000		
ROTA-ML flex 2+2 1200	IFT Set	1404235

Measuring head adapter for 4-jaw clamping

For use as an extension of the IFT measuring head for measuring the jaw clamping force of 4-jaw chucks.



Suitable for	Description	ID
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315		
ROTA-M flex 2+2 400		
ROTA-M flex 2+2 500		
ROTA-ML flex 2+2 500		
ROTA-ML flex 2+2 630		
ROTA-ML flex 2+2 800		
ROTA-ML flex 2+2 1000		
ROTA-ML flex 2+2 1200	IFT MA4	1452686

Extension set for large chucks

For use as an extension of the IFT measuring head for measuring the jaw clamping force of large chucks of Ø 400 mm and more.



Suitable for	Description	ID
ROTA-M flex 2+2 400		
ROTA-M flex 2+2 500		
ROTA-ML flex 2+2 500		
ROTA-ML flex 2+2 630		
ROTA-ML flex 2+2 800		
ROTA-ML flex 2+2 1000		
ROTA-ML flex 2+2 1200	IFT adapter set	1498512

Torque wrench

Torque wrench for actuation of SCHUNK manual lathe chucks.



Suitable for	Description	ID
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315		
ROTA-M flex 2+2 400	SSH-D-1/2" 40-200	9938065
ROTA-M flex 2+2 500		
ROTA-ML flex 2+2 500		
ROTA-ML flex 2+2 630		
ROTA-ML flex 2+2 800		
ROTA-ML flex 2+2 1000		
ROTA-ML flex 2+2 1200	SSH-D-1/2" 60-300	1301281

Ratchets

Ratchet for fast actuation of SCHUNK manual lathe chucks.



Suitable for	Description	ID
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315		
ROTA-M flex 2+2 400		
ROTA-M flex 2+2 500		
ROTA-ML flex 2+2 500		
ROTA-ML flex 2+2 630		
ROTA-ML flex 2+2 800		
ROTA-ML flex 2+2 1000		
ROTA-ML flex 2+2 1200	SSH-K 1/2"-350	1151118

Hexagon actuation wrench

Spanner wrench for manual actuation of the SCHUNK manual lathe chucks with hexagonal connections.



Suitable for	Description	ID
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315	SSH-SK SW12-160	1330869
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315	SSH-SL SW12-260	8704921
ROTA-M flex 2+2 400		
ROTA-M flex 2+2 500	SSH-SK SW16-230	1330894
ROTA-M flex 2+2 400		
ROTA-M flex 2+2 500	SSH-SL SW16-330	8704923

Hexagon spanner wrench adapter with ejector

For use as an attachment for a torque wrench and ratchet for actuating SCHUNK manual lathe chucks with hexagonal connection.



Suitable for	Description	ID
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315	SAS-I 1/2"-SW12	8705487
ROTA-M flex 2+2 400		
ROTA-M flex 2+2 500		
ROTA-ML flex 2+2 500		
ROTA-ML flex 2+2 630		
ROTA-ML flex 2+2 800	SAS-I 1/2"-SW16	8705471
ROTA-ML flex 2+2 1000	SAS-I 1/2"-SW16	1583509
ROTA-ML flex 2+2 1200	SAS-I 1/2"-SW16	1583524

Consol plate

For mounting the ROTA-M flex 2+2 manual lathe chucks on T-slot tables. The console plate must still be adapted to the respective machine table.



Suitable for	Description	ID
ROTA-M flex 2+2 260	KSL flex 260	1452440
ROTA-M flex 2+2 315	KSL flex 315	1452441
ROTA-M flex 2+2 400	KSL flex 400	1452442

Adapter plate

As a standard size for sizes Ø 260 to Ø 400 mm.

Suitable for clamping station VERO-S ...



Suitable for	Description	ID
NSL3 400	ADP-NSL3 400	1454646
NSL3 turn 450-3	ADP-NSL3 turn 450	1454659
NSL3 turn 450-3-Z	ADP-NSL3 turn 450-Z	1454670
NSL3 turn 570-5	ADP-NSL3 turn 570	1454668
NSL3 turn 570-5-Z	ADP-NSL3 turn 570-Z	1454671

Locking cover

For locking of a jaw pair to realize a two jaw clamping.



Suitable for	Description	ID
ROTA-M flex 2+2 260		
ROTA-M flex 2+2 315	SLC 260-315	1471984
ROTA-M flex 2+2 400	SLC 400	1471987
ROTA-M flex 2+2 500		
ROTA-ML flex 2+2 500		
ROTA-ML flex 2+2 630		
ROTA-ML flex 2+2 800		
ROTA-ML flex 2+2 1000		
ROTA-ML flex 2+2 1200	SLC 500-1200	1471989

Grease

LINOMAX plus

High-performance grease as standard for regularly lubricating SCHUNK manual and power lathe chucks and steady rests.



Bundle	Description	ID
Cartridge	LINOMAX plus cartridge	1342585
Can	LINOMAX plus can	1342586
Bucket	LINOMAX plus bucket	1342587

Grease gun

Auxiliary tools for lubrication of all kinds of SCHUNK products. The grease gun can be used for cartridges of all types of SCHUNK grease.



Bundle	Description	ID
Cartridge	Grease gun	9900543



H.-D. SCHUNK GmbH & Co.
Spanntechnik KG

Lothringer Str. 23
D-88512 Mengen
Tel. +49-7572-7614-1300
Fax +49-7572-7614-1039
CMM@de.schunk.com
schunk.com